

GuideTRAX V3.2 (HL) User Manual

Software Version:	3.2
Part Number:	1-1257
Revision:	A
Issue Date:	March 2007

Copyright Notice

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical photocopying, recording, or otherwise, without the prior written permission of RINEX Technology.

Disclaimer

No liability is assumed with respect to the use of the information contained herein. While every precaution has been taken in the preparation of this publication, RINEX assumes no responsibility for errors or omissions nor is any liability assumed for damages resulting from the use of the information contained herein. Further this publication and features described herein are subject to change without notice.

Use of this system is strictly limited to providing steering assistance to the operator who must remain in control of the vehicle at all times.

RINEX, including its officers servants and agents, does not make any representation to any party and will not accept any responsibility or liability whatsoever for any loss or damage of whatever nature suffered by any such person or corporation choosing or seeking to use this system or any part thereof.

By use of this system you agree that RINEX is not liable or responsible for any damage whatsoever to the vehicle, any property, personal injuries, or death that may result from the use or abuse of this system.

GuideTRAX V3 User Manual

Written for GuideTRAX Version 3.2

Publication Date, March 2007

Copyright © 2007 by RINEX Technology. All rights reserved.

Acknowledgements

Windows XP® is registered to Microsoft Corp.

Other products and trademarks mentioned in this manual are the property of their registered owners.

RINEX TECHNOLOGY

ABN: 30 029 441 181

Office Location :

19 Lyall Street
South Perth WA 6151

Postal Address :

PO Box 211
South Perth WA 6951

Telephone :

Local : (08) 9474 4771
International : +61-8-9474 4771

Facsimile :

Local : (08) 9474 4772
International : +61-8-9474 4772

Internet :

<http://www.RINEX.com.au>

Email :

info@RINEX.com.au

Products

This warranty covers all products (the "Products") manufactured and or sold by RINEX Technology or their authorised dealers.

RINEX Technology Limited Warranty

RINEX Technology ("RINEX") hereby warrants solely to the end purchaser of the Products, subject to the exclusions and procedures set forth herein below, that the Products sold to such end purchaser shall be free, under normal use and maintenance, from defects in material and workmanship for a period of 12 months from delivery. Repairs and replacement components are warranted, subject to the exclusions and procedures set forth below, to be free, under normal use and maintenance, from defects in material and workmanship for 90 days from delivery, or for the balance of the original warranty period, whichever is greater.

Purchaser's Exclusive Remedy

The end purchaser's exclusive remedy under this warranty shall be limited to the repair or replacement, at the option of RINEX, of any defective Products or components thereof. The end user shall notify RINEX or a RINEX authorised dealer immediately of any claimed defect. Repairs shall be made through RINEX only.

Exclusions

RINEX does not warrant damage occurring in transit or due to misuse, abuse, improper installation, neglect, alteration, abnormal use, lightning (or other electrical discharge), exposure to moisture or dampness, excessive temperatures, spill of liquids or fluids, or acts of God. Repair, modification or service of RINEX products by any party other than an authorised RINEX dealer shall render this warranty null and void. RINEX does not warrant any Product where the Product serial number or nameplate has been removed, defaced or altered. RINEX does not warrant claims asserted after the end of the warranty period.

RINEX does not warrant or guarantee the precision or accuracy of positions obtained when using Products. The potential accuracy of Products as stated in RINEX literature and/or Product specifications serves to provide only an estimate of achievable accuracy based on:

- Specifications provided by the US Department of Defense for GPS Positioning,
- GPS OEM Receiver specifications of the appropriate manufacturer (if applicable),
- and
- DGPS service provider performance specifications.

RINEX reserves the right to modify Products without any obligation to notify, supply or install any improvements or alterations to existing Products.

No Other Warranties

The foregoing warranty is exclusive of all warranties, whether written, oral, implied or arising by statute, course of dealing or trade usage, in connection with the design, sale, installation, service or use of any products or any components thereof, including, but not limited to, any warranty of merchantability or fitness for a particular purpose.

Limitation of Liability

The extent of RINEX'S liability for damages of any nature to the end purchaser or any other person or entity whether in contract or tort and whether to persons or property shall in no case exceed, in the aggregate, the cost of correcting the defect in the Product or, at RINEX'S option, the cost of replacing the defective item. In no event will RINEX be liable for any loss of production, loss of profits, loss of use for any special, indirect, incidental, consequential or contingent damages, even if RINEX has been advised of the possibility of such damages.

Without limiting the foregoing, RINEX shall not be liable for any damages of any kind resulting from installation, use, quality, performance or accuracy of any products.

Governing Legislation

To the greatest extent possible, this warranty shall be governed by the laws of the State of Western Australia. In the event that any provision hereof is held to be invalid by a court of competent jurisdiction, such provision shall be severed from this warranty and the remaining provisions shall remain in full force and effect.

Obtaining Warranty Service

In order to obtain warranty service, the end purchaser must bring the Product to an authorised RINEX dealer along with the end purchaser's proof of purchase. The end purchaser must produce the original invoice or other purchase documents as proof of the purchase date.

The end purchaser is solely responsible for the cost of transportation of the Product to RINEX or an authorised RINEX dealer and the Product is at the end purchaser's risk whilst in transit.

For any questions regarding warranty service or to obtain information regarding the location of any of RINEX's approved dealers, contact RINEX at the following address:

RINEX Technology

19 Lyall Street

South Perth

Western Australia 6151

Telephone : (08) 9474 4771

Facsimile : (08) 9474 4772

Internet : www.RINEX.com.au

GuideTRAX V3

1	Introduction	2
1.1	This Manual.....	5
1.2	The Saturn Series	6
1.3	GuideTRAX V3.....	7
1.3.1	Saturn HL Version	7
1.3.2	Saturn HT Version.....	7
1.3.3	Saturn HR Version.....	8
2	Getting Started	10
2.1	Starting the System	13
2.2	The Startup Screens	14
2.3	The Main Screen	15
2.4	Map Screen.....	17
2.5	Virtual Road Window.....	18
2.6	Status Bar	20
2.7	GPS Status Indicator.....	22
2.7.1	GPS Status Window.....	23
2.8	Registering the System	25
2.9	Setting Up The First Time	26
2.9.1	Setting Up Vehicles.....	26
2.9.2	Setting Up The Boom	29
2.9.3	Setting Up Master and Section Switches	30
2.10	Connecting the GPS.....	32
2.11	Recording a Treatment.....	33
3	Vehicles & Booms.....	34
3.1	Configuring the vehicle.....	37
3.1.1	Tractor	37
3.1.2	Articulated Tractor	38
3.1.3	Self Propelled Sprayer.....	39
3.2	Configuring the towed implement.....	40
3.2.1	Pig Trailer	40
3.2.2	Dog Trailer.....	41
3.3	Configuring the Rig.....	42
3.3.1	Configuring the Boom Settings (Swath Width)	42
4	Fields & Virtual Memory	44
4.1	Virtual Memory	46
4.2	Starting a New Field	47
5	Using Guidance.....	48
5.1	Creating a Guideline.....	51

5.1.1	Parallel Guidance	52
5.1.2	Racetrack (Lock) Guidance	53
5.1.3	Contour Lines Method	55
5.2	Guidance information	57
5.2.1	Virtual Road Information	57
5.2.2	Lightbar	58
5.3	Guidelines and offsets	60
5.3.1	Guide Overlap	60
5.3.2	Guide Offset	61
6	Customising the System	62
6.1	Enabling Options By Password	64
6.2	GPS Configurations	65
6.2.1	Defaults	65
6.2.2	Changing the GPS Settings	65
6.2.3	Using e-Dif	67
6.3	Guidance Information	68
6.3.1	Heads Up/North Up	68
6.3.2	Zooming In and Out While Driving	69
6.3.3	Virtual Road	69
6.3.4	Lightbar	70
6.4	The Screen	72
6.4.1	Night Mode	72
6.4.2	Grid	72
6.4.3	Measurement Units	72
6.4.4	Position Units	72
6.4.5	Status Bar	73
6.5	Turning Treatment Recording ON and OFF	74
6.5.1	The RINEX Toggle Switch	74
6.5.2	Using Touch Instead Of a Switch	76
6.5.3	Connecting Directly to a Third Party Controller	76
6.6	The RINEX Button Box (Optional Extra)	77
6.7	The RINEX Foot Switch (Optional Extra)	78
6.8	The Multi Section Boom Interface (Optional Extra)	80
6.8.1	Installation	80
6.8.2	Enabling the MSBI	80
7	The Menu System	82
7.1	Menu Layout	85
7.2	The Main Menu	87
7.2.1	View	88
7.2.2	Field	89
7.2.3	Guide	92
7.3	General Setup	98
7.3.1	About GuideTRAX	102
7.3.2	Display Setup	104
7.3.3	Vehicle Setup	107

7.3.4	Guide Options.....	120
7.3.5	Lightbar Setup	122
7.3.6	Virtual Road Setup	124
7.3.7	GPS Setup.....	126
7.3.8	Remote Buttons.....	128
8	The Launcher.....	130
8.1	Opening the Launcher.....	133
8.2	Using the Launcher	135
8.2.1	Launcher Main Menu.....	136
8.2.2	System Tools.....	138
8.2.3	Utilities	140
8.2.4	GPS Tools	141
8.2.5	RINEX Tools.....	143
9	APPENDIX.....	146



1

Introduction

GPS guidance systems allow agricultural machinery to be far more productive by providing accurate and real time information for vehicle navigation and placement of product. Specifically the RINEX guidance system provides an easy to use interface through the colour touch screen for vehicle guidance. The system may be used for any agricultural task which requires vehicle navigation, particularly for applications or treatment of chemicals and/or fertilisers and seeds.

Treated areas can be seen on the screen as the vehicle is working, providing a continuous guidance display with additional information relating to the field and treatment. The RINEX guidance system records information until it is manually cleared so operations can be interrupted if necessary, and completed at a later date.

GuideTRAX V3 has been developed by RINEX primarily for vehicle guidance in agricultural applications. In addition to this GuideTRAX V3 can be configured for control of automated steering systems and/or automated boom section control.

GuideTRAX has evolved over many years and the release of GuideTRAX V3 software heralds a new era with the addition of field planning and data management modules to further enhance the guidance software.

GuideTRAX V3 is configured for three different user levels. The system, depending upon purchase is configured as either a HL, HT, or HR model. Each model is described in a separate manual.

Accordingly this manual is specifically designed to assist users of the Saturn guidance systems in the operational use of GuideTRAX V3 HL software.

1.1 This Manual

This manual is designed for use with the Saturn HL model guidance system as manufactured by RINEX.

This manual will refer to buttons which appear on the screen. The screen is touch sensitive, which means that the system is operated by touching the buttons on the screen. The user should touch the button on the screen with their finger to select the button.

This manual will adopt the following conventions when describing the selection of a button or a series of buttons in order to access a particular function or section of the program.

A button on the screen refers to icons or images that appear on the screen. An example of a button is shown in Figure 1-1.



Figure 1-1 The FIELD button

FIELD

Refers to the FIELD button as illustrated in Figure 1-1.

When it is necessary to locate a particular part of the V3 program by touching a number of buttons this will be referred to as “Access” and show the necessary buttons to touch in order to access the function starting from the Main Menu.

Access:

SETUP | ABOUT GUIDETRAX | REGISTER

1.2 The Saturn Series

RINEX manufacture a variety of guidance and control systems, including the Saturn series of guidance systems. The series has evolved over the years as development in computer technology has also evolved.

GuideTRAX V3 software was designed specifically to operate on the Saturn H series which incorporates an intelligent power supply with an embedded Windows® operating system. Specifications for the Saturn H series are provided in Appendix 2.

The Saturn H series guidance systems automatically control the power position according to the vehicle ignition status which means that the guidance system is operational when the vehicle is running and inactive (OFF) when the vehicle is shutdown.

1.3 GuideTRAX V3

GuideTRAX V3 is designed to provide one easy to use interface which can accommodate different user requirements as necessary. RINEX recognizes that many users want their systems to grow with their requirements, which is exactly how GuideTRAX V3 is designed to operate. GuideTRAX V3 is a modular system that has 3 main levels of operation which are all built on a common hardware platform. All GuideTRAX V3 systems can operate with any level and type of GPS positioning from RTK to a stand alone GPS. A user can purchase an entry level system that can be expanded in the future to accommodate more advanced data management features as well as the options of AutoSPRAY, AutoSTEER and FieldNET. The following sections describe the features and assets of each version of GuideTRAX V3

1.3.1 Saturn HL Version

The Saturn HL is designed as an entry level guidance system. The HL incorporates the same guidance functions as found on the higher level versions including parallel, racetrack and contour guidance and is built on the same common hardware platform. Furthermore it provides the same functionality for vehicle modelling as found in the other versions and still allows for many optional features to be added at a later date. The HL offers a large full colour touch panel screen with a moving map display, and has the most simple and intuitive operator interface on the market.

Primarily the HL is designed to allow users to purchase a fully featured guidance system which is economically priced and totally upgradeable for the future.

1.3.2 Saturn HT Version

The Saturn HT is designed for the user who requires an easy to use guidance system which can include the options of automated steering control and automated boom section control. The HT provides the user with the most advanced guidance functions provided on any system throughout the world. The user can choose and swap between Parallel, Lock or RePLAY guidance in any field with the touch of a button. The HT will allow the user to permanently save fields to memory, which can then be exported to an office program very simply, using a USB memory stick.

The HT can be configured with the optional modules of AutoSPRAY, AutoSTEER and FieldNET, most other RINEX peripherals can be added, or the HT can be upgraded to the Saturn HR.

1.3.3 Saturn HR Version

The Saturn HR is designed for the user who wants a complete guidance package but requires full record management functions and integration with farm mapping and QA programs. The HR is PLANCENTRIC which is a total system where season plans can be designed, transferred to the vehicle for application, record application data then export back to office programs for archiving. HR brings AutoFIELD recognition and a range of new features that allows important information to be recorded without any user involvement. The HR is the only system for complete data integration with PAM software or the supplied RINEX Office package. The HR can be configured with the optional modules of AutoSPRAY, AutoSTEER and FieldNET, making it the world's smartest guidance system.



2

Getting Started

GuideTRAX V3 operates on colour touch screen. Hence to access any function on the system it is a simple case of touching or tapping the screen on the appropriate button.

The RINEX screen is a 22cm (diagonal measurement), or an optional 27cm, which should be securely attached to the vehicle in accordance with the installation manual.

This section describes the correct way in which to power the system ON and OFF and the various parts of the screen that both displays and allows the user to enter information into the system. Understanding the terminology of the various parts of the screen is important as the manual refers to these parts when describing the functions of the guidance system.

This section also details how to correctly configure the Saturn H system prior to use for the first time.

It is recommended that all users, including users of earlier RINEX systems, read this section to familiarise themselves with the operation of GuideTRAX V3.

First time users of RINEX guidance systems are encouraged to read the entire manual to ensure that they are aware of the many features provided on the Saturn H system with GuideTRAX V3 software.

2.1 Starting the System

Prior to starting with this manual the guidance system should be completely installed into the vehicle in accordance with the instructions in the installation manual.

- 1) Turn the Isolation Power Switch (IPS) on the Interface Box to the ON position (-). This will not immediately power the system as the vehicle ignition must also be ON. See Figure 2-1 to locate the IPS.
- 2) With the IPS on the Interface Box in the ON position, start the vehicle and leave the engine running. The Saturn guidance system will start to power on after a short period.
- 3) Whilst the system is starting the screen will display information pertaining to the onboard computer system. This is the normal starting sequence and can be ignored. Once the system finishes loading GuideTRAX V3 the Main screen will be displayed and the system is ready for operation.



Figure 2-1 : The Saturn H interface box & Isolation Power Switch

In normal operation, leave the Isolation Power Switch (IPS) on the Interface Box in the ON position (-) at all times.

- 4) To shut the Saturn H system OFF turn the vehicle ignition off. This will power down the Saturn H system. The IPS should not be switched to the OFF position.

Hints and Tips:

- ◆ *There is no Exit button in GuideTRAX V3 (some earlier versions of GuideTRAX V3 did have an EXIT button). Do not turn the system off by turning the IPS to the OFF position on the interface box. Shutting down the system in this way may cause the loss of important system information.*
- ◆ *It is possible that the system will start to the Launcher menu and not GuideTRAX V3 Main Screen if the system was shutdown incorrectly. In this situation select the option **Start GuideTRAX** to move to the Main Screen.*

2.2 The Startup Screens

As the system is starting up, it will display the three screens shown in Figure 2-2 and Figure 2-3 below:



Figure 2-2: The RINEX First Startup Screen

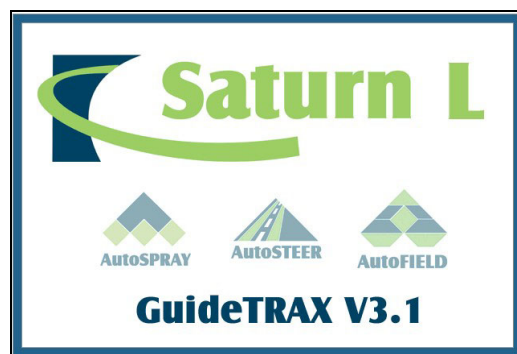


Figure 2-3: GuideTRAX V3.2 (HL) Startup Screen

The GuideTRAX startup screen displays the model (HL) and version (3.2) of software. It also shows that the AutoSPRAY, AutoSTEER and AutoFIELD options are **not** enabled on your system.

2.3 The Main Screen

The system will be ready for operation once the main screen, shown in Figure 2-4 is displayed. This is known as the Main screen and its functionality is described in detail in this manual.

The screen is touch sensitive, which means that the system is operated by touching the buttons on the screen. The user should touch the button on the screen with their finger to select the button.

Under no circumstances should any sharp implement be used to touch the screen or should excessive force be used when touching the screen.

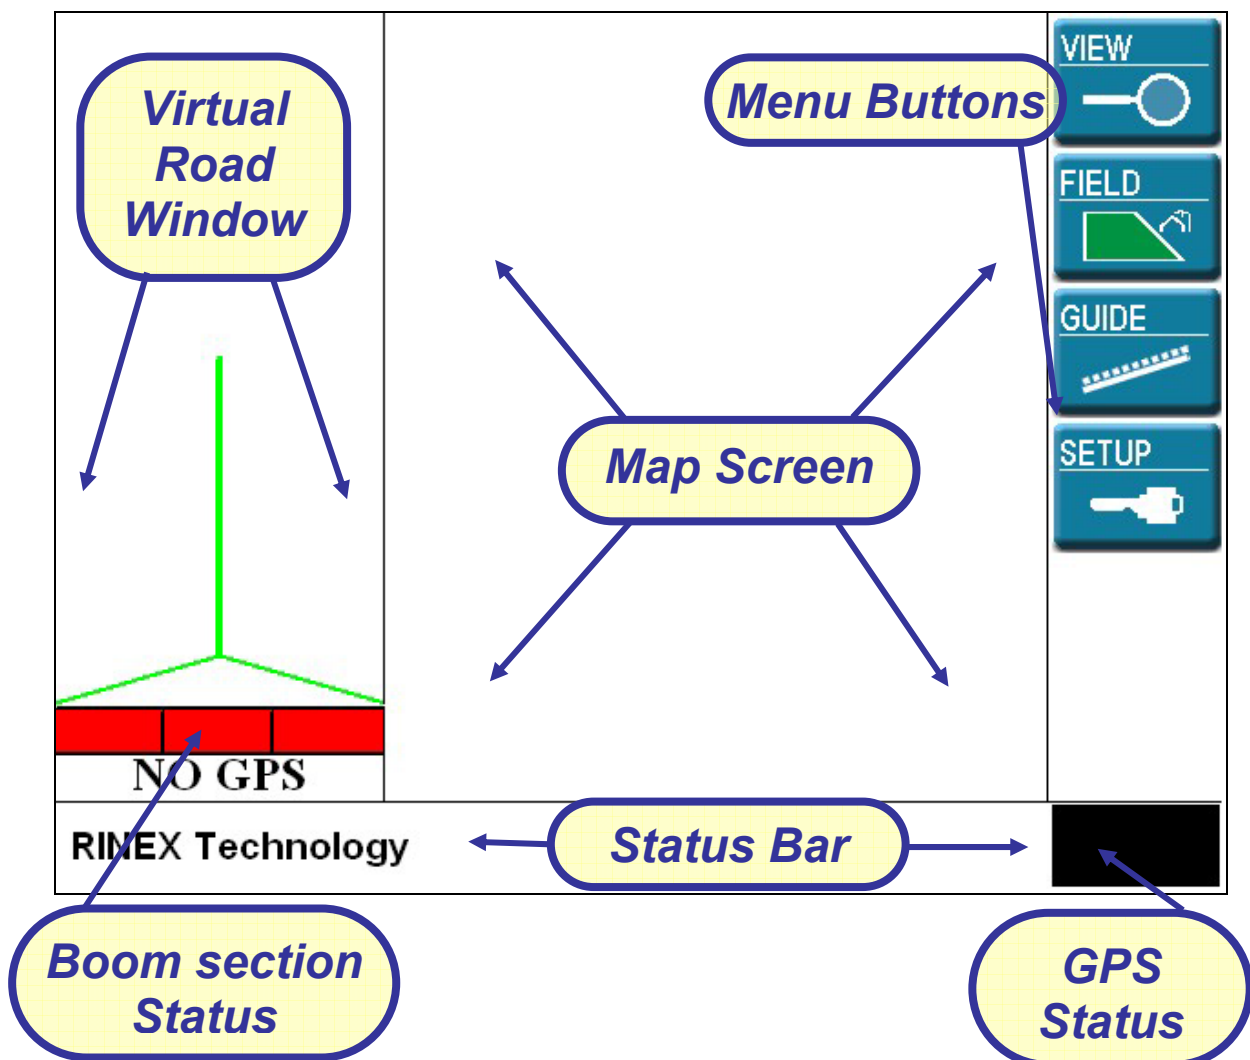


Figure 2-4: The Main Screen

Overview: The main screen displays the following information.

Item	Description
Map Screen	The Map Screen occupies the greater part of the overall screen and displays the treated area as a map view.
Virtual Road Window	The Virtual Road Window on the left hand side of the screen can be toggled ON or OFF. If guidance is not activated the screen will not display a Virtual Road.
Status Bar	The Status Bar is located at the bottom of the main screen. It can be toggled to display status information relating to the field and system.
GPS Status	The GPS Status Indicator is used to display the current GPS status. A visual alarm will be displayed if the GPS does not conform with the setup parameters.
Menu Buttons	The Menu Buttons are displayed on the right hand side of the screen. The buttons will change as sub-menus are selected for operation.
Boom Section Status	The Boom Section Status displays the ON / OFF status of one or more boom sections dependant upon the configuration of the system.

Hints and Tips:

- ◆ *The Main Screen may vary dependant upon the options configured on the system.*

2.4 Map Screen

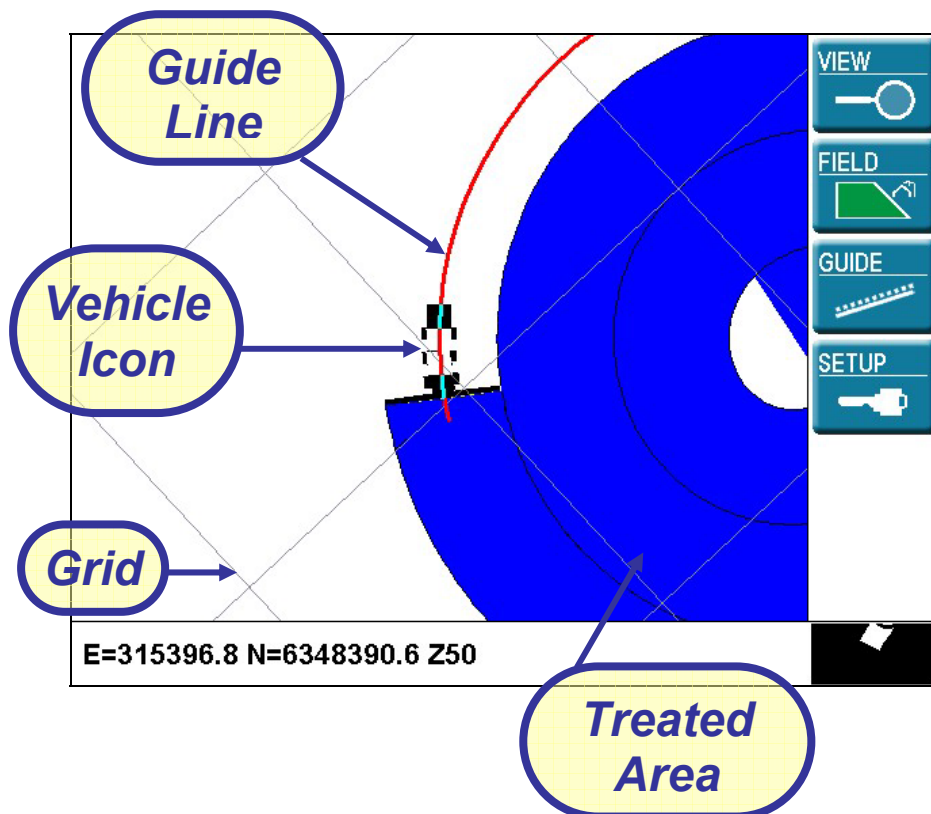


Figure 2-5: A typical Map Screen

Overview: The Map screen displays the following components:

Item	Description
Vehicle Icon	The Vehicle Icon represents the position of the rig in relationship to the treated areas. The Vehicle Icon will show all links that make up the current rig.
Guideline	A guideline will be displayed when either Lock or Parallel guidance is activated. The guideline is represented by a solid red line on the Map Screen that is used to guide the vehicle around the field.
Treated Area	When treatment is on, the treated area is recorded. This is then displayed on the Map Screen and is represented as the blue shaded area on the screen.
Grid	When the grid is on, grid lines will be displayed on the Map Screen. The grid lines run in a north-south, east-west direction.

2.5 Virtual Road Window

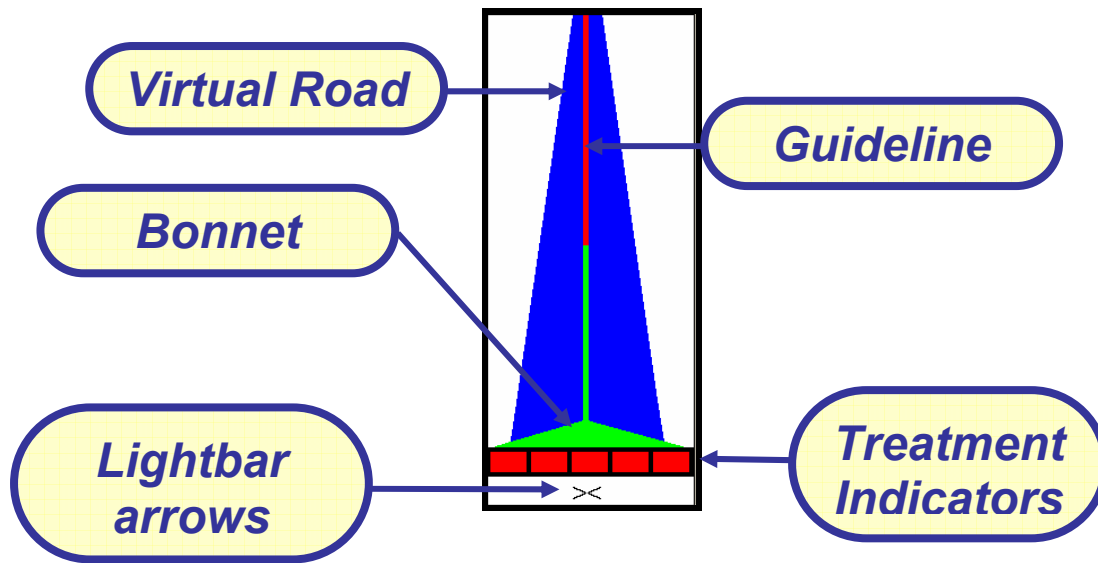


Figure 2-6: A typical Virtual Road Window

Overview: The Virtual Road Window is designed to represent a road from the position of driver looking across the bonnet to the guideline.

Item	Description
Virtual Road	The Virtual Road is represented by the blue roadway in the window. The Virtual Road does not represent the actual swath width of the boom, but rather the central portion of the swath.
Guideline	The guideline is represented by the red line in the centre of the blue Virtual Road.
Vehicle Bonnet	The green triangle in the Virtual Road window represents the front bonnet of a vehicle. The elongated line from the bonnet shows the vehicle alignment in relationship to the guideline. When the triangle is filled solid green it indicates that treatment recording is ON.
Treatment Indicators	The treatment indicator displays the number and current status of sections on a boom. A box filled red indicates that the section is ON, a blank box (white) indicates the section is OFF.

Item	Description
Lightbar Arrows	The lightbar arrows are displayed below the treatment indicators once guidance has been activated. The lightbar arrows indicate the distance from the vehicle to the guideline.
Grid	A grid will be displayed in the Virtual Road Window.

2.6 Status Bar







Overview: The Status Bar displays system status information as shown below. These messages can be set to be visible or invisible – see Section 6.4.5.

Item	Description
Position	<div>S 32°36'09.81" E 138°18'05.23"</div> <p>This displays the current position of the vehicle.</p>
Area	<div>AREA: 12.2Ha of 227.6Ha</div> <p>This displays the current treated area. When one lap of the paddock has been completed, the total encompassed area will also be shown.</p>
Area To Go	<div>AREA: 215.4Ha to go</div> <p>This displays the total area minus the treated area.</p>
Field / Vehicle	<div>M3,30.0m</div> <p>This displays the number of the selected memory slot and the implement swath width.</p>
Speed	<div>15.4 km/h</div> <p>This displays the current vehicle speed.</p>
% Overlap	<div>Covered Area = 0.0 HA, Overlap = 0.0 HA (0.0 %)</div> <p>This displays the area covered and percentage of overlapped area in the current field. The covered area + overlap area approximately equals the treated area.</p>

Item	Description
Guide Status	<div data-bbox="679 315 1275 396" data-label="Text"> <p>7L</p> </div> <p>This displays how many guidelines the vehicle is from the original guideline, and also whether the current guideline is to the left or right of the original guideline (or AB points).</p>
Controller Info	<div data-bbox="679 622 1275 703" data-label="Text"> <p>Manual: 0.000L/HA</p> </div> <p>This displays information from a Third Party Controller if connected. If using touch or a RINEX toggle switch then it displays Manual.</p>

2.7 GPS Status Indicator

Overview: The GPS Status Indicator displays the current status of the GPS or alarms. The indicator also selects the GPS Info window for additional GPS information. The states of the GPS Status Indicator are listed in the table below:

Icon	Description
	The satellite symbol scrolling through the icon indicates good GPS.
	The DØ alarm indicates good GPS, however the GPS is not corrected in any way (GPS only).
	The ØG alarm indicates poor GPS which is differentially corrected.
	The DØG alarm indicates no GPS.
	A totally blank GPS Status indicates that no data is being received at the GPS port.
	The View Mode indicates that GPS data is not used. The system will be in View Mode when the Field Menu is accessed.

2.7.1 GPS Status Window

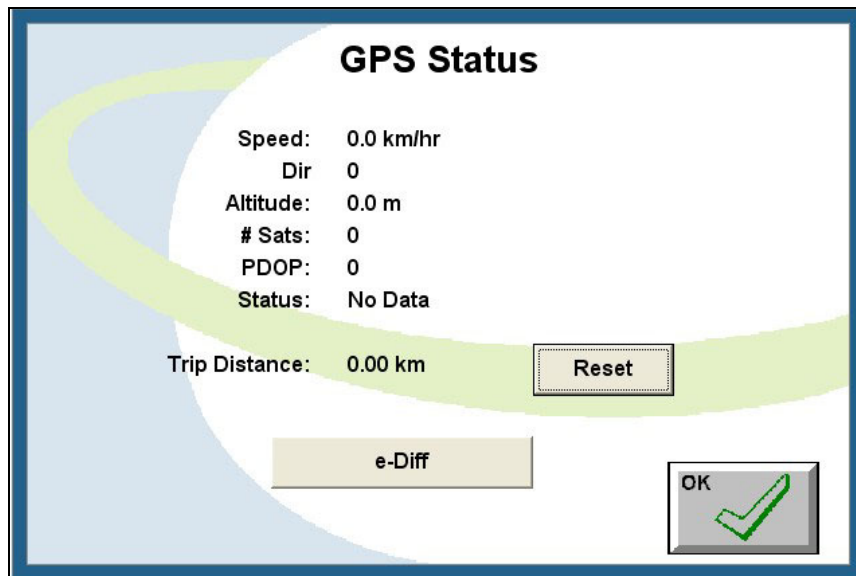


Figure 2-7: The GPS Info Window

Overview: The GPS STATUS window displays information related to the GPS. It displays information computed from the GPS.

Name	Function
GPS INFO	<p>The GPS information displayed is detailed as;</p> <ul style="list-style-type: none"> • Speed: The current vehicle speed. • Dir: The current vehicle direction displayed as an azimuth (angle relative to North). • PDOP: The PDOP (Position Dilution of Precision) is a measure of the positioning quality. The PDOP value should be less than 4 for accurate positioning. • Altitude: The altitude of the vehicle above sea level. • # Sats: The number of GPS satellites observed. • Status: Displays the current GPS status, also indicated by the GPS Status Icon.
Trip Distance	The trip distance is an odometer as recorded by GPS.
Reset	The Reset button resets the trip distance back to 0.00Km.

Name	Function
e-Dif	The e-Dif button (optional purchase) turns differential mode off and swaps the MiniMAX receiver from marine beacon to e-Dif mode and calibrates it.
OK	The OK button closes the GPS Status window.

2.8 Registering the System

The Saturn H guidance system is configured for specific user requirements via a password. Hence prior to use the system must be configured with the correct code to register the options on the system.

The system has been supplied from RINEX with a password in accordance with the options ordered at time of purchase.

The six character code must be entered in the REGISTER window.

Access: **SETUP** **ABOUT GUIDETRAX** **REGISTER**

The password will be supplied with the following information;

- Serial number of the Saturn H interface controller unit
- Compact Flash Identification Number (CFID)

If the supplied information does not match the CFID, contact RINEX or their Authorised dealer as the password will not function.

2.9 Setting Up The First Time

The following list of settings must be set for correct guidance and mapping prior to using GuideTRAX V3. These parameters must be set each time the system is moved between vehicles. Failure to set these parameters correctly may provide incorrect guidance and mapping information.

2.9.1 Setting Up Vehicles

Prior to using the Saturn H system for the first time it is necessary to setup information pertaining to the vehicle and peripherals including the boom and its sections.

It is important that each link is created in the correct order. E.g., if the full rig will consist of a tractor towing a tank followed by a boom, then the first link to be set up must be the tractor, the second link must be the tank and the third link must be the boom.

Access: **SETUP** **VEHICLE** **LINK SETUP**

The default Link Setup list screen will be displayed as shown in Figure 2-8:


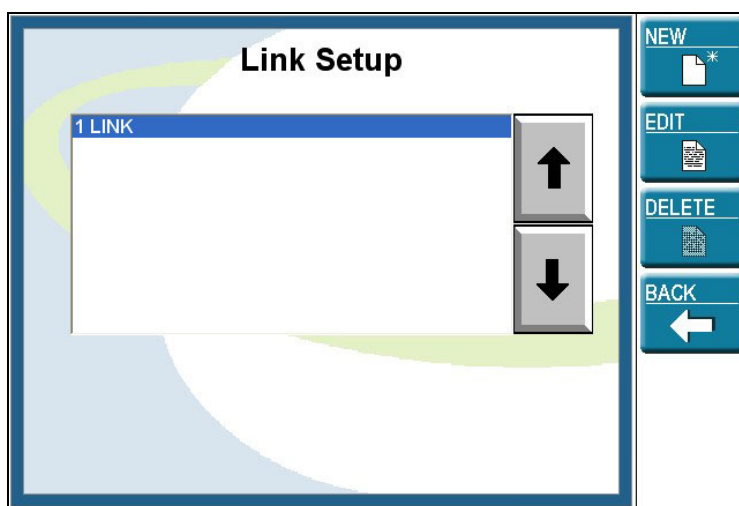


Figure 2-8: Default Link Setup Screen

- 1) Select '1 LINK' in the list and press **EDIT**. Type in the new link name (usually the tractor or implement model) using the on-screen keyboard and touch **NEXT**

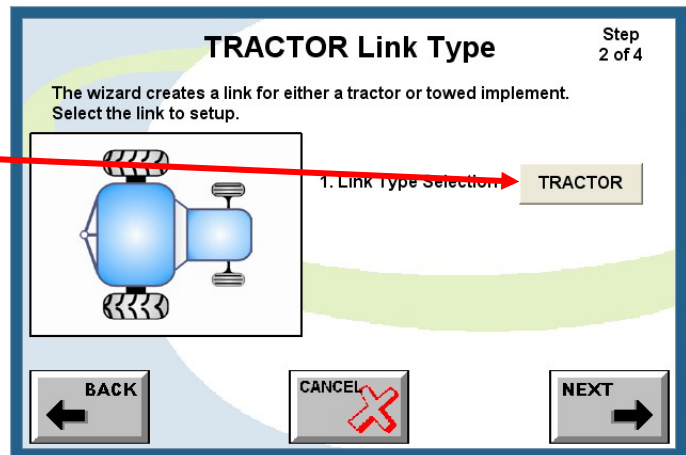- 2) Select whether this link is a Tractor, Articulated Tractor or Implement by touching the **TRACTOR** button.



- 3) Touch **NEXT**

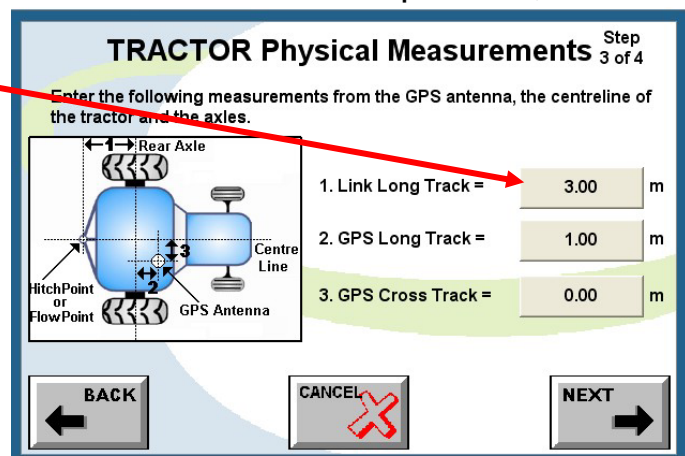
Hints and Tips:

- ◆ The vehicle or machine which has the GPS receiver/antenna installed on it must always be set as the TRACTOR (or ARTICULATED).

- 4) For each of the Physical Measurements shown on the screen measure corresponding distances on the tractor or implement, and touch the corresponding button on the screen


- 5) Type in the measurement using the on-screen keyboard, then touch **OK**

- 6) When all the measurements for this window have been entered touch **NEXT**



- 7) For each of the Screen Icon measurements shown on the screen measure corresponding distances on the tractor or implement, and touch the corresponding button on the screen.

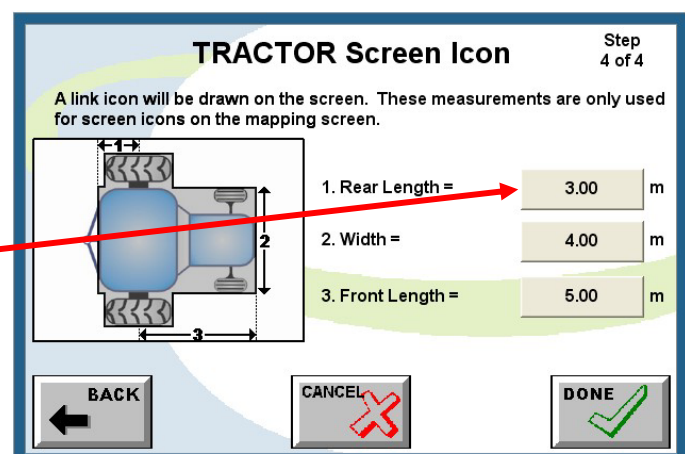- 8) Type in the measurement using the on-screen keyboard, then touch **OK**



- 9) When all the measurements for this window have been entered touch **DONE**
- 10) If another link needs to be created, touch **NEW** and repeat steps 1 to 9 for as many links (tractors or towed implements) as necessary

Hints and Tips:

- ◆ When completed, each link should appear in the list in the order in which the rig will be assembled, as shown in the example in Figure 2-9. Note that each link has a number showing the order in which it was entered at the left.
- ◆ If a link was entered in the wrong order, then use the Edit and Delete buttons to correct the error.


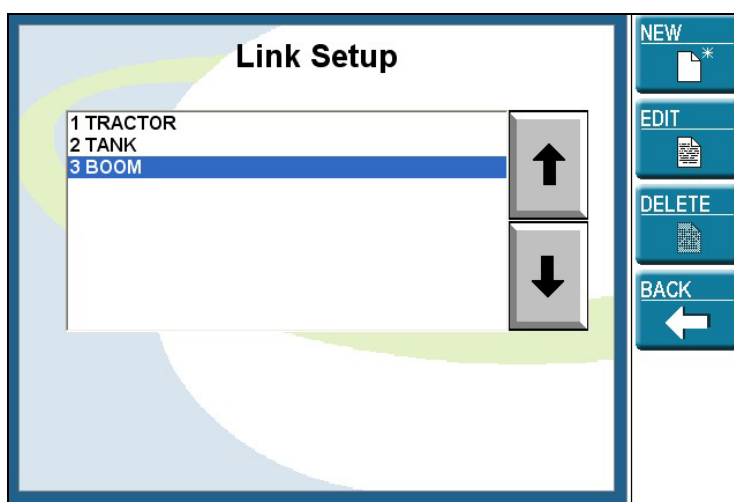


Figure 2-9: Link Setup List In Order Of Rig Assembly

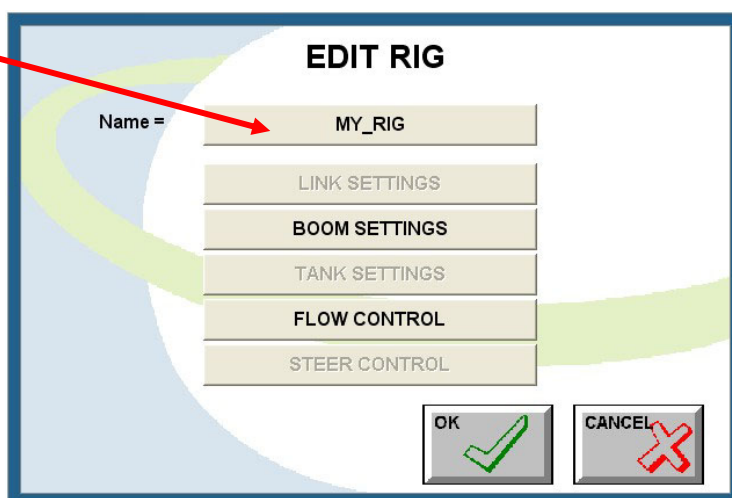
- 11) Touch **BACK** and then touch the **RIG SETUP** button.



- 12) Touch the "Name =" button and enter the name of the rig (usually something which will represent the function of the rig, e.g. "Sprayer") then touch **OK**.




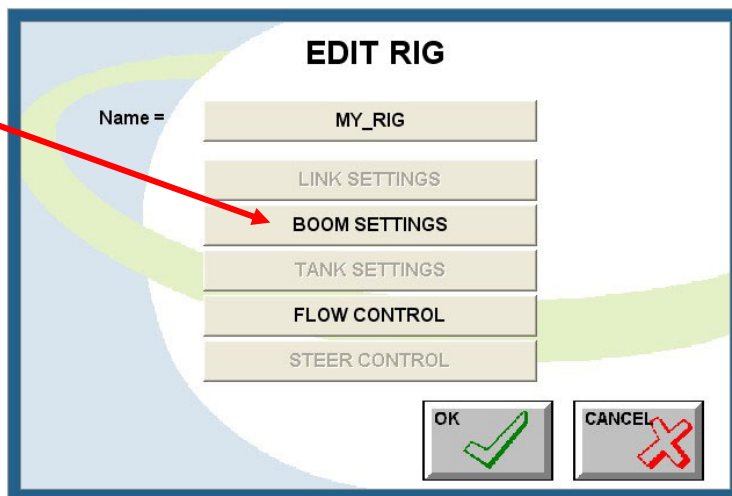2.9.2 Setting Up The Boom

- 1) Touch the **BOOM SETTINGS** button.



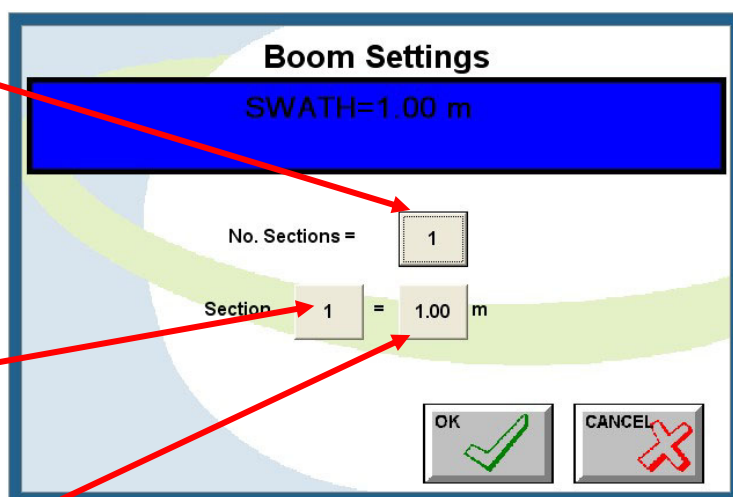- 2) Touch the No. Sections button
- 3) Use the  and  buttons to select the total number of sections that will be used on the boom, then touch **OK**.



- 4) Touch the Section button to select each section.
- 5) Touch the section width button to set the width of each section.
- 6) Use the on-screen keyboard to type in the width of the selected section and touch **OK**.
- 7) Repeat steps 4 and 5 until all section widths have been set. The total swath width is displayed at the top of the screen.

Hints and Tips:

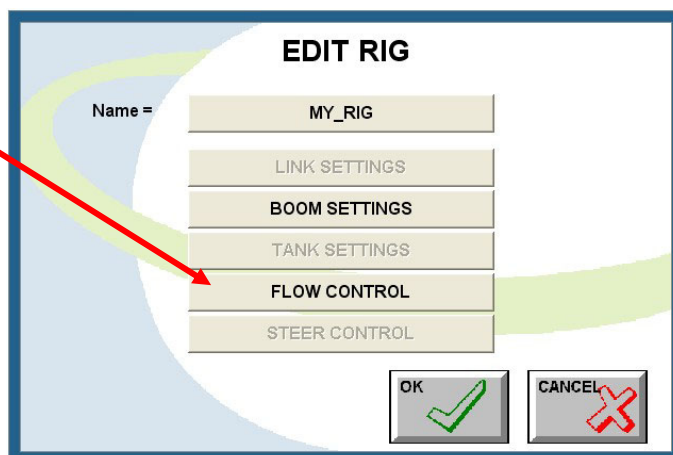
- ◆ If you do not have a Multi-Section Boom Interface (see Section 6.8) or any spray controller listed in the Flow Controller list, then you may find it more convenient to set the number of sections to 1 and treat the whole boom as just one large section.

- 8) Touch **OK** when boom settings are complete.

2.9.3 Setting Up Master and Section Switches


1) Touch the



FLOW CONTROL
button.



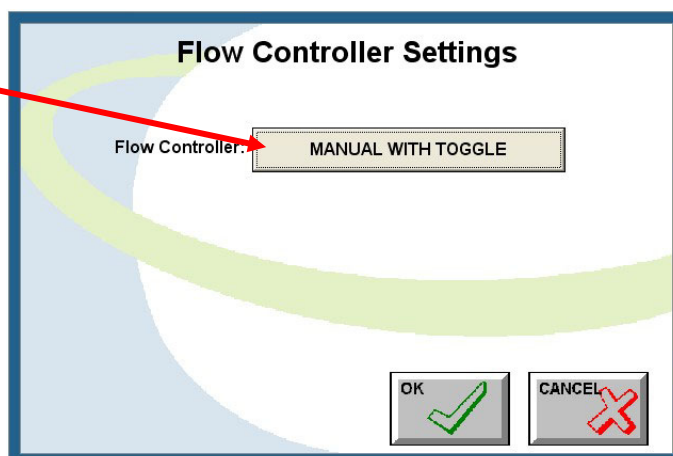2) Touch the

Flow Controller
button.



3) Using the   buttons to select the rate controller or method which will be used for turning treatment recording on and off.

4) Touch **ACCEPT**

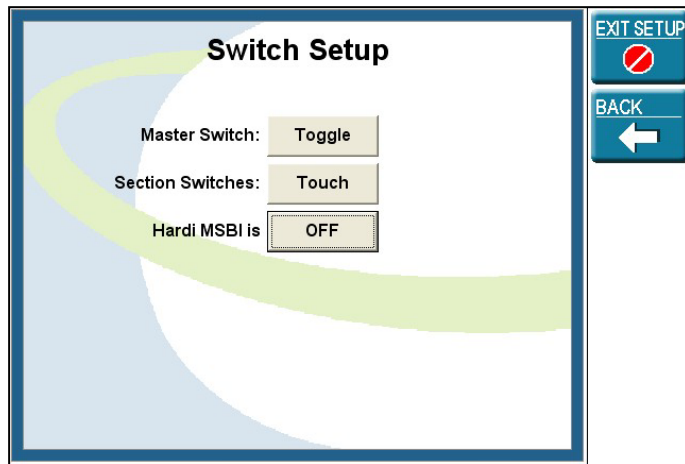
5) Touch **OK OK**

Hints and Tips:

- ◆ If using the Rinex toggle switch to turn recording on/off, select **MANUAL WITH TOGGLE**.
- ◆ Only select a flow controller if the Saturn H system is physically connected to the controller with a serial cable

6) Touch the **SWITCH SETUP** button.

7) Set Master Switch to the method that will be used for turning treatment recording on/off (Touch if touching the screen or Toggle if using the Rinex toggle switch). See Section 6.5 for more information



8) If the Saturn H system is connected to an external controller and section sensing is supported then set the Section Switches to External, if the intention is to touch the screen to turn the section recording on and off, then set the Section Switches to Touch.

9) Touch **EXIT SETUP**

2.10 Connecting the GPS

While GuideTRAX V3 is starting, the attached GPS receiver may need some time before becoming fully operational. If the system is new it is most likely that the GPS has not been powered up since initial factory testing. Hence the GPS Status indicator may show a warning, or an alarm message while the GPS receiver gathers new information about the visible satellites.

While this process is occurring the GPS Status Indicator, located in the lower right hand corner of the main screen and illustrated in Figure 2-10 may show an alarm status (See Section 2.7.1 for more details). When the GPS Status Icon changes to the scrolling satellite, the receiver is ready for normal operation.



Figure 2-10: The GPS Status Indicator with Satellite Icon

2.11 Recording a Treatment

GuideTRAX V3 is designed to record information when the vehicle is operational, such as when a boom spray is actually spraying chemical or a spinner spreader is spreading fertiliser. This manual refers to this operation as a treatment, however it is sometimes also referred to as a coverage area in other publications.

In order to record when a treatment is being applied or when the vehicle is in transit it is necessary to switch between the recording and transiting mode.

The Saturn H system can be configured to start and stop recording via three different methods:

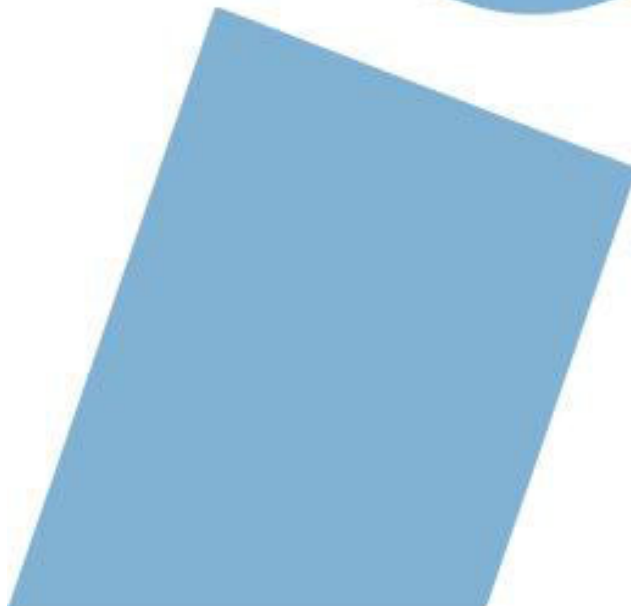
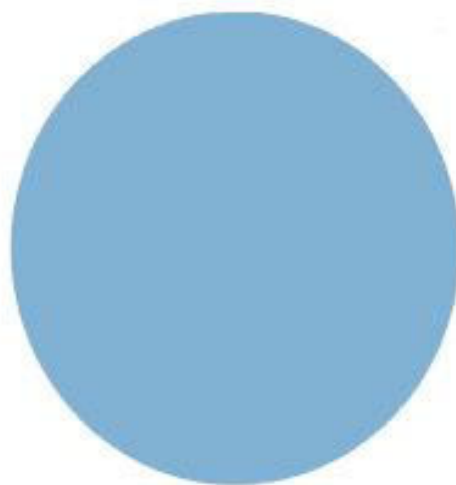
- **SCREEN** The screen can be used as the switch by touching either the bonnet on the Virtual Road Window or the Vehicle Icon on the Map Screen. Touching either of these points will then reverse the action.
- **TOGGLE** The RINEX Toggle switch is connected to the Saturn H interface controller and the switch can be turned ON or OFF. Additionally the RINEX Toggle can be wired to peripheral devices which supply a 12vDC switch when the treatment is ON (eg. a spray rate controller solenoid), see Section 6.5.1 for further details.
- **EXTERNAL** The Saturn H system is compatible with a number of peripheral controllers which communicate with the interface controller via a computer protocol. To confirm controller compatibility check Table 7-1 in Section 7.3.3.2.

To start and stop recording use the method that has been setup in Section 2.9.3 Setting Up Master and Section Switches.



3

Vehicles & Booms



GuideTRAX V3 software incorporates advanced vehicle modelling software to ensure that the recorded treatment areas are truly correct. It is particularly relevant as further advances in GPS accuracy become available and automatic control of treatment application is adopted.

GuideTRAX V3 can accurately model a spray boom or any implement which is towed by a tractor. In order to perform these calculations it is imperative that the measurements of the vehicle and GPS antenna are accurately recorded.

GuideTRAX V3 is designed to allow numerous plant and equipment used on the farm to be entered into the database for selection of a rig that may be used for seeding, spraying or any operation where the guidance system is used.

Link: Each item of plant and equipment is a different link (a tractor, truck, tank and boom are all individual links).

Rig: Each rig is made up of one or more links selected from a list, up to a maximum of five. This concept is illustrated in Figure 3-1 which shows three links to assemble one rig.

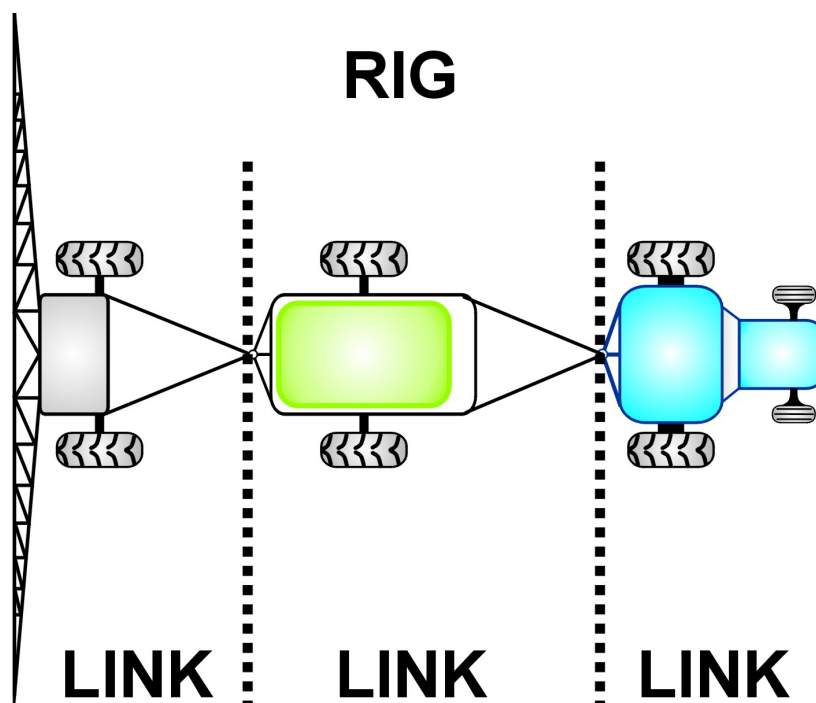


Figure 3-1: Rigs and Links

3.1 Configuring the vehicle

Access: **SETUP VEHICLE SETUP LINK SETUP**

The first link that will be used in the assembly of a rig will be the vehicle. The vehicle may comprise several different types including, a conventional tractor, truck, an articulated tractor, or a self propelled boom spray.

The different characteristics specific to individual vehicles including a tractor, articulated tractor or implement are described in the following sections.

3.1.1 Tractor

The term "vehicle" is used generally in this manual to describe the link at the front of a rig. The vehicle may be either a tractor, truck or any other vehicle which is used for towing other plant or for applying treatment. In GuideTRAX V3, the TRACTOR is defined as the vehicle which has the GPS receiver/antenna mounted on it.

The measurements for the vehicle are illustrated in Figure 3-2. The measurements from the GPS antenna to the centreline of the axles, vehicle, and the hitch point will need to be recorded and entered into GuideTRAX V3.

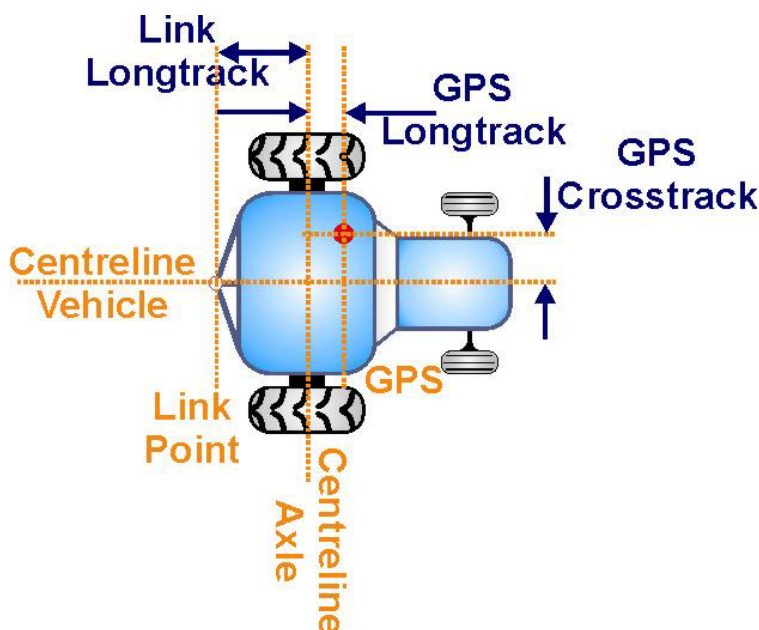


Figure 3-2: Tractor & Measurements

3.1.2 Articulated Tractor

The articulated tractor is a combination of two links. In order to enter the details of an articulated tractor it will be necessary to enter the measurements as indicated in Figure 3-3.

The GPS receiver/antenna must be mounted on the front half of the tractor and ARTICULATED selected as the Link Type in the Link Setup Wizard. The Wizard will create two links, with the first half as the first link in the rig, and the second half will be created as the second link in the rig.

Note that the GPS Longtrack measurement must be entered as a negative value if it is behind the front axle as shown in Figure 3-3.

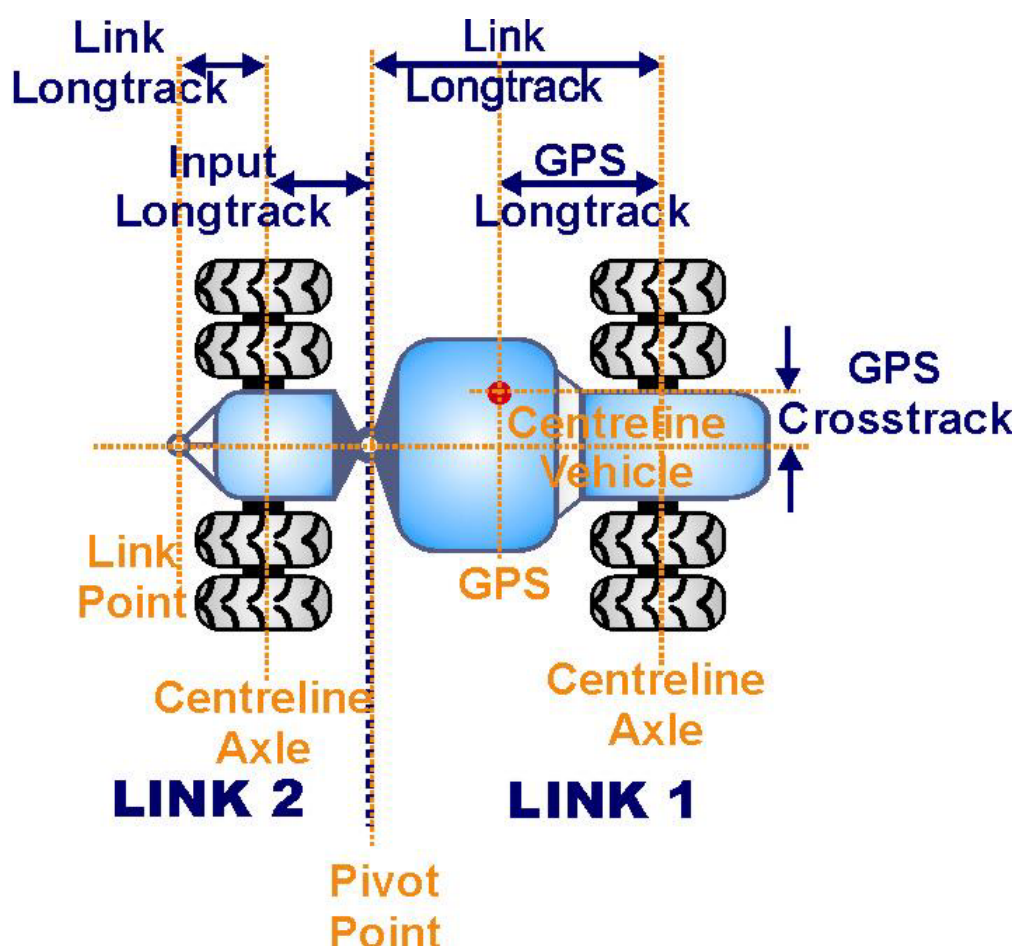


Figure 3-3: Articulated Tractor

3.1.3 Self Propelled Sprayer

The self propelled sprayer is treated as one link with the boom spray attached at the pivot point. In addition, self propelled sprayers may also have the boom attached to the front of the vehicle. In this situation the Link Longtrack measurement to the boom will be a negative value. These measurements are illustrated in Figure 3-4.

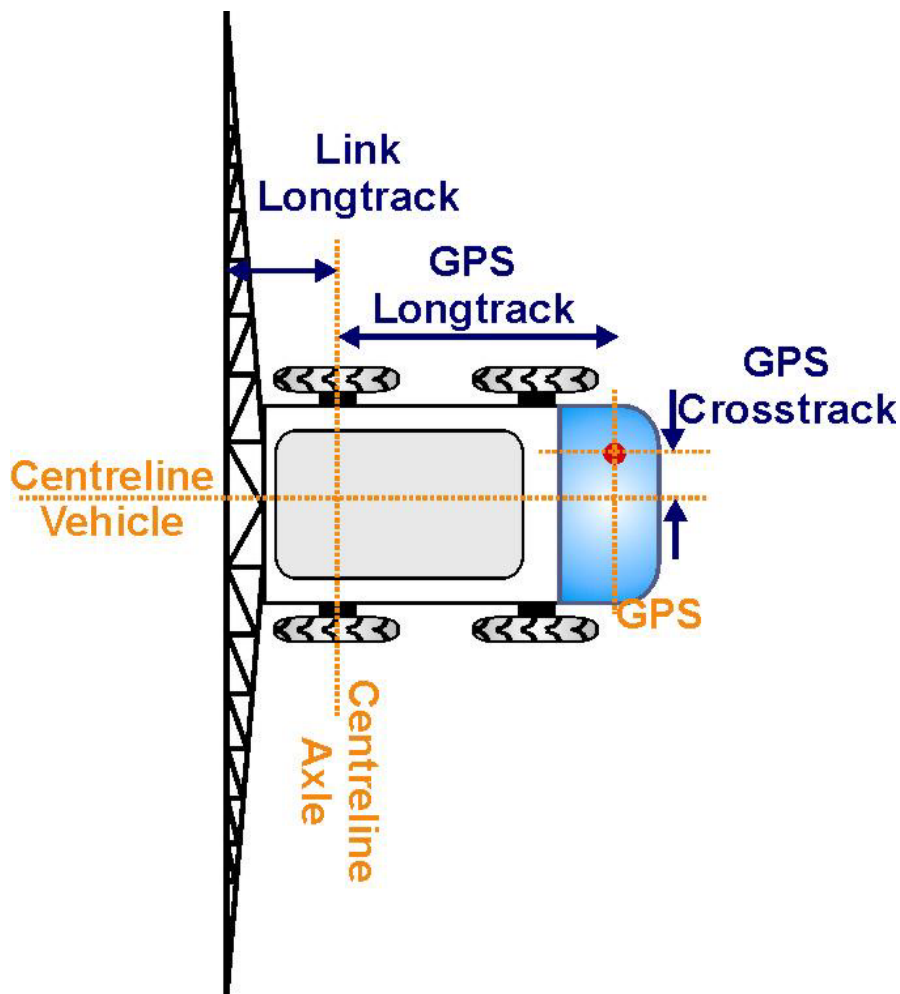


Figure 3-4 Self Propelled Sprayer

3.2 Configuring the towed implement

Access: **SETUP VEHICLE SETUP LINK SETUP**

The second or trailed link in a rig is typically of one or two varieties. Commonly referred to as a Pig or a Dog trailer, their characteristics and measurements are detailed below.

3.2.1 Pig Trailer

The Pig or the conventional trailer is very simple to model. The trailer may have one or more fixed axles which are all located at the rear of the trailer. This is illustrated in Figure 3-5.

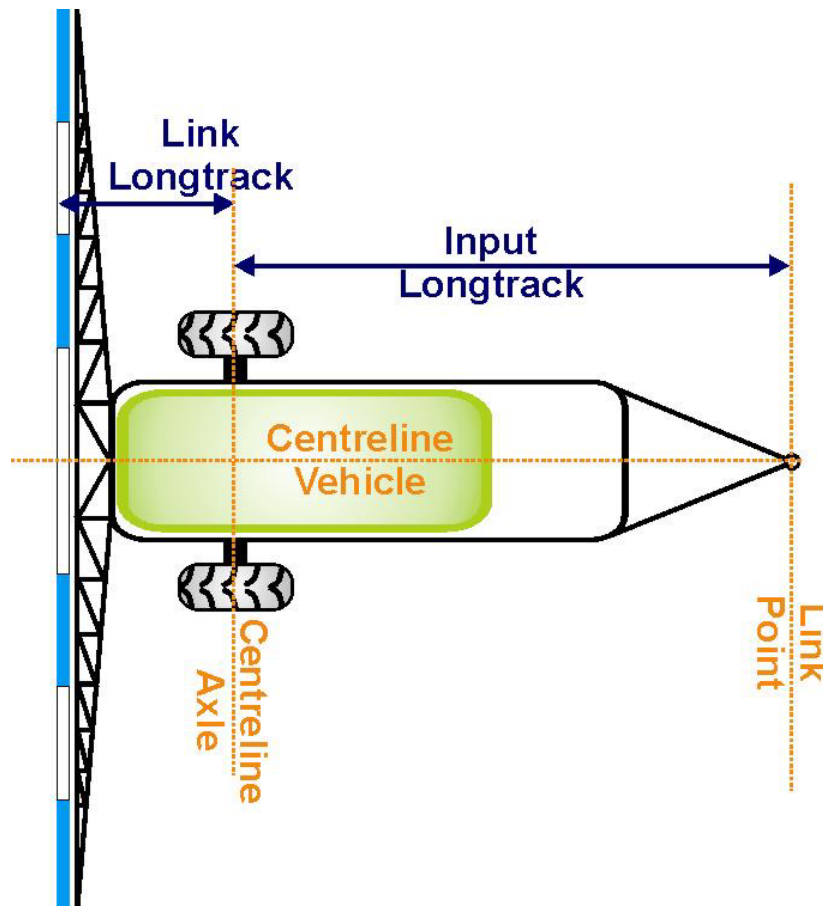


Figure 3-5: Conventional Trailer

If the trailer has a group of axles (e.g. two fixed axles at the back), then the Link Longtrack measurement must be measured from the centre of the group of axles to the rear flowpoint or hitch point.

3.2.2 Dog Trailer

The Dog trailer is similar in concept to the articulated tractor as it comprises two links. The trailer has at least two axles with the leading axle being mounted on a turntable as illustrated in Figure 3-6.

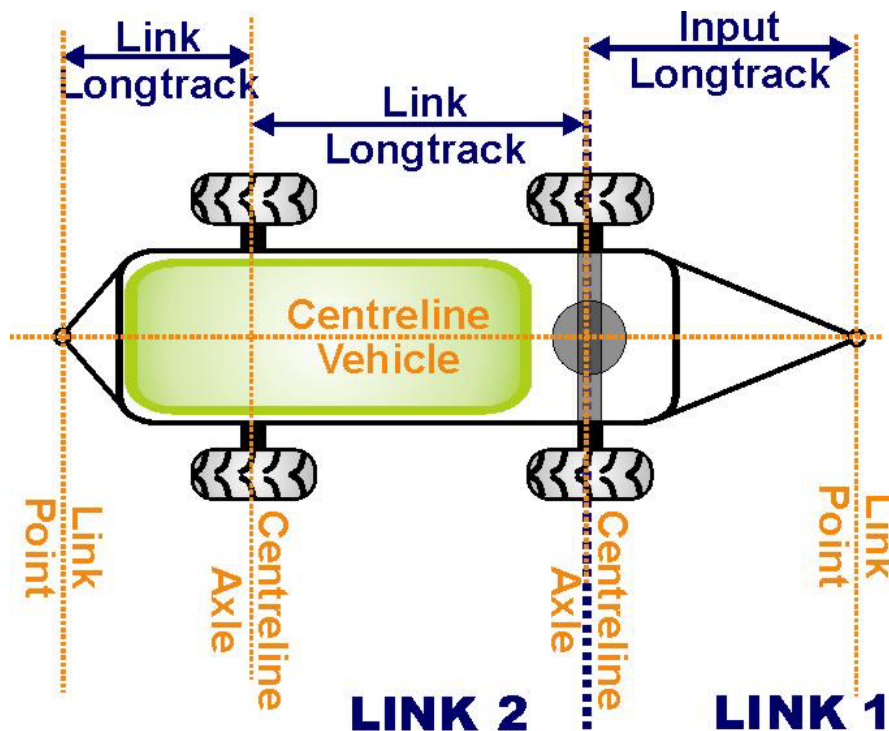


Figure 3-6: Dog Trailer Layout

When entering information for the two links the front section of the trailer must be entered as the first of the two links that make up the rig. The front section of the trailer will have an Link Longtrack measurement of 0.0 metres.

If the trailer has a group of axles (e.g. two fixed axles at the back), then the Link Longtrack measurement must be measured from the centre of the group of axles to the rear flowpoint or hitch point.

3.3 Configuring the Rig

Access: **SETUP** **VEHICLE SETUP** **RIG SETUP**

The Rig comprises one or more links. The Rig also defines the boom or swath width, the tank capacity, the flow controller and steering controller used in the makeup of the Rig.

3.3.1 Configuring the Boom Settings (Swath Width)

Access: **SETUP** **VEHICLE SETUP** **RIG SETUP**
BOOM SETTINGS

The swath width of the rig represents the actual width of the treatment applied. Hence the swath width may represent the width as applied from a spreader, or may apply to the width of a spray boom.

When a spray boom is used the boom settings may be divided into sections to represent the actual boom spray. The boom settings, the number of sections and their respective widths may be configured in the Edit Rig Window.



4

Fields & Virtual Memory

4.1 Virtual Memory

GuideTRAX V3 automatically saves field information whilst the system is operational. This information is saved in the onboard Virtual Memory. The Virtual Memory will retain the information on the treatment area until such time that it is cleared from the Virtual Memory. Furthermore the information is retained regardless of whether the system has been shutdown or not. Accordingly a field can be left unfinished and completed at a later date by using the Virtual Memory.

Access: **FIELD MEMORY**

There are nine Virtual Memory slots in all models of GuideTRAX V3, as illustrated in Figure 4-1. As treatment is recorded, the information is saved in the selected Virtual Memory slot. It will stay in the selected slot until the field is restarted.

Each of the nine Virtual Memory slots can be occupied by unfinished treatment data at any one time.

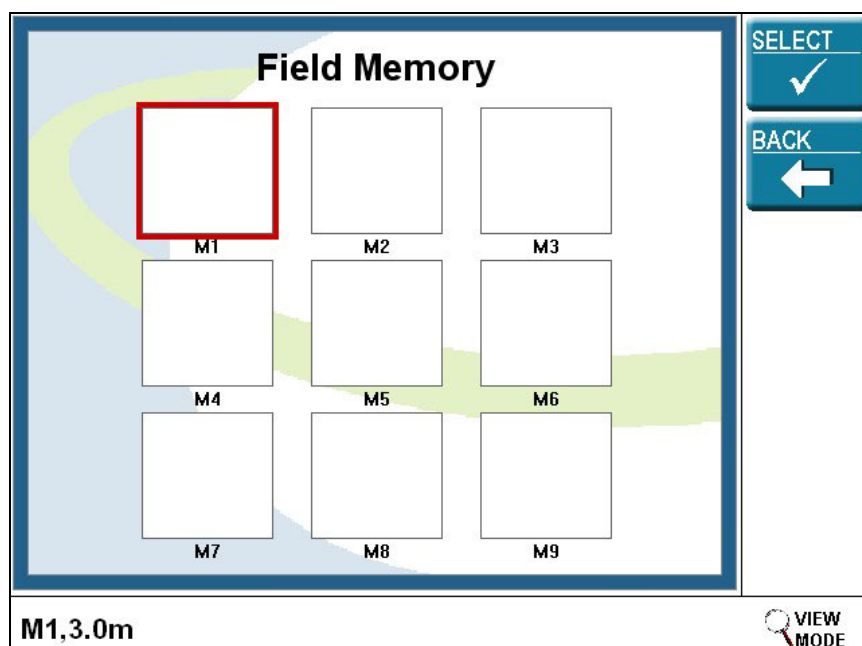


Figure 4-1: Field Memory Window

4.2 Starting a New Field

- 1) When a new treatment is being started in a field, a Virtual Memory slot must first be selected – touch **FIELD MEMORY**
- 2) Select any empty Virtual Memory slot, or, if none are empty, choose one which is no longer required.
- 3) If the Virtual Memory slot has a thick red line around it as shown around M2 in Figure 4-2, then it has been selected.
- 4) Touch **SELECT RESTART OK**. This will clear any previous treatment data from the selected Virtual Memory slot and set the boom width to the current vehicle.
- 5) Treatment can now be started.

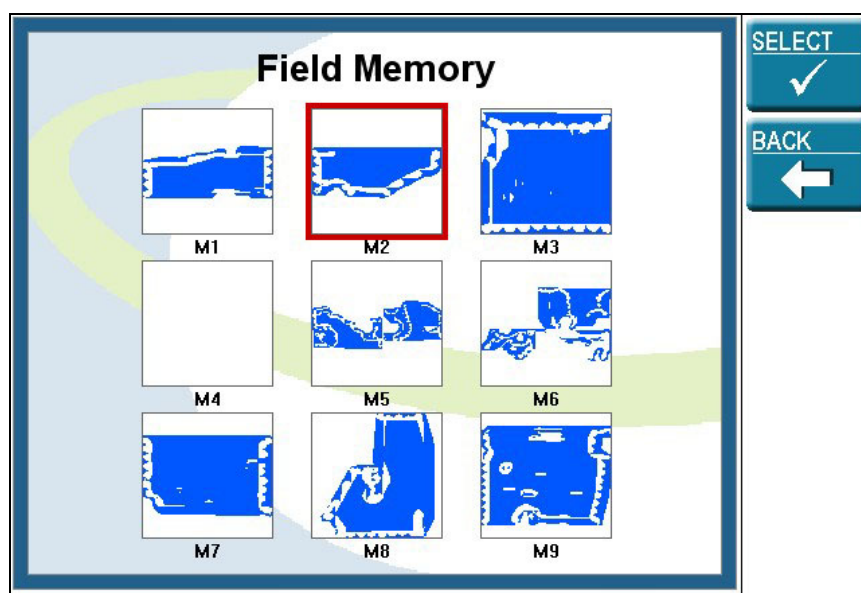


Figure 4-2: Field Memory Window

Hints and Tips:

- ◆ *If the boom has only one section, the swath width can be changed in the Restart Field window if required.*



5


Using Guidance



A major feature of GuideTRAX V3 is the ability to provide guidance to the vehicle operator so that treatment can be applied to a field as accurately as possible. In order to treat an entire field the operator will want to ensure that no areas are missed and minimise over lapping areas. Due to the never-ending shapes of fields a number of different spraying techniques have been developed.

These techniques, as shown in Figure 5-1 are summarised as follows.

- ◆ **Parallel lines** Perfectly straight lines that are parallel to each other.
- ◆ **Racetrack** Lines that are in an ever decreasing shape. The pattern is not necessarily a square or circle.
- ◆ **Contour lines** Lines that are parallel, however they are not straight. These lines are typically found around contour banks.

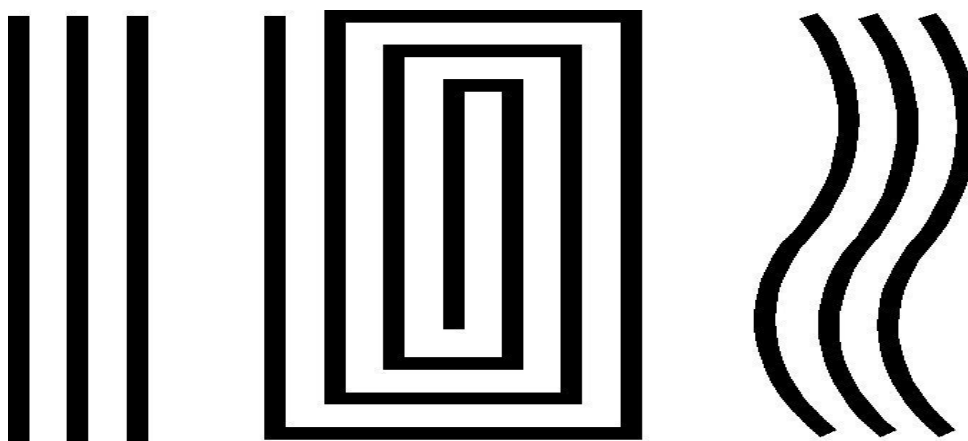

**Figure 5-1: Typical patterns used in treating fields
Parallel Lines, Racetrack and Contour lines.**

It is not the intention of GuideTRAX V3 to decide which method is superior as each operator has their own preferences as to which method they use for a given field. More importantly, it should be noted that the operator could use any of these techniques, or a combination, for guidance in applying a treatment to a field.

5.1 Creating a Guideline

A basic principle of GPS guidance is to create a guideline for the system and operator to follow. The guideline maybe straight or curved depending upon user requirements. Once created the guideline is represented on the map screen as a red line.

In order to create a guideline there are two basic principles to consider. Firstly for straight parallel lines it is necessary to define two points and the guideline is created between these points as shown in Figure 5-2.



Figure 5-2: Guideline with Points A and B

Alternatively a guideline can be created to follow alongside an existing treated area which maybe curved or straight. The guideline is created one swath width away from the existing treatment. This is shown in Figure 5-3.

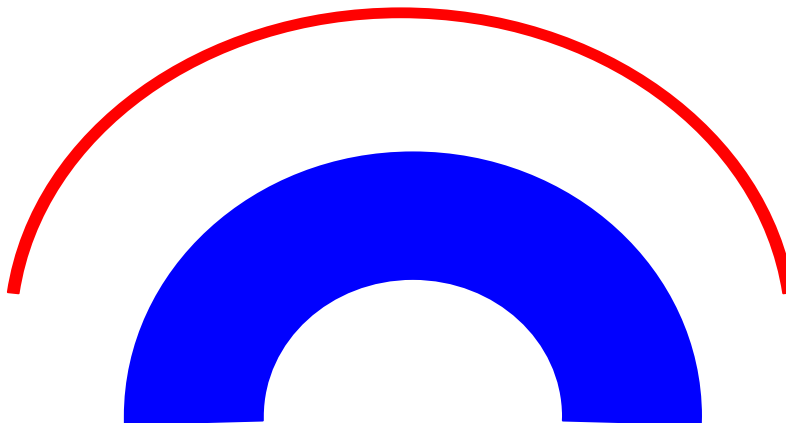


Figure 5-3: Guideline along Curved Treatment

5.1.1 Parallel Guidance

Treating a field using the parallel method is very simple. As previously described, the parallel method is for straight lines only and consequently the first task is to set out a straight line to work from. This is easily achieved by defining one point at one end of the field and one at the other end and connecting the two points with a line. This is termed either the base or key line. From this line, the next parallel guideline is calculated to be across one swath width minus any guide overlap distance entered, see Section 5.3.1. GuideTRAX V3 automatically calculates these parallel guidelines as the vehicle moves around the field. A typical parallel spray pattern is shown in Figure 5-4.



Figure 5-4: A typical spray pattern using parallel guidance. Points “A” and “B” define the base line for all other parallel lines.

The points “A” and “B” should be as far apart as practical to minimise errors in determining the base line. Ideally, the points should be located prior to commencing spraying so that the actual spray pattern along the base line is truly straight. Once the base line is defined, the operator simply needs to follow the indicators on the light bar or Virtual Road window to stay on-line.

As one swath line is finished and the vehicle turns back to start the next pass GuideTRAX V3 will automatically increment to the next parallel line. Swath lines can be sprayed in any order and GuideTRAX V3 will show the nearest parallel line to the vehicle. Swath lines will not be missed, as the treated area on the map screen will always show exactly which areas have been treated and the areas that haven't.

In order to use parallel line guidance, press the **POINT A** button on the Guide Menu. A dot will appear on the screen representing point A. The **POINT A** button will now turn into the **POINT B** button. Once pressed it will create the second dot on the screen.

The **POINT B** button will now revert back to the **POINT A** button

Press the **PARALLEL** button to draw the projected parallel line and activate parallel guidance. The Parallel guidance can be deleted/deactivated on this line by touching the **GUIDE OFF** button or press **POINT A** to redefine a new line (The system will prompt whether to create a new point A or cancel).

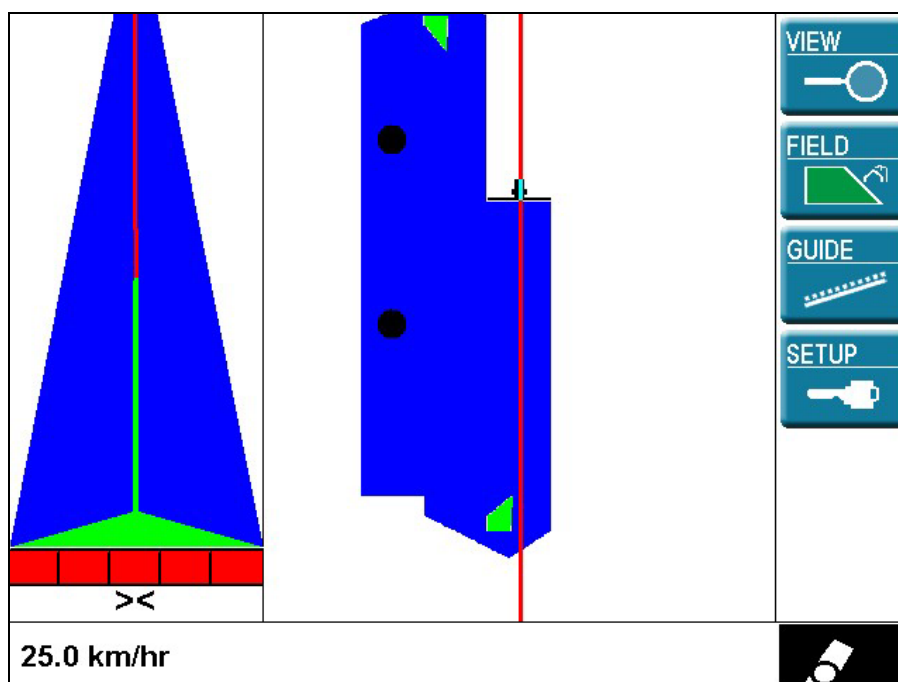


Figure 5-5: Parallel guidance

5.1.2 Racetrack (Lock) Guidance

The racetrack guidance method is called lock guidance because instead of using a pre-defined line, the system “locks” on to a previous swath when calculating the guideline for the next run.

This method of guidance is also very simple. The operator merely has to drive around the perimeter of the field as usual. Typically the outside perimeter would be governed by a fence line that dictates the shape of the field, this may be rectangular or some irregular shape. This is not important to GuideTRAX V3, as the next swath line will be adjacent to the last swath by the distance of one swath width minus any guide overlap distance, see Section 5.3.1. Once again, this is not important as GuideTRAX V3 automatically calculates this for the operator. A typical racetrack spray pattern is shown in Figure 5-6.

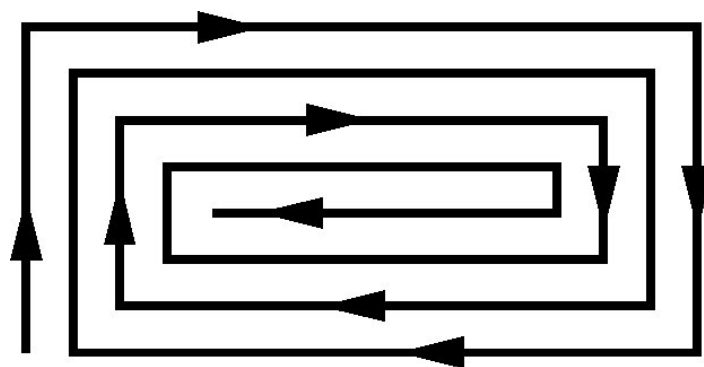


Figure 5-6: Typical Spray Pattern using Racetrack

Once the perimeter of the field is completed the vehicle moves towards the next swath line using the Map screen for guidance. When the vehicle comes alongside the previous treatment (perimeter lap) the operator touches the **LOCK** button in the Guide Menu and then follows the Virtual Road or arrows on the light bar to stay on-line. A guideline is displayed on the Map screen which indicates the line that needs to be followed. GuideTRAX V3 will continue to automatically update the guideline as the vehicle moves around the field.

The guideline will always be computed to be adjacent to the previous treatment. Hence, if the vehicle manoeuvres around a tree the subsequent guideline will also show a deviation. The operator can choose to ignore this guideline and simply steer straight through these areas. A typical racetrack screen is shown in Figure 5-7.

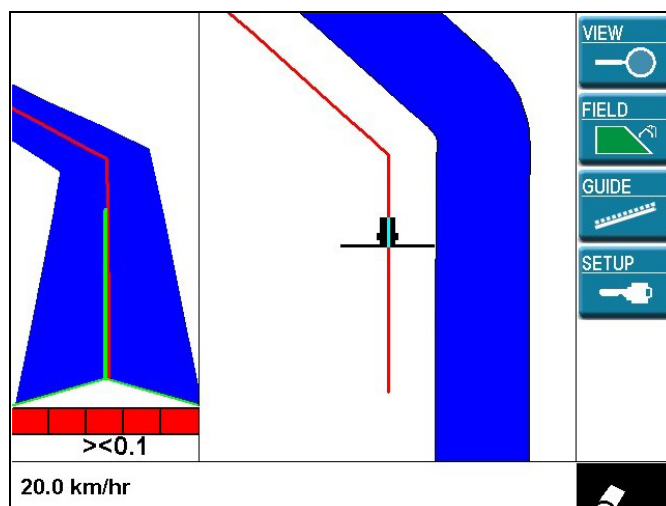


Figure 5-7: Typical guideline from racetrack guide lock

The guideline can be turned off at any time by touching the **GUIDE OFF** button

5.1.3 Contour Lines Method

A contour line is a set of parallel lines that are not straight; however the adjacent lines are parallel to each other. The contour lines method is the same in operation as the racetrack method for spraying a field. The guidance **LOCK** button is used to lock on to an adjacent line, which is the contour line to be followed.

The operator merely has to drive the first contour line in a field as usual. Typically, this will be alongside a contour bank that dictates the pattern or shape of the contour line to be followed. Similar to before, GuideTRAX V3 computes the next guideline to be adjacent to the last swath by the distance of one swath width minus any guide overlap distance, see Section 5.3.1. Once again, this is not important as GuideTRAX V3 automatically calculates this for the operator. A typical contour spray pattern is shown in Figure 5-8.

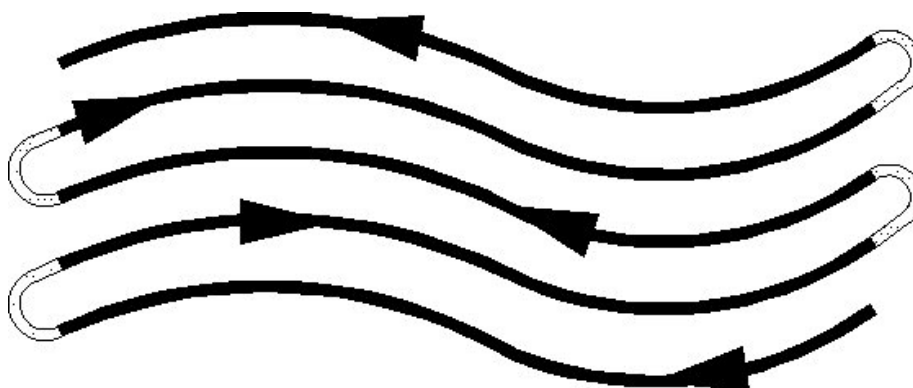



Figure 5-8: Typical Spray Pattern using Contour Lines

As the first contour swath line is completed, the vehicle turns around to commence the next swath line using the Map screen for guidance. Once the vehicle comes alongside the previous swath line (first contour line) the operator engages the guidance lock by pressing the **LOCK** button in the Guide Menu and then follows the indicators on the light bar to stay on-line. A guideline is displayed on the Map screen indicating the lock line that needs to be followed.

At the end of the contour line, guidance is switched off as the vehicle moves away from the treatment. Then as the vehicle is turned around to commence the next contour swath line the guidance lock will automatically be engaged. This pattern is repeated until the field treatment has been completed.

As with the racetrack guidance, the guideline will always be computed to be adjacent to the last swath line. As shown previously if the vehicle manoeuvres around a tree or some other feature the next guideline will show the same pattern.

Hints and Tips:

-  *Turn guidance off before leaving the paddock to prevent erroneous guidance data being displayed.*

The guideline can be turned off at any time by touching the **GUIDE OFF** button

5.2 Guidance information

Guidance information is provided to the operator using the Map screen, the Virtual Road Window and optionally using the external light bar. Each device presents information to the operator that enables them to make decisions on which direction to travel.

The Map screen provides a bird's eye (Map) view of the treated area. The map view clearly shows where the vehicle is and the direction it is heading. It may be configured as the North Up display or the Heads Up display. Most operators prefer the Map Screen to be orientated in the Heads Up mode as the top of the screen represents the direction the vehicle is heading. Furthermore the treated swath shows which areas have been treated and the area yet to be treated.

Alternatively, the display can be split to show both the Map screen and the Virtual Road window. The Virtual Road displays an image directly forward of the vehicle, from a typical vehicle operator position, to show the guideline.

In addition to this directly below the Virtual Road Window is the lightbar which defines the offset to the guideline. The lightbar information is computed from the centreline of the vehicle to the guideline and the lightbar arrows may be configured for user preference. Each arrow can be configured to represent one centimetre or one metre. This same information will also be displayed on the external lightbar (optional item).

In summarising there is no right or wrong method to adopt, it is quite simply a user preference as to which information is used for guidance.

5.2.1 Virtual Road Information

The Virtual Road is very easy to follow as the information displayed is very intuitive. The Virtual Road can be likened to driving along a roadway, however rather than driving on one side of the road, the whole road was used and the white line painted down the centre represented the guideline.

When sitting in a vehicle and looking forward along the road it appears to become smaller as it approaches the horizon. Similarly the Virtual Road becomes smaller as it approaches the top of the screen. Deviations along the road are also easily interpreted as the Virtual Road has no obstructions to block the view along the roadway.

An important aspect to consider is the width of the roadway in the Virtual Road. This does not represent the actual swath width of the treated area, but rather a fat guideline. The actual guideline in the centre of the roadway is the true position where the vehicle should be driven.

The Virtual Road has a vehicle bonnet in the lower portion of the Window with an elongated line extending from the centre of the bonnet as shown in Figure 5-9. This represents the centreline of the vehicle projected forward along the Virtual Road. The tip of the triangular bonnet represents the centre of the vehicle.

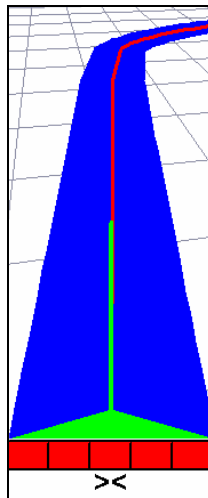


Figure 5-9: The Virtual Road

In essence the red guideline and the green centreline of the vehicle should coincide for perfect guidance.

The width and depth of the Virtual Road may be customised for individual user preferences if necessary, see Section 6.3.3 for further details.

5.2.2 Lightbar

The lightbar information is configured to display how far off-line the vehicle is from the guideline. The accuracy required for the lightbar information will be dependant upon two factors, firstly the input GPS information and secondly the required treatment.

The information that is displayed below the Virtual Road Window may also be displayed on the optional external lightbar. The external lightbar provides the driver with guidance information from a physical device that

is mounted in the driver's line of vision. Offsets are easily seen, without having to look away from the driving task at hand.

The lightbar provides a left-right indicator showing which way the operator must steer to get on to the current guideline. The operator manoeuvres the vehicle to either the left or right as indicated by the lightbar until the vehicle is on-line. A typical light bar display is shown in Figure 5-10.




Figure 5-10: The lightbar display showing the vehicle is on-line

If the vehicle veers off-line, the lightbar will display arrows indicating the direction (left or right) needed to steer to the current guideline. The number of arrows shows how far off-track the vehicle is, determined by preset distances (See section 6.3.4 for details on how to define the lightbar offsets). If the vehicle travels further away than these distances, the display will show how many metres/feet the vehicle is away from the guideline.



Figure 5-11: The lightbar display showing the vehicle is between 2-3m to the left of the guideline. (Note: Distance depends on lightbar settings)




Figure 5-12: The lightbar display showing the vehicle is 5m off-line.

5.3 Guidelines and offsets

GuideTRAX V3 allows the user to adjust the position of the guideline to suit different requirements. Typically this will be either to suit the requirements of the accuracy of the GPS receiver and/or the ability of the operator to follow a guideline. Furthermore it may be to assist in adopting tramline farming where different width implements are used.

5.3.1 Guide Overlap

Prior to using GPS guidance most operators automatically applied a natural overlap to accommodate any inaccuracies whilst driving. This overlap may have varied according to prevailing circumstances such as whether foam markers were visible or not.

GPS guidance however does not have a natural overlap from the operator's mind but rather a mathematical offset that is either applied or not.

The Guide Overlap is simply the amount of overlap that is applied to ensure that no area is missed when applying a treatment if the vehicle is driven wide of the guideline.

This is shown in Figure 5-13.



Figure 5-13 Guidance Overlap

The Guide Overlap setting can be changed in the Guide Options window from the **SETUP MORE** menu.

5.3.2 Guide Offset

When using tramlines in controlled traffic farming practices it may be desirable to use the same guidelines for all farming activities. However the implements may be of different widths and consequently it may be necessary to use an offset.

The Guide Options Window, as shown in Figure 5-14 allows for a Guide Offset to be entered. The Guide Options window can be accessed from

SETUP MORE GUIDE OPTIONS

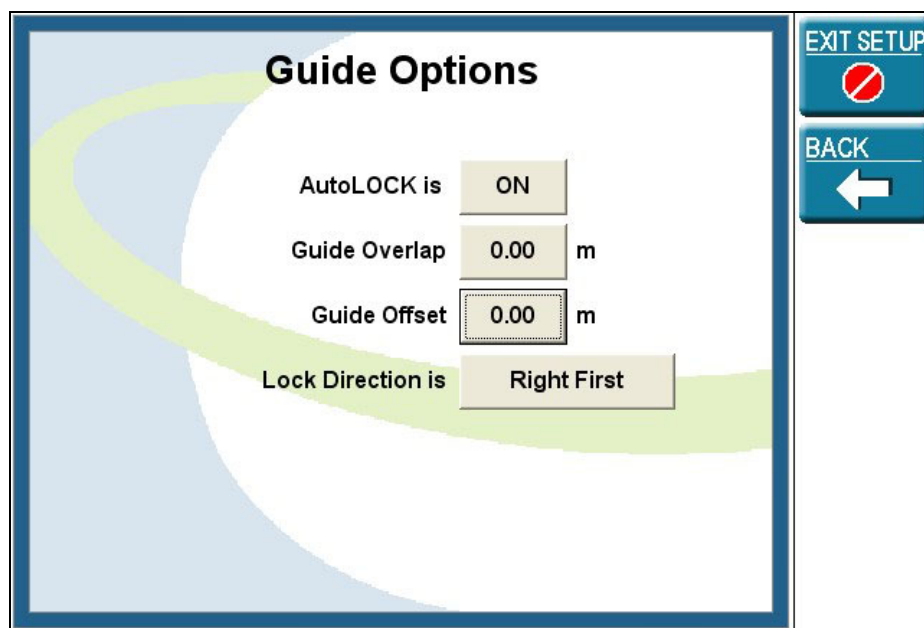


Figure 5-14 Guide Options Window

Hints and Tips:

- ◆ *This feature is only available when using parallel guidance.*



6

Customising the System

6.1 Enabling Options By Password

Model upgrades to Saturn HT or HR along with add on options such as AutoSPRAY, AutoSTEER and FieldNET may be purchased from RINEX.

These options must be enabled in GuideTRAX by password which must be requested from RINEX Technology.

Access:

SETUP ABOUT GUIDETRAX

REGISTER

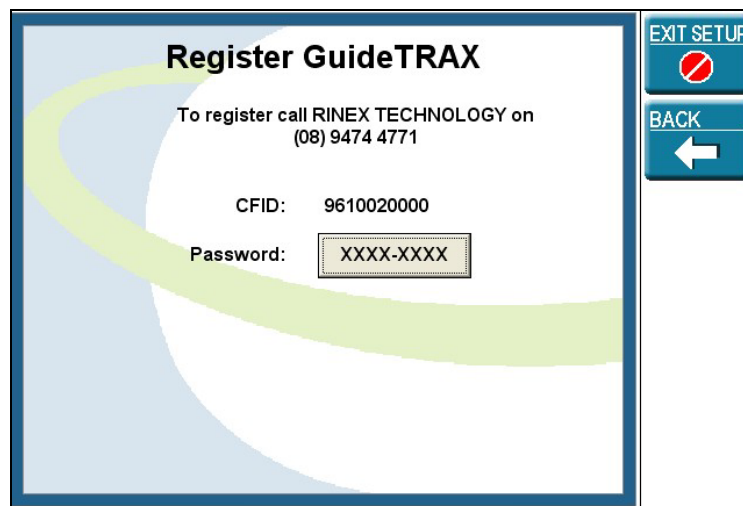


Figure 6-1: Register GuideTRAX Window

- 1) The CFID number displayed on the screen, as shown in Figure 6-1 will need to be quoted when requesting the password from RINEX.
- 2) Touch the **PASSWORD** button to enter the password, and then touch **OK**.
- 3) Touch **BACK BACK** to return to the **Setup** menu.

6.2 GPS Configurations

6.2.1 Defaults

The default settings are:

Required GPS Level:	DIFF
Connection Type:	Serial
GPS Baud:	19200

6.2.2 Changing the GPS Settings

Access: **SETUP MORE GPS SETUP**

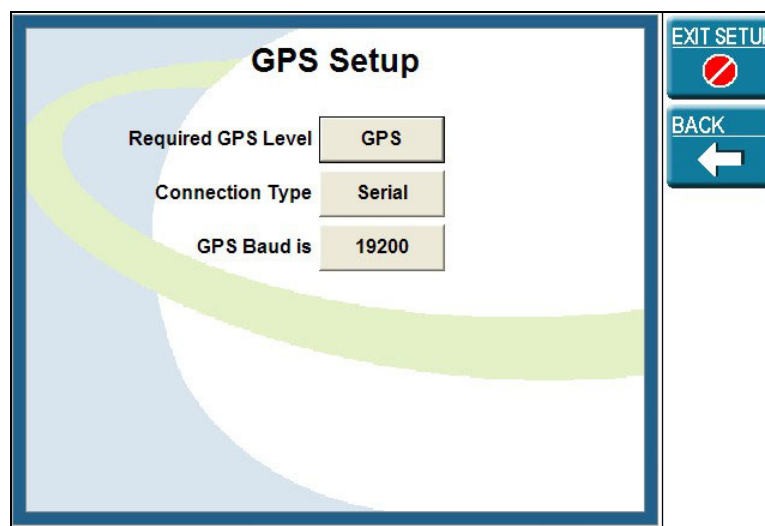


Figure 6-2: GPS Setup Window

Required GPS Level

By default, the system is configured to run on Differential GPS (DIFF). It is recommended that DIFF be used as a minimum.

A lower GPS accuracy can be selected by touching the Required GPS Level button in the GPS Setup Window as shown in Figure 6-2 above.

Select GPS if a higher accuracy signal cannot be acquired. Note that this setting is not recommended as it is not as accurate as higher accuracy signals and therefore significant errors can be introduced into the system when calculating guidance.

When GPS is selected, the scrolling GPS Status Indicator in the bottom right corner of the screen will display the No Differential signal symbol:



if no DIFF signal is being received.

Connection Type

By default Connection Type is set to Serial. Most devices use a serial interface connection. CANbus is an optional extra that must be purchased. If a device has a CANbus interface, Connection Type must be set to CANbus by touching the Connection Type button in the GPS Setup Window as shown in Figure 6-2.

GPS Baud Rate

The GPS Baud button will only be displayed if Connection Type is set to Serial. The GPS Baud rate is set to 19200 by default, but can be changed if required to a lower baud rate by repeatedly touching the GPS Baud button in the GPS Setup Window until it displays the correct speed, as shown in Figure 6-2: GPS Setup Window.

Touch the **EXIT SETUP** button to return to the **Main** menu or **BACK** to return to the **Setup** menu.

6.2.3 Using e-Dif

Access:  (GPS Status Icon)

Once e-Dif has been registered by password (see Section 6.1), the e-Dif button will be displayed on the GPS Status screen as shown in Figure 6-3.

Pressing the e-Dif button turns differential mode off and swaps the MiniMAX receiver from marine beacon to e-Dif mode and calibrates it. It can take several seconds before e-Dif takes effect.

The MiniMAX will return to marine beacon mode when it is powered off/on.

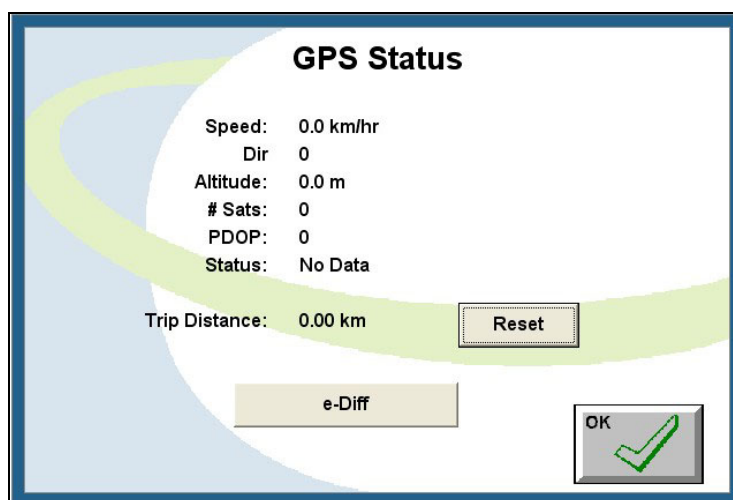


Figure 6-3: GPS Status Window With e-Dif Enabled.


6.3 Guidance Information


6.3.1 Heads Up/North Up

There are two modes of displaying information while it is being recorded (while driving). Choosing one or the other of these two views can affect the guideline being drawn on the screen.

Touch **VIEW** to select Heads Up or North Up mode.

Touch the **HEADS UP / NORTH UP** button to change to either Heads Up or North Up mode.

Heads Up – as the vehicle moves along the ground, the information on the screen is drawn so that the vehicle is always pointing towards the top of the screen, with the ground moving around the vehicle. The Heads Up button  is displayed.

North Up – as the vehicle moves along the ground, it also moves around the screen but the ground is shown as staying stationery. The North Up  button is displayed.

Hints and Tips:

- ◆ *If the Map screen is zoomed too far in or out, it may be difficult to see areas which have already been treated. Touch **VIEW ALL** to see the treated area, then **IN** to see the vehicle and **OUT** to see the vehicle position in relation to the treated area.*
- ◆ *If the vehicle is a long way from the treated areas in the currently selected field, either the vehicle or the treated areas may not be visible on the screen.*
- ◆ *If the treated area is visible but not the vehicle, zoom **IN** to see the vehicle.*
- ◆ *If the vehicle is visible on the screen but not the treated area, touch **VIEW ALL** to see the whole treated area, then zoom **IN** to see more detail of the area around the vehicle.*
- ◆ *If zoomed too far out, the vehicle will appear as a large dot on the screen. As you zoom in, the vehicle will increase in size on the screen until it resembles the selected rig.*

6.3.2 Zooming In and Out While Driving

While the vehicle is moving, GuideTRAX will not allow the system to zoom too far Out or View All in Heads Up view, but will allow the system to zoom In as close as possible.

In North Up view, it is possible to View All and zoom In or Out as far as required while driving.

6.3.3 Virtual Road

Access: **SETUP MORE VIRTUAL ROAD SETUP**

The Virtual Road can be turned on and off and customised for width and depth of view, however, the default values, as shown in Figure 6-4 are the recommended values.

Making the Virtual Road too short (depth) can result in corners coming up too quickly to be able to turn in time. Making the Back Width too narrow can create a distorted appearance which is difficult to drive to. Making the Road Width too narrow can also make it difficult to drive to.

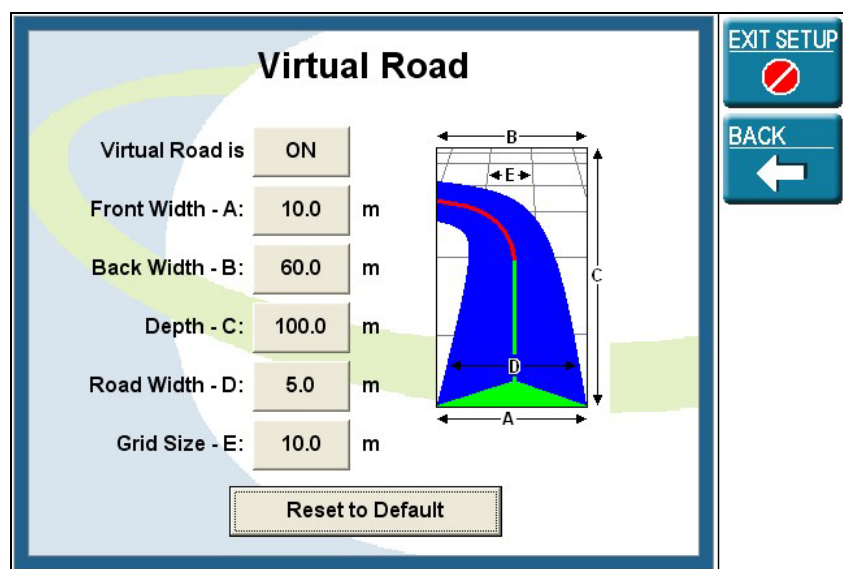


Figure 6-4: The Virtual Road Window

Touching the **RESET TO DEFAULT** button will change all settings in the Virtual Road Window back to those shown in Figure 6-4 above.

Touch **EXIT SETUP** to return to the Main Screen, or **BACK** to return to the Setup menu.

6.3.4 Lightbar

Access:

SETUP MORE LIGHTBAR SETUP

Lightbar Communication Speed

Each lightbar communicates at a speed of either 19200 baud or 9600 baud. The default setting as shown in the Lightbar Setup Window in Figure 6-5 is 19200 baud. This setting can be changed to 9600 baud for older lightbars.

Hints and Tips:

- ◆ *If the lightbar displays only "Ver 1.2x" then it is likely that this setting needs to be changed.*

Lightbar Distance Settings

The lightbar distance settings can be customised for higher or lower accuracy depending on the accuracy of the GPS receiver and the current job.

Each of the distance settings represents how far away (in metres) the vehicle is from the guideline. In the default settings shown in the Lightbar Setup Window in Figure 6-5, the $\gt\lt$ symbol set to 0.20m means that the lightbar will display $\gt\lt$ to indicate that the guideline is being followed to an accuracy of up to 0.20m.

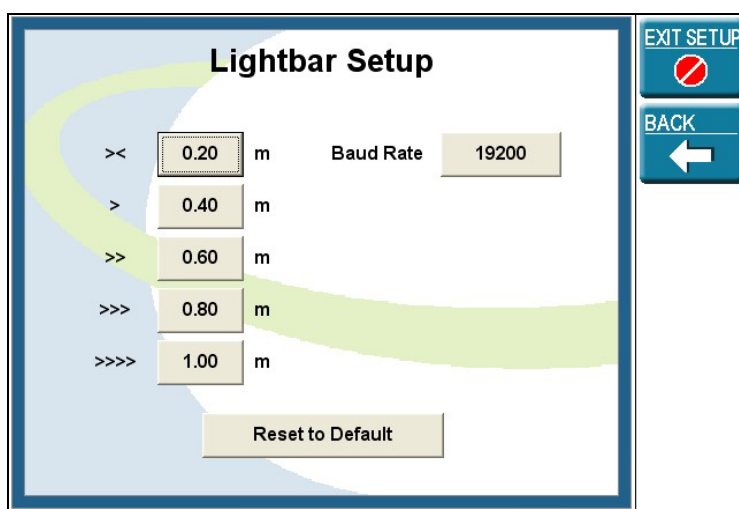


Figure 6-5: Lightbar Setup Window

It is recommended that the lightbar limits are set in relation to GPS accuracy. The default lightbar settings shown in Figure 6-5 are set for the default GPS type of DGPS (Differentially corrected GPS).

For a higher accuracy GPS receiver, it may be more appropriate to set the single arrow \gt to 0.10m, with other settings set similarly.

For e-Dif, less accuracy may be more appropriate and for GPS only (i.e. without differential correction), settings should be set to even lower accuracy.

Pressing the **RESET TO DEFAULT** button will change all settings back to those shown in Figure 6-5.

Touch **EXIT SETUP** to return to the Main Screen, or **BACK** to return to the Setup menu.

6.4 The Screen

Access:

SETUP **DISPLAY SETUP**

6.4.1 Night Mode

Night Mode is designed to assist night time driving.

When turned ON, Night Mode turns the background from white to black. Text which was black is then displayed white, and Guide Points (A & B) are displayed grey.

Night Mode can be turned ON or OFF at any time.

6.4.2 Grid

By default the grid is OFF and the Grid Spacing is set to 100 metres. The grid is a light-grey pattern on the background of the Map Screen. When turned ON, it enables the driver to quickly assess a distance or area in a particular place on the screen. For example, the area encompassed by a grid square measuring 100m x 100m = 1 Ha.

Touch the **GRID SIZE** button to change the Grid spacing figure.

6.4.3 Measurement Units

The units which are displayed on the screen throughout GuideTRAX V3 can be set to either Metric or Imperial, and can be changed from one to the other and back again at any time.

By default, the Measure Units are set to Metric.

6.4.4 Position Units

The vehicle position can be displayed in the Status Bar in either Cartesian coordinates (E/N - Easting & Northing) or geographical (Latitude & Longitude). By default the position units are set to E/N.

6.4.5 Status Bar

The Status Bar is the left half of the area at the bottom of the Main screen. Repeatedly touching this area will cycle through each of the Status messages selected in the Status Bar Setup window. By default, all Status Bar information is turned OFF.

Text shown in light grey in the Status Bar Setup Window indicates that those status messages are not available as the functions they report are not available in the HL model.

To turn a status message on so that it will appear in the Status Bar, touch the button next to the required message in the Status Bar Setup window.

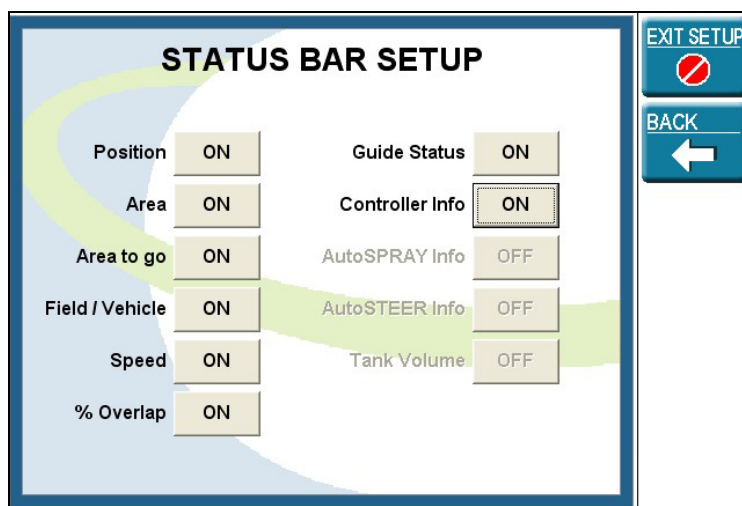


Figure 6-6: Status Bar Setup Window

For more information about the information provided in each message, see Section 2.6.

6.5 Turning Treatment Recording ON and OFF

6.5.1 The RINEX Toggle Switch

The RINEX Toggle Switch is supplied with every new system. It can be used to start and stop treatment recording – either on its own or by being connected to a controller (in which case the controller's master switch starts and stops treatment recording).

6.5.1.1 Using the RINEX Toggle Switch Alone

When used without being connected to a third party controller, the RINEX Toggle Switch is plugged into the Controller port on the front of the Saturn H interface unit. Switching the RINEX Toggle Switch on or off will turn treatment recording ON or OFF.

6.5.1.2 Connecting the RINEX Toggle Switch to a Third Party Controller

When connected to a third party controller, the RINEX Toggle Switch must be permanently left in the OFF position (if the RINEX Toggle Switch is left on, then treatment recording can't be turned off) and the third party controller's master switch must be used to turn both treatment and recording on and off together.

- 1) Follow the instructions in the Saturn H Guidance System Installation Manual for installation of the RINEX Toggle Switch, connecting it to the Controller port on the Saturn H interface unit.
- 2) Touch **SETUP VEHICLE SETUP RIG SETUP**
- 3) In the Edit Rig window, touch **FLOW CONTROL**
- 4) Touch the **FLOW CONTROLLER** button as shown in Figure 6-7.

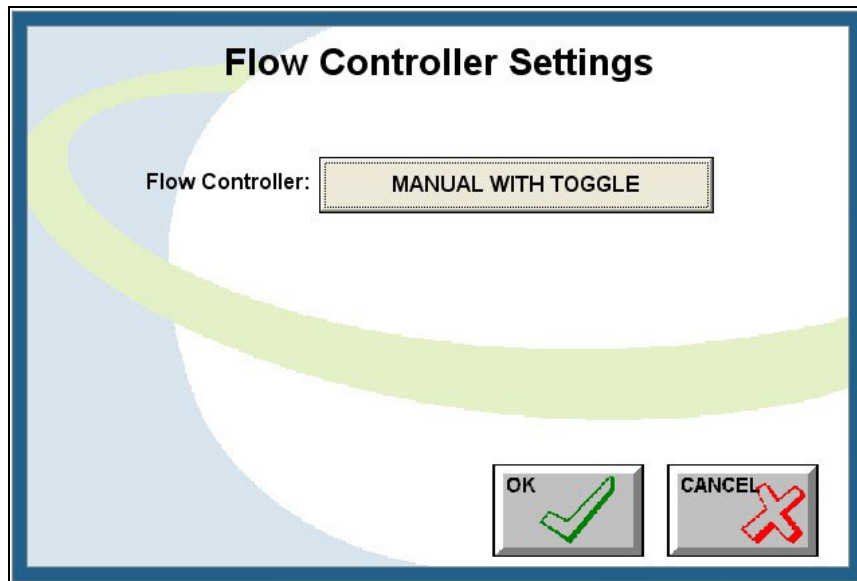


Figure 6-7: Flow Controller Settings Window

- 5) Select Manual With Toggle from the Flow Controller list.
- 6) Touch **ACCEPT OK OK**
- 7) Touch **SWITCH SETUP**
- 8) Set Master Switch to **TOGGLE** as shown in Figure 6-8.

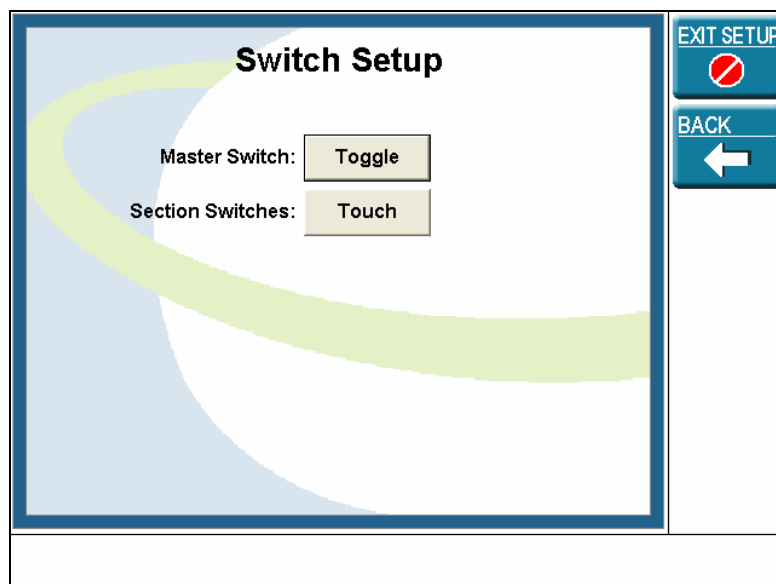


Figure 6-8: Switch Setup Window

- 9) Touch **EXIT SETUP** to return to the Main Screen.

6.5.2 Using Touch Instead Of a Switch

Treatment recording can also be started and stopped by touching the Vehicle Icon on the Map screen or by touching the green bonnet triangle in the Virtual Road Window.

In this case, the Master Switch will need to be set to **TOUCH**

6.5.3 Connecting Directly to a Third Party Controller

Treatment recording can also be started and stopped with compatible controllers that connect directly to the Saturn H system. It will be necessary to ensure that the correct data interface cable is used.

- 1) Follow the instructions in the Saturn H Guidance System Installation Manual for connecting to a Third party controller to the Controller port on the Saturn H interface unit.
- 2) Touch **SETUP VEHICLE SETUP RIG SETUP**
- 3) In the Edit Rig window, touch **FLOW CONTROL**
- 4) Touch the **FLOW CONTROLLER** button.
- 5) Select the desired Third Party Controller from the Flow Controller list.
- 6) Touch **ACCEPT OK OK**
- 7) Touch **SWITCH SETUP**
- 8) Set Master Switch to **EXTERNAL** and Section Switches to **EXTERNAL**.
- 9) Touch **EXIT SETUP** to return to the Main Screen.

6.6 The RINEX Button Box (Optional Extra)

The RINEX Button Box connects to one of the two USB ports on the Saturn H interface unit and has four buttons which can each be set to perform various GuideTRAX functions.

Access:

SETUP MORE REMOTE BUTTONS

The default settings for each button are shown in Figure 6-9.

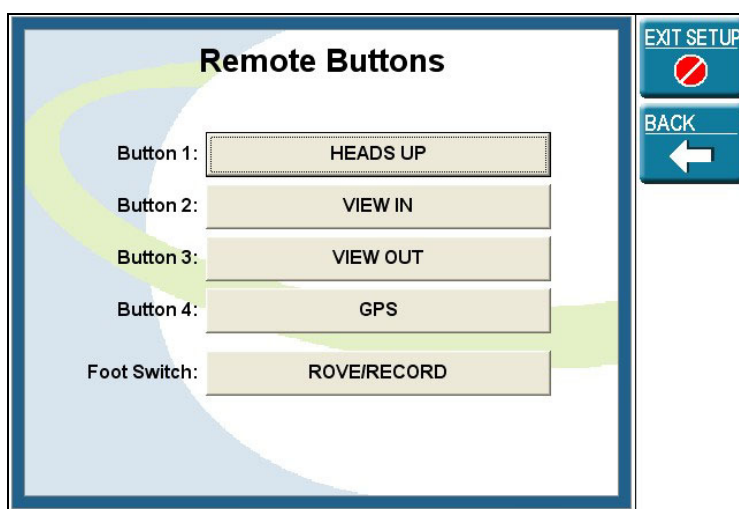


Figure 6-9 Buttons Setup Window

These settings can be changed for each button by touching on the value assigned to that button. All of the options listed in Table 6-1 are available to all buttons, and using each option has the same effect as going through the menus to select the function or turn the setting ON or OFF.

The RINEX Button Box and the RINEX Footswitch can both be connected at the same time, so that five buttons are then available.


6.7 The RINEX Foot Switch (Optional Extra)

The RINEX Foot Switch is designed to be operated by foot and is connected to one of the USB ports on the Saturn H interface unit.

By default, the Foot Switch is set to Rove/Record, but can be changed to perform any of the functions listed in Table 6-1.

The RINEX Button Box and the RINEX Footswitch can both be connected at the same time, so that five buttons are then available.

Table 6-1: Button Box and Foot Switch Settings

Function	Function Location	Action Performed By Button
CONTOUR GUIDE ON/OFF	GUIDE LOCK	Enables Lock guidance.
DAY/NIGHT	SETUP DISPLAY NIGHTMODE	Toggles between black (Night) or white (Day) background.
GPS	 GPS Status icon bottom right corner of screen	Brings up the GPS Status window.
HEADS UP	VIEW HEADS UP	Toggles the view between Heads Up and North Up.
LIGHTBAR INTENSITY	GUIDE MORE LIGHTBAR	Brings up the Lightbar (optional) Intensity window.
PARALLEL GUIDE ON/OFF	GUIDE PARALLEL	Switches Parallel guidance on or off (after AB points have been set).
POINT AB	GUIDE POINT A or POINT B	Sets Point A, or if Point A has already been set, sets Point B.

Function	Function Location	Action Performed By Button
ROVE/ RECORD	Vehicle Icon on Map Screen OR Green bonnet in Virtual Road Window.	If Touch has been selected in Setup > Vehicle Setup > Switch Setup, then pressing a button which has been set to Rove/Record is the same as touching the screen to turn treatment recording on and off.
VIEW ALL	VIEW VIEW ALL	Zooms display to show all of the recorded treatment data in the current field.
VIEW IN	VIEW VIEW IN	Zooms display in.
VIEW OUT	VIEW VIEW OUT	Zooms display out.
VIRTUAL ROAD	SETUP MORE VIRTUAL ROAD SETUP	Turns the Virtual Road window on or off.

6.8 The Multi Section Boom Interface (Optional Extra)

An optional feature of GuideTRAX V3 is the ability to display all active boom sections on the screen using the Multi Section Boom Interface (MSBI) as the individual sections are switched ON and OFF. This enables optimal coverage of a field, minimising the overlap.

The MSBI is connected to the controller port on the Saturn H interface unit and to the spray controller. It detects the status of each boom section (ON or OFF) and passes this information to GuideTRAX where it is recorded and mapped on the screen.

The red section indicators under the Virtual Road window reflect the information about each boom section (ON or OFF) as it is received from the MSBI.

6.8.1 Installation

Follow the instructions supplied with the Multi Section Boom Interface, and connect the interface cable between the MSBI and the controller port on the Saturn H interface unit.

6.8.2 Enabling the MSBI

- 1) Touch **SETUP VEHICLE SETUP RIG SETUP**
- 2) Touch **FLOW CONTROL**
- 3) In the Flow Controller Settings window, touch the **FLOW CONTROLLER** button.

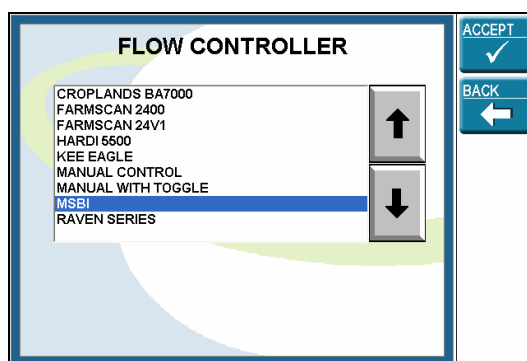


Figure 6-10: Flow Controller List Window

- 4) Select MSBI from the Flow Controller list as shown in Figure 6-10

If the MSBI is connected to bidirectional valves (e.g. Hardi Valves), then select Hardi MSBI.

- 5) Touch **ACCEPT OK**

- 6) Touch **BOOM SETTINGS**

- 7) Check that the boom settings are correct and make any required changes.

- 8) Touch **OK OK SWITCH SETUP**

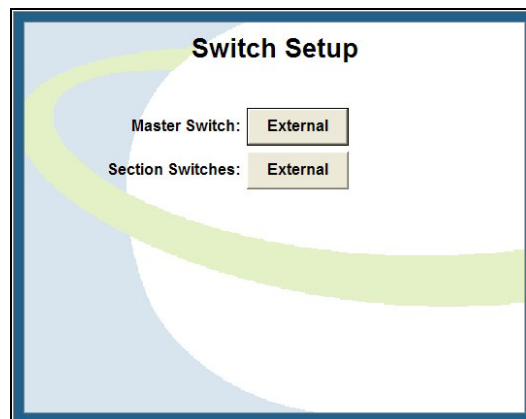


Figure 6-11 Switch Setup Window

- 9) Select External for both Master Switch and Section Switches.

- 10) Touch **EXIT SETUP** to return to the Main Screen.

The current field must be restarted before the new settings will take effect.



7

The Menu System

GuideTRAX V3 software is operated and configured by a menu system. The menu comprises of a choice of buttons which will have an action upon GuideTRAX V3. As previously described the button is accessed by touching or tapping the appropriate part of the screen.

The GuideTRAX V3 menu typically comprises up to five buttons aligned along the right hand side of the screen. Touching any one of these buttons will either activate the function associated with the button or lead to a sub-menu. A sub-menu is similar to the main menu whereby touching the button may either activate a function or lead to a further sub-menu.

This manual refers to the Main menu as that which is shown when the system is first started.

A useful rule of thumb is that if the menu does not show a **BACK** button then the system is at the Main menu.

This section describes the function of each button and options which can be set in each menu and sub-menu.

7.1 Menu Layout

One of the integral philosophies of the GuideTRAX V3 menu is that regardless of the software version, the HL, HT, or HR, the menu system should be essentially the same. This is to ensure that as users requirements are expanded there is a common structure and immediate recognition of the menu layout.

Consequently some of the buttons will have no effect in particular versions of GuideTRAX V3 software. In these cases the button is typically greyed out indicating to the user that the button is not available or has no effect in that particular version of GuideTRAX V3.

The Saturn HL menu is illustrated in Figure 7-1 with the Main menu shown across the page and the sub-menus are shown down the length of the page. The functions that are not available are shown as a transparent button.

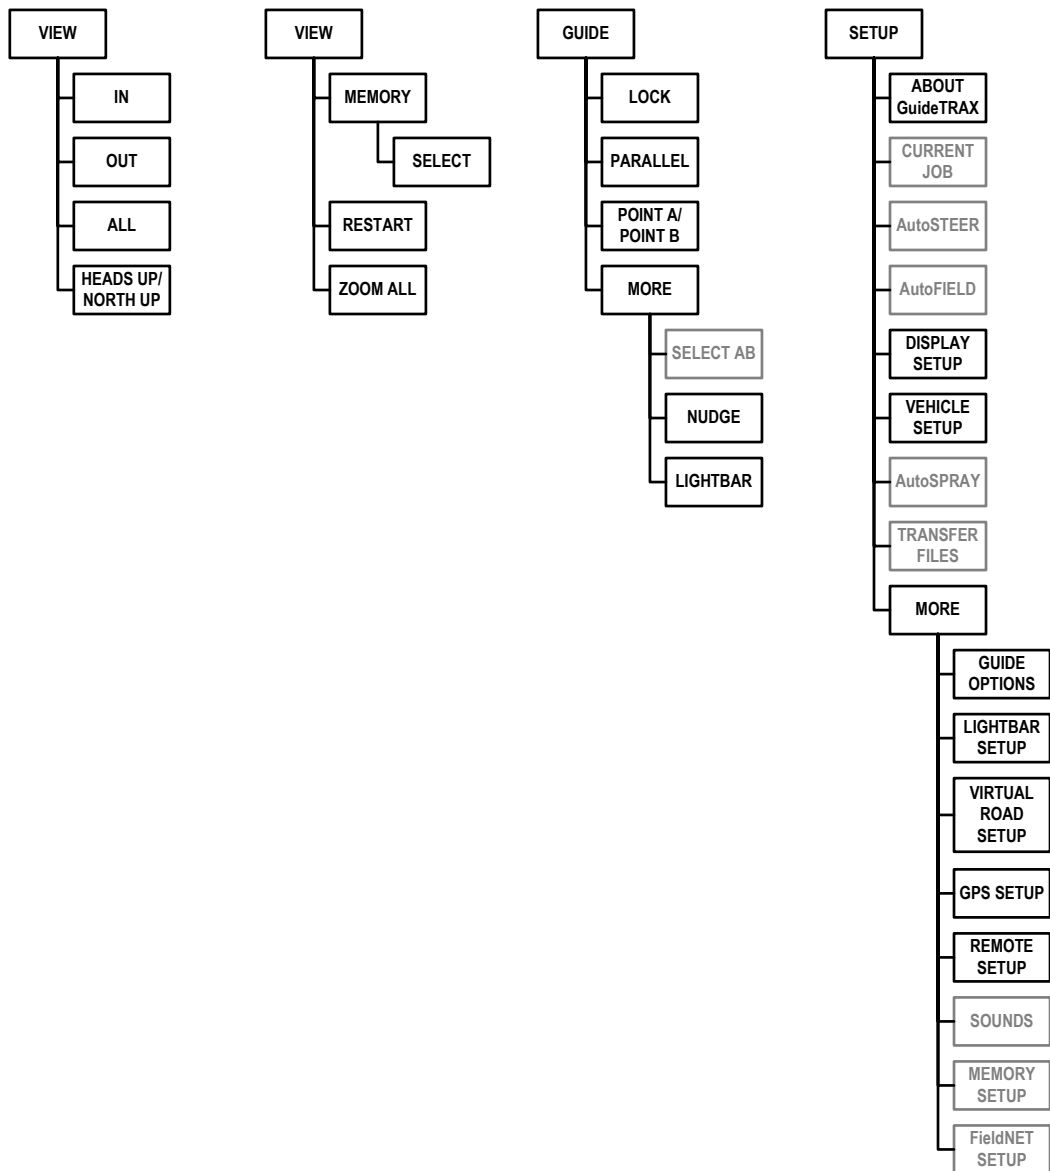


Figure 7-1: The HL Menu Layout

7.2 The Main Menu

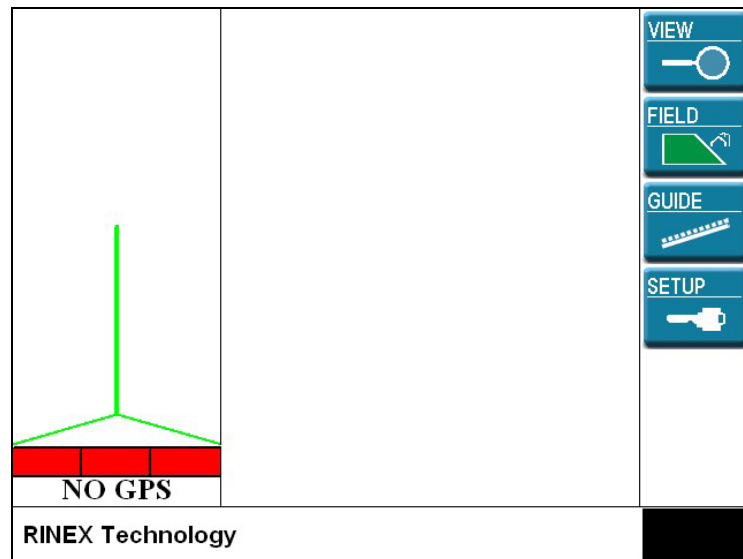






Figure 7-2: The Main Menu

Overview: The MAIN Menu, as illustrated in Figure 7-2 is always displayed when the Saturn H system is started. The Main menu provides access to the sub-menus for configuration and operation of the system.

Name	Button	Function
VIEW Button		The VIEW button accesses the View menu which allows the map screen view to be changed.
FIELD Button		The FIELD button accesses the Field menu to start stop, save and view field information.
GUIDE Button		The GUIDE button accesses the Guide menu to activate all forms of vehicle guidance.
SETUP Button		The SETUP button accesses the General Setup menu which allows the system to be configured for optional devices and user preference. See Section 7.3 for a description of the General Setup menu.

7.2.1 View

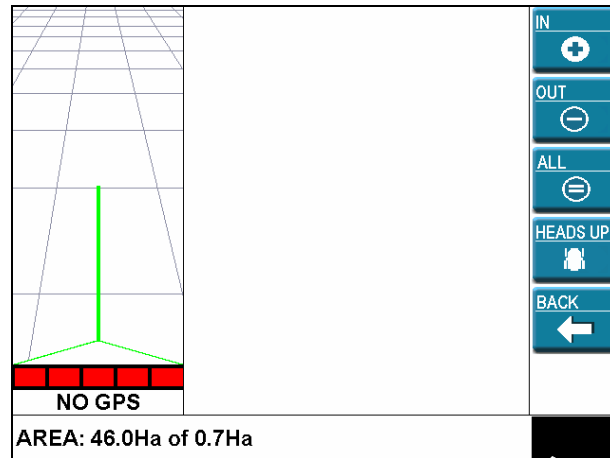








Figure 7-3: The View Menu

Overview: The VIEW Menu, as illustrated in Figure 7-3 configures the display characteristics of the Map Screen.

Name	Button	Function
IN Button		The IN button magnifies the image on the Map Screen based upon the central point of the screen.
OUT Button		The OUT button shrinks the image on the Map Screen based around the central point of the screen.
ALL Button		The ALL button displays all of the current field on the Map Screen. If there is no treated area in the current field, the button will have no effect.
HEADS UP / NORTH UP Button	 	This is a toggle button, it can be either HEADS UP or NORTH UP. The button toggles the Map Screen between the two modes, Heads or North Up. The Map Screen will be in the Heads Up mode when the HEADS UP button is displayed.
BACK Button		The BACK button returns the system to the Main Menu.

7.2.2 Field

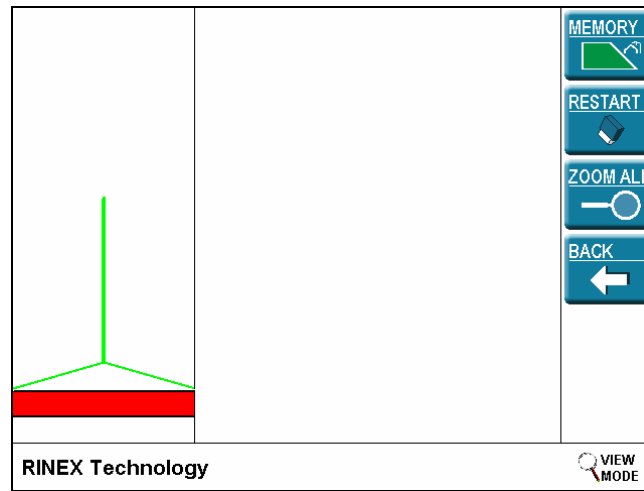






Figure 7-4: The Field Menu

Overview: The FIELD Menu, as illustrated in Figure 7-4 allows fields to be started, stopped, saved and to view information pertaining to fields.

Name	Button	Function
MEMORY Button		The MEMORY button selects the Virtual Memory to change the current memory slot.
RESTART Button		The RESTART button clears information stored in the current field.
ZOOM ALL Button		The ZOOM ALL button displays all of the current field on the Map Screen. In this view touching on the Map screen will zoom in on that area.
BACK Button		The BACK button returns the system to the Main Menu.

7.2.2.1 Field Memory

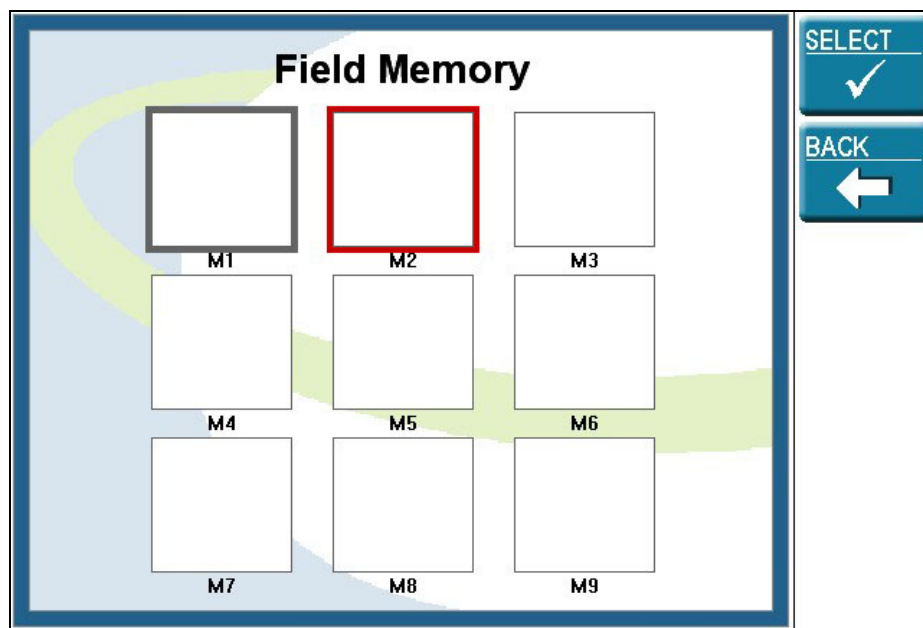


Figure 7-5: The FIELD MEMORY Window

Overview: The Field Memory Window, as shown in Figure 7-5 allows selection of a memory slot to be used as the current field. Memory slots which contain treatment data will display a miniature image of the treatment data recorded in the field.

Access: **FIELD MEMORY**

Name	Function
M1 to M9	The memory slots are represented as squares (not buttons) and are labelled M1 to M9 respectively. The current selected memory slot will be indicated with a red border as illustrated in Figure 7-5. When a new field is selected, the border around the current memory slot changes to grey and the new memory slot will be indicated with a red border.
SELECT Button	The SELECT button will load the selected memory slot, close the window and return to the previous Menu.
BACK Button	The BACK button will close the Window and return to the previous Menu without changing the currently loaded memory slot.

7.2.2.2 Restart Field

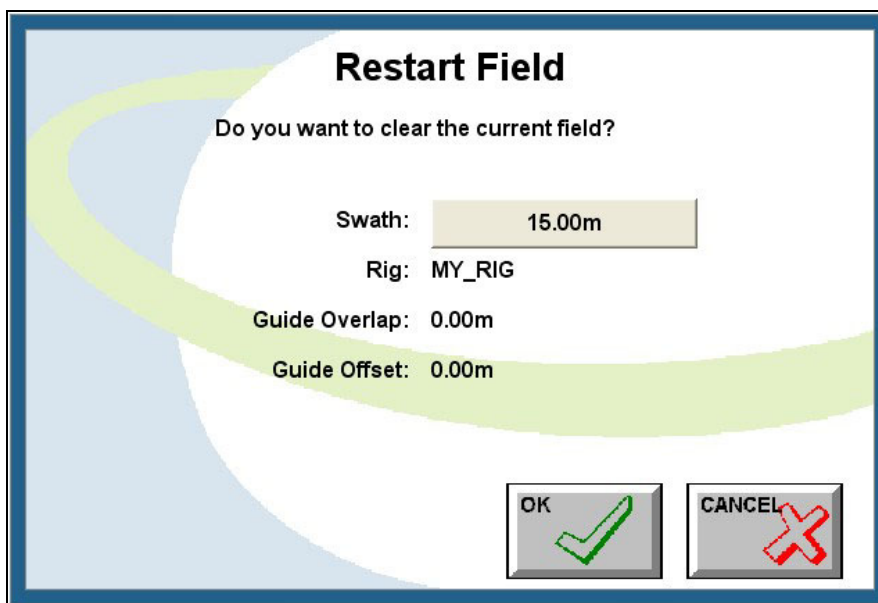


Figure 7-6: The RESTART FIELD Window

Overview: The RESTART FIELD Window, see Figure 7-6 clears data currently stored in the field. It also displays the vehicle and guidance parameters that pertain to data for the current field.

Access: **FIELD RESTART**

Name	Function
SWATH WIDTH Button	The SWATH WIDTH button will be displayed if the rig is setup with one section. Touching the Swath Width button allows the swath width to be changed in the Restart window. If the boom has more than one section, the swath width must be changed in SETUP VEHICLE SETUP RIG SETUP BOOM SETTINGS
OK Button	The OK button clears all treatment data in the current memory slot, updates any changes to the vehicle, closes the Window and returns to the Main Menu.
CANCEL Button	The CANCEL button will ignore any selected actions, close the Window and return to the previous Menu.

7.2.3 Guide

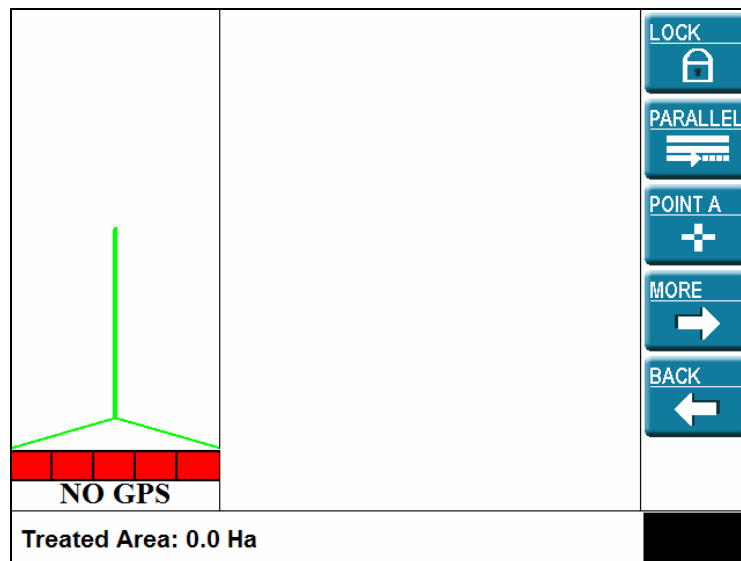











Figure 7-7: The Guide Menu

Overview: The GUIDE Menu as illustrated in Figure 7-7 allows the system to be configured and selected for vehicle guidance.

Name	Icon	Function
LOCK / LOCK OFF / GUIDE OFF Button	  	<p>This is a toggle button, it either invokes or cancels Lock guidance. To invoke guidance the LOCK button will be visible, once activated it will toggle the button to LOCK OFF. The button will stay in the LOCK OFF state until the system finds lock, when it will change to GUIDE OFF. If it loses lock, the button will change back to the LOCK OFF state. While the system has lock, it will remain in the GUIDE OFF state.</p> <p>To cancel Lock guidance touch the GUIDE OFF button. The button will then toggle to LOCK.</p>

Name	Icon	Function
PARALLEL / GUIDE OFF Button	 	This is a toggle button which either invokes or cancels parallel guidance. To invoke guidance the PARALLEL button will be visible, once activated it will toggle the button to GUIDE OFF. To cancel parallel guidance touch the GUIDE OFF button. The button will then toggle to PARALLEL.
POINT A/ POINT B Button	 	This is a toggle button, it either sets Point A or Point B for parallel guidance. To set guide Point A the POINT A button will be visible, once set the button will toggle to POINT B. Once Point B has been set the button will toggle to Point A.
MORE Button		The MORE button selects the Guide More menu, to allow access to the Nudge guideline option and to allow adjustment of lightbar intensity.
BACK Button		The BACK button returns the system to the Main Menu.

7.2.3.1 Guide More Menu

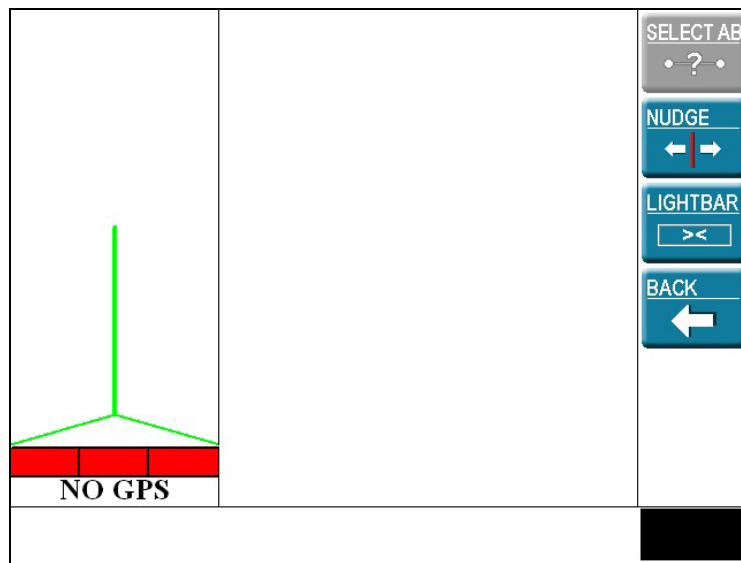






Figure 7-8: Guide More Menu

Overview: The GUIDE MORE Menu, see Figure 7-8 is for selecting and configuring Guide options.

Access: **GUIDE MORE**

Name	Button	Function
SELECT AB Button		The SELECT AB button is not operational in the HL model.
NUDGE Button		The NUDGE button allows the GPS guideline to be temporarily adjusted.
LIGHTBAR Button		The LIGHTBAR button will display the Lightbar Intensity window.
BACK Button		The BACK button returns the system to the Guide menu.

7.2.3.2 Nudge

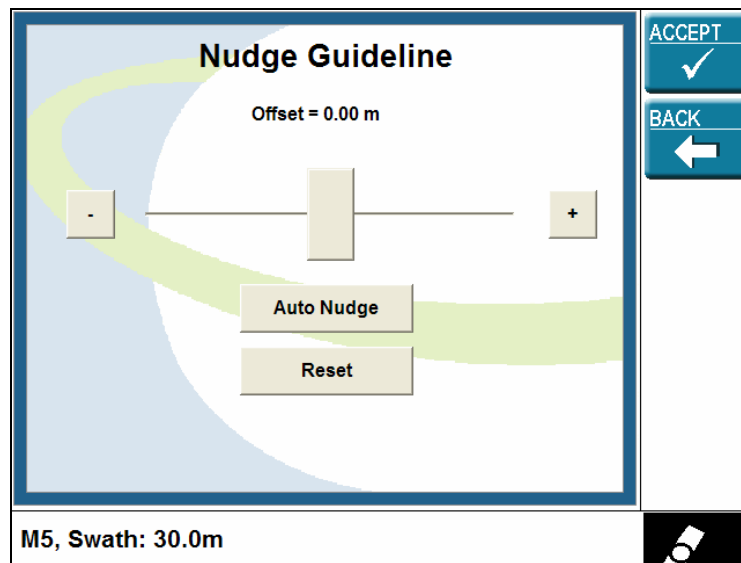


Figure 7-9: The Nudge Guideline Window

Overview: The Nudge Guideline Window, see Figure 7-9 allows the parallel guideline to be temporarily adjusted either left or right to allow for GPS drift.

Access: **GUIDE** **MORE** **NUDGE**

Name	Function
OFFSET VALUE Button	The OFFSET VALUE indicates how much the parallel guideline will be moved left or right from the original set AB points.
SLIDER BAR	Dragging the SLIDER BAR to the left or right will increase or decrease the Offset value as the bar is moved left or right. The ACCEPT button must be pressed for the new offset value to take effect.
+/- Buttons	The + and – buttons will step the offset value up or down by 0.01m each time they are pressed.
AUTO NUDGE Button	When pressed, the AUTO NUDGE button will cause the offset value to be automatically calculated based on how far the vehicle is offline. The ACCEPT button must be pressed for the new offset value to take effect.

RESET Button	The RESET button will set the Offset value back to 0.
ACCEPT Button	The ACCEPT button will close the Window, return to the previous Menu and cause the parallel line to be adjusted left or right by the offset value.
BACK Button	The BACK button will return you to the previous screen, but will not move the guideline.

1. Lightbar Intensity

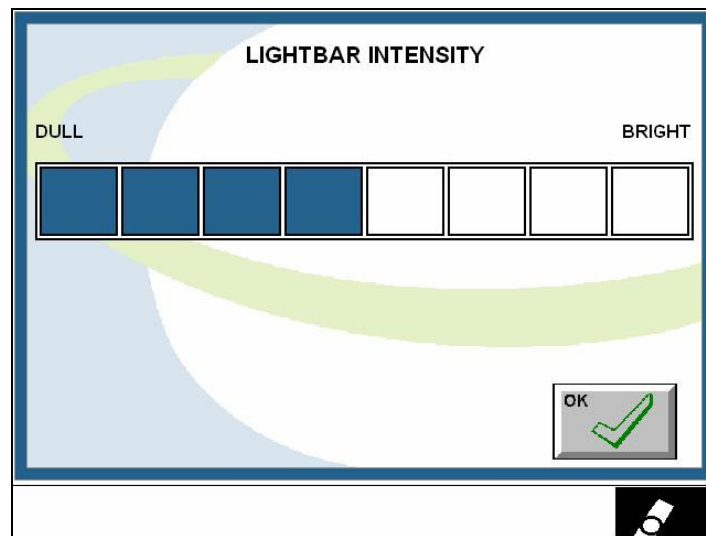


Figure 7-10: The Lightbar Intensity window

Overview: The LIGHTBAR INTENSITY Window, see Figure 7-10 controls the brightness of the optional lightbar.

Access: **GUIDE** **MORE** **LIGHTBAR**

Name	Function
DULL BRIGHT Buttons	The squares between DULL and BRIGHT are buttons which control the brightness (intensity) of the optional lightbar.
OK Button	The OK button will update the selected actions, close the Window and return to the previous Menu.

7.3 General Setup

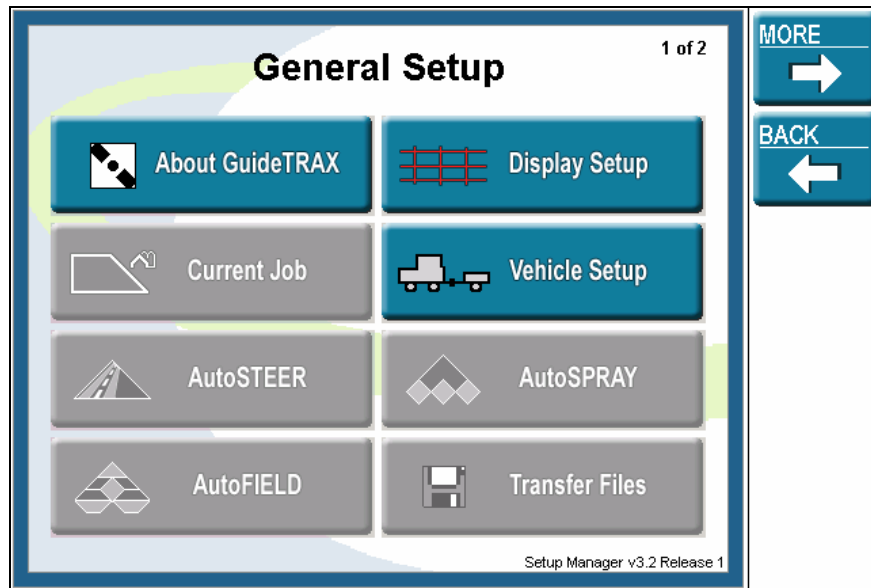












Figure 7-11: The General Setup Menu Page 1

Overview: The GENERAL SETUP Menu Page 1, as illustrated in Figure 7-11 allows the system to be configured for optional devices and user preferences.

Access: **SETUP**

Name	Button	Function
ABOUT GUIDETRAX Button		The ABOUT GUIDETRAX button selects the About GuideTRAX window to allow registration of e-Dif and upgrade to other GuideTRAX models. Also provides useful system information including software version.
CURRENT JOB Button		The CURRENT JOB button is not operational in the HL model.
AutoSTEER Button		The AutoSTEER button is not operational in the HL model.

Name	Button	Function
AutoFIELD Button		The AutoFIELD button is not operational in the HL model.
DISPLAY SETUP Button		The DISPLAY SETUP button selects the Display Setup window to allow configuration of the display screen and Status Bar.
VEHICLE SETUP Button		The VEHICLE SETUP button selects the Vehicle Setup sub-menu to allow configuration of Links, Rigs and Switches.
AutoSPRAY Button		The AutoSPRAY button is not operational in the HL model.
TRANSFER FILES Button		The TRANSFER FILES button is not operational in the HL model.
MORE Button		The MORE button selects Page 2 of the General Setup Menu
BACK Button		The BACK button returns the system to the main menu.

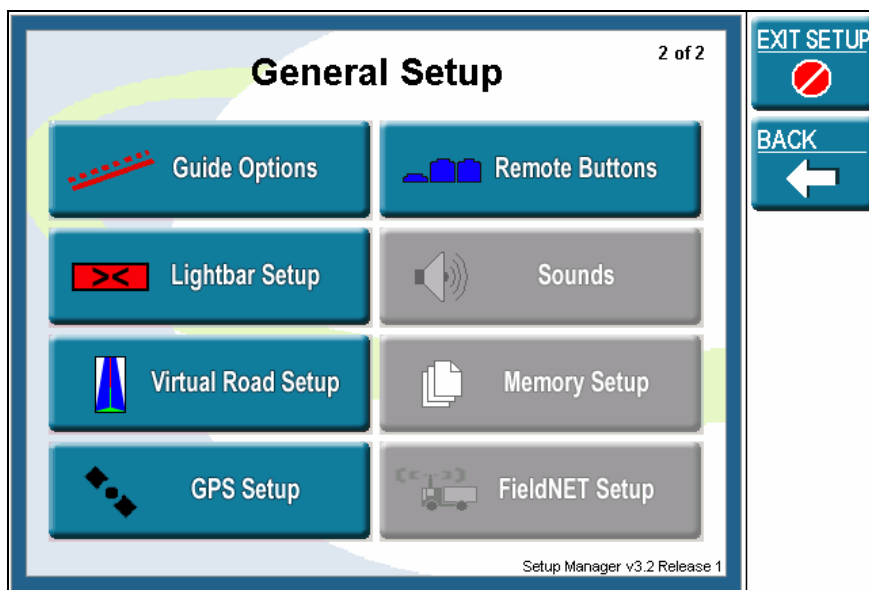












Figure 7-12: The General Setup Menu Page 2

Overview: The GENERAL SETUP Menu Page 2, as illustrated in Figure 7-12 allows the system to be configured for optional devices and user preferences.

Access: **SETUP MORE**

Name	Button	Function
GUIDE OPTIONS Button		The GUIDE OPTIONS button selects the Guide Options window to allow configuration of guidance settings such as guide overlap, offset and lock search direction.
LIGHTBAR SETUP Button		The LIGHTBAR SETUP button selects the Lightbar Setup window to allow configuration of lightbar limits and communication speed.
VIRTUAL ROAD SETUP Button		The VIRTUAL ROAD SETUP button selects the Virtual Road Setup window to allow configuration of Virtual Road dimensions.

Name	Button	Function
GPS SETUP Button		The GPS SETUP button selects the GPS Setup window to allow configuration of communication speed and level of accuracy.
REMOTE BUTTONS Button		The REMOTE BUTTONS button will display the Remote Buttons window for the external button box (optional).
SOUNDS Button		The SOUNDS button is not operational in the HL model.
MEMORY SETUP Button		The MEMORY SETUP button is not operational in the HL model.
FIELDNET SETUP Button		The FIELDNET SETUP button is not operational in the HL model.
EXIT SETUP Button		The EXIT SETUP button returns the system to the Main menu.
BACK Button		The BACK button returns the system to Page 1 of the General Setup menu.

7.3.1 About GuideTRAX

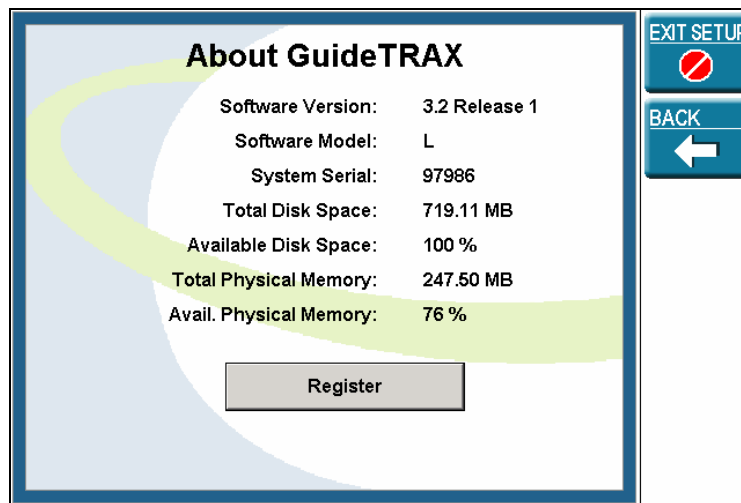


Figure 7-13: About GuideTRAX Window

Overview: The About GuideTRAX Window, see Figure 7-13 displays the version of software and pertinent information on the Saturn H system and allows the registration of e-Dif and upgrades to other models of GuideTRAX V3 (HT and HR).

Access:

SETUP ABOUT GUIDETRAX

Name	Function
REGISTER Button	The REGISTER button opens the Register GuideTRAX window.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.1.1 Register

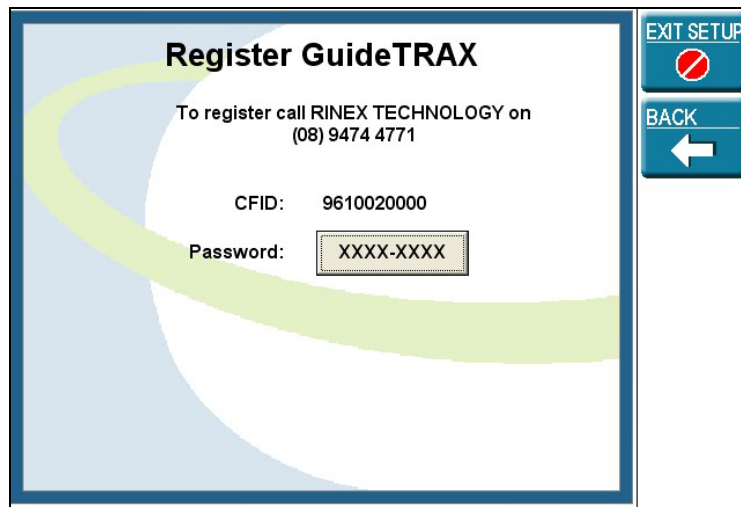


Figure 7-14: Register GuideTRAX Window

Overview: The Register GuideTRAX Window, see Figure 7-14 allows entry of a Password (registration code).

Access:

SETUP ABOUT GUIDETRAX
REGISTER

Name	Function
PASSWORD Button	The PASSWORD button selects the keyboard to allow the password (registration code) to be entered. The password must be obtained from RINEX.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.2 Display Setup

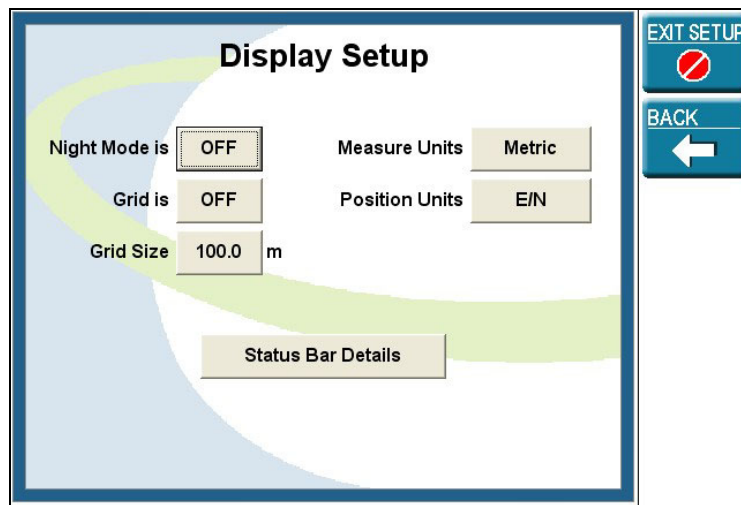


Figure 7-15: Display Setup Window

Overview: The Display Setup Window, see Figure 7-15 allows the display screen to be configured and Status Bar messages to be selected.

Access:

SETUP DISPLAY SETUP

Name	Function
NIGHT MODE Button	The NIGHT MODE button turns Nightmode ON or OFF. When ON, Night Mode turns the background from white to black. Text is then displayed in white, and Guide Points (A & B) are displayed in grey.
GRID Button	The GRID button turns the grid ON or OFF on the Map screen.
GRID SIZE Button	The GRID SIZE button selects a keyboard to enter a value for the grid spacing.
MEASURE UNITS Button	The MEASURE UNITS button allows units of measurement which are displayed on the screen to be set to either Metric or Imperial.

POSITION UNITS Button	The POSITION UNITS button sets how the position units will be displayed in the Status Bar. Units can be in either Cartesian coordinates (E/N - Easting & Northing) or geographical (Latitude & Longitude).
STATUS BAR DETAILS Button	The STATUS BAR button selects the Status Bar Window for selection of information to be displayed.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.2.1 Status Bar Setup

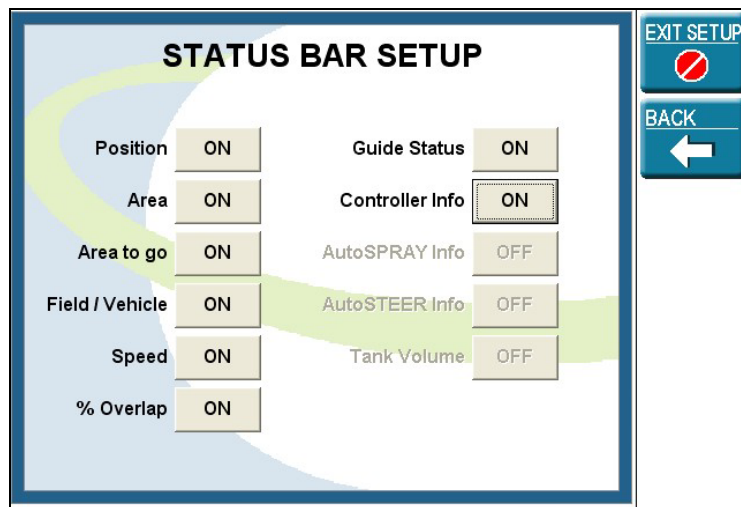


Figure 7-16 : The Status Bar Setup Window

Overview: The Status Bar Setup Window, see Figure 7-16 allows the Status Bar messages to be selected.

Access: **SETUP** **DISPLAY SETUP**
STATUS BAR DETAILS

Each of the Status Bar Setup buttons can be toggled ON or OFF to turn the display of the corresponding Status Bar message on or off. See Section 2.6 for more information relating to Status Bar messages.

Name	Function
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.3 Vehicle Setup

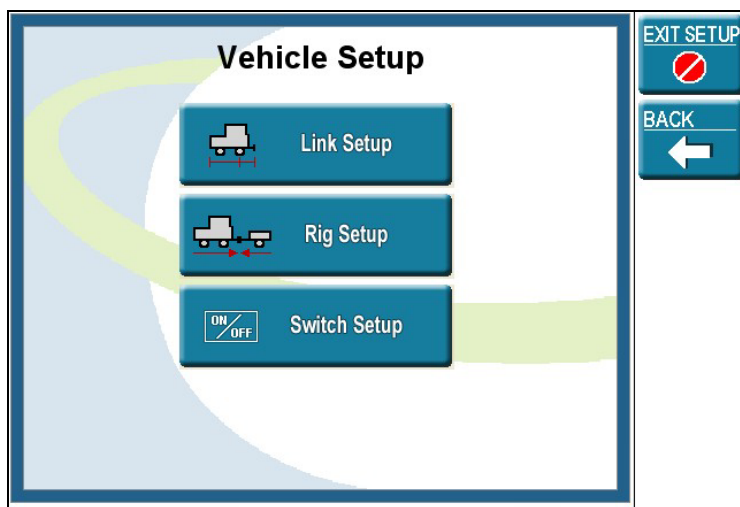







Figure 7-17: The Vehicle Setup Menu

Overview: The Vehicle Setup Menu, see Figure 7-17 is for entering information on plant and equipment on the farm.

Access: **SETUP VEHICLE SETUP**

Name	Button	Function
LINK SETUP Button		The LINK SETUP button will select the Link Setup Window for selection and editing of links.
RIG SETUP Button		The RIG SETUP button will select the Edit Rig Window to the rig to be edited.
SWITCH SETUP Button		The SWITCH SETUP button will select the Switch Setup Window to allow switch selection.
EXIT SETUP Button		The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button		The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.3.1 Link Setup

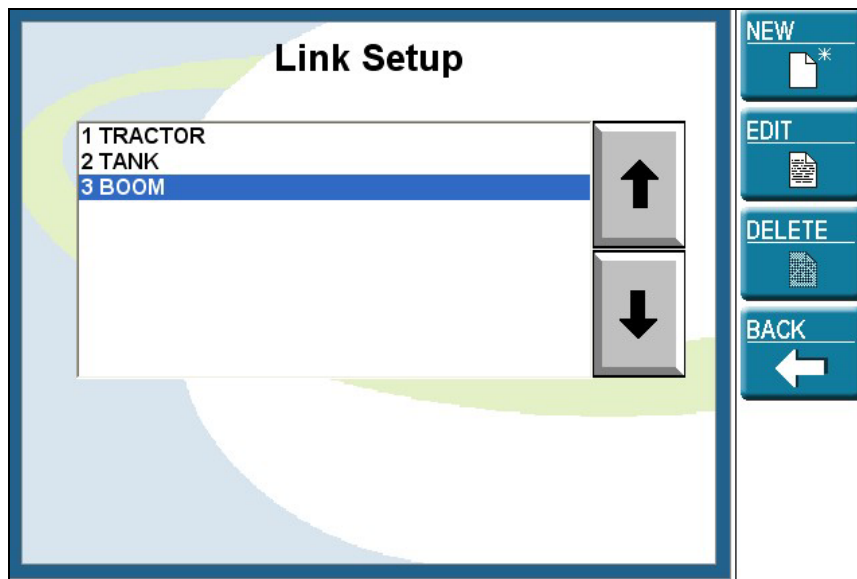


Figure 7-18 Link Setup Window

Overview: The Link Setup Window as shown in Figure 7-18 allows the Vehicle and Implement Link details to be entered and edited as required.

Access: **SETUP** **VEHICLE SETUP** **LINK SETUP**

Name	Function
↑ (UP) Button	The UP button moves the selection bar up the list of available links.
↓ (DOWN) Button	The DOWN button moves the selection bar down the list of available links.
NEW Button	The NEW button will select the Link Wizard to allow entry of a new link.
EDIT Button	The EDIT button will select the Link Wizard so the selected link maybe edited.
DELETE Button	The DELETE button will select the warning message Window so that the selected link maybe deleted.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

• Link Setup Wizard Step 1

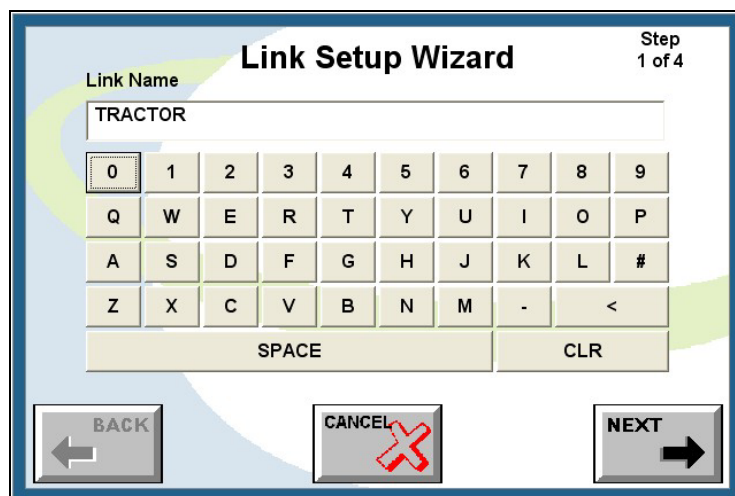


Figure 7-19: The Link Setup Wizard Step 1

Overview: The Link Setup Wizard Step 1 as shown in Figure 7-19 allows Link name to be entered and edited as required. See Section 3 for more information about setting up links.

Access: **SETUP VEHICLE SETUP LINK SETUP**
NEW OR EDIT

Name	Function
BACK Button	The BACK button is not available in the Link Wizard Step 1.
CANCEL Button	The CANCEL button will ignore any changes or selected actions, close the Wizard and return to the Link Setup window.
NEXT Button	The NEXT button will select Step 2 of the Link Wizard.

• Link Setup Wizard Step 2

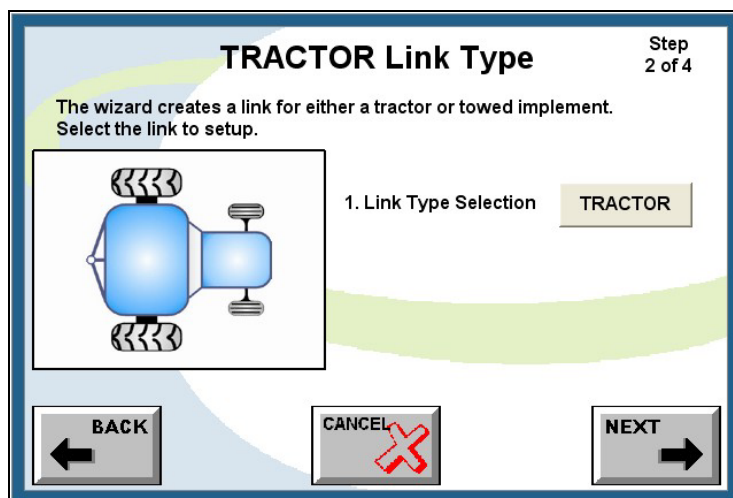



Figure 7-20: The Link Setup Wizard Step 2

Overview: The Link Setup Wizard Step 2 as shown in Figure 7-20 allows Link type to be selected. See Section 3 for more information about setting up links.

Access: **SETUP** **VEHICLE SETUP** **LINK SETUP**
NEW **OR** **EDIT** **NEXT**

Name	Function
LINK TYPE SELECTION Button	The LINK TYPE SELECTION button allows selection of a TRACTOR, ARTICULATED or IMPLEMENT link type. Note: In EDIT mode, this setting cannot be changed. If the Link Type needs to be changed, then the link must be deleted and a new link created.
BACK Button	The BACK button will update the selected actions, close the Window and return to Link Wizard Step 1.
CANCEL Button	The CANCEL button will ignore any changes or selected actions, close the Wizard and return to the Link Setup Window.
NEXT Button	The NEXT button will select Step 3 of the Link Wizard.

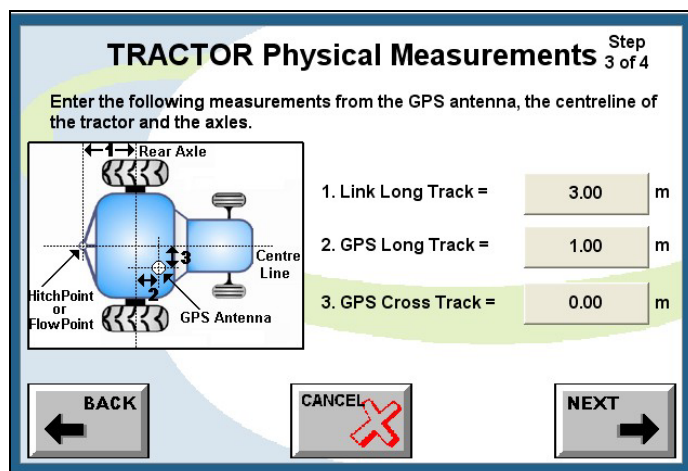• Link Setup Wizard Step 3



TRACTOR Physical Measurements Step 3 of 4

Enter the following measurements from the GPS antenna, the centreline of the tractor and the axles.

1. Link Long Track = 3.00 m

2. GPS Long Track = 1.00 m

3. GPS Cross Track = 0.00 m

BACK CANCEL NEXT


Figure 7-21: The Link Setup Wizard Step 3

Overview: The Link Setup Wizard Step 3 as shown in Figure 7-21 allows Link measurements to be entered. See Section 3 for more information about setting up links.

Access: **SETUP VEHICLE SETUP LINK SETUP**
NEW OR EDIT NEXT NEXT

Name	Function
LINK LONG TRACK Button	The LINK LONG TRACK button opens the numerical keyboard to enter the value of the Link Long Track.
GPS LONG TRACK Button	The GPS LONG TRACK button opens the numerical keyboard to enter the value of the GPS Long Track.
GPS CROSS TRACK Button	The GPS CROSS TRACK button opens the numerical keyboard to enter the value of the GPS Cross Track.
BACK Button	The BACK button will update the selected actions, close the Window and return to Link Wizard Step 2.
CANCEL Button	The CANCEL button will ignore any changes or selected actions, close the Wizard and return to the Link Setup Window.
NEXT Button	The NEXT button will select Step 4 of the Link Wizard.

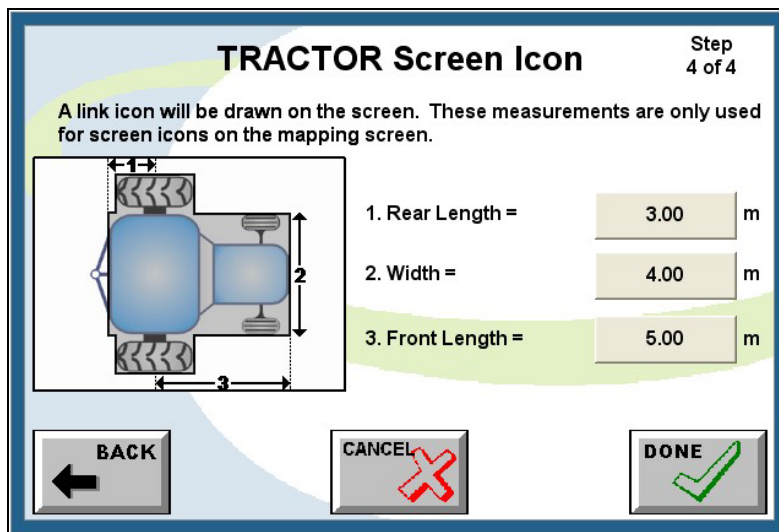
• Link Setup Wizard Step 4



Step
4 of 4

TRACTOR Screen Icon

A link icon will be drawn on the screen. These measurements are only used for screen icons on the mapping screen.



1. Rear Length = m

2. Width = m

3. Front Length = m

← BACK
CANCEL ✖
DONE ✔

Figure 7-22: The Link Setup Wizard Step 4

Overview: The Link Setup Wizard Step 4 as shown in Figure 7-22 allows measurements to be entered for how the link is displayed on the screen. These measurements do not affect treatment recording or any other operation. See Section 3 for more information about setting up links.

Access:

SETUP VEHICLE SETUP LINK SETUP
NEW OR EDIT NEXT NEXT NEXT

Name	Function
REAR LENGTH Button	The REAR LENGTH button opens the numerical keyboard to enter the value of the Rear Length.
WIDTH Button	The WIDTH BUTTON opens the numerical keyboard to enter the value of the Width.
FRONT LENGTH Button	The FRONT LENGTH button opens the numerical keyboard to enter the value of the Front Length.
BACK Button	The BACK button will update the selected actions, close the Window and return to Link Wizard Step 3.

CANCEL Button	The CANCEL button will ignore any changes or selected actions, close the Wizard and return to the Link Setup Window.
DONE Button	The DONE button will update the selected actions, close the Window and return to the Link Setup Window.

7.3.3.2 Rig Setup

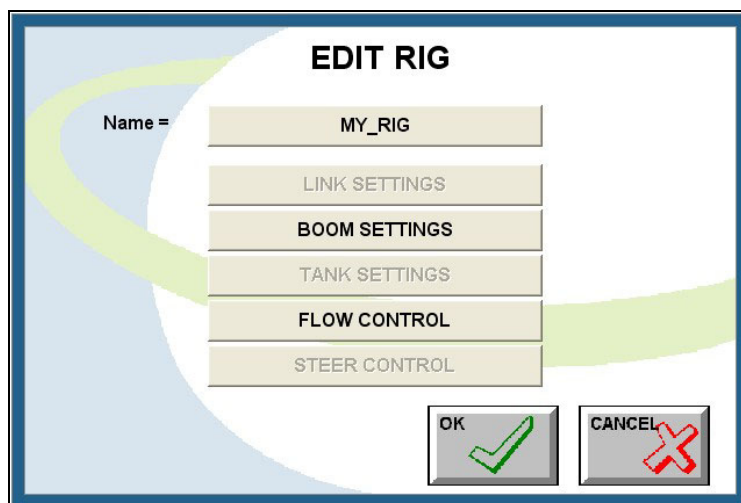


Figure 7-23: EDIT RIG Window

Overview: The EDIT RIG Window as shown in Figure 7-23 allows the individual parameters of the rig to be configured

Access: **SETUP VEHICLE SETUP RIG SETUP**

Name	Function
NAME Button	The NAME button selects the alphanumeric keyboard to enter the name of the rig.
BOOM SETTINGS Button	The BOOM SETTINGS Button selects the Boom Settings Window to enter the number of sections and their respective widths that make up the boom associated with the rig.
FLOW CONTROL Button	The FLOW CONTROL button selects the Flow Control Settings button to select the flow controller that is used on the rig.
OK Button	The OK button will update the selected actions, close the Window and return to the previous Menu.
CANCEL Button	The CANCEL button will ignore any selected actions, close the Window and return to the previous Menu.

• BOOM SETTINGS

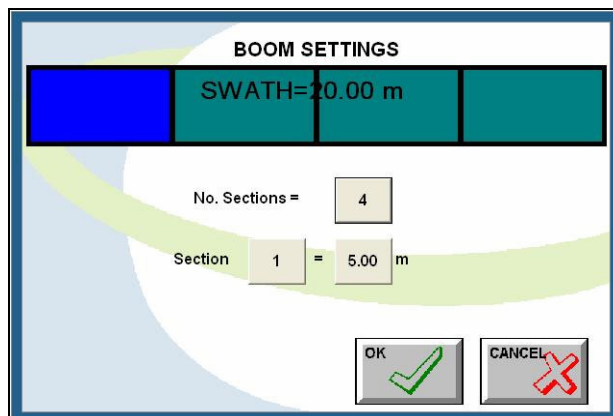


Figure 7-24: The Boom Settings window

Overview: The Boom Settings window, shown in Figure 7-24 allows the number of boom sections and the width of each boom section to be changed.

Access: **SETUP VEHICLE SETUP RIG SETUP**
BOOM SETTINGS

Name	Function
NO. SECTIONS Button	The NO. SECTIONS button displays the Number of Boom Sections window from which the number of boom sections is changed.
SECTION Button	The SECTION button toggle between each boom section, displaying the width of the section on the adjacent button
SECTION WIDTH Button	The SECTION WIDTH button displays the numeric keyboard window. The width of the currently selected section can be changed.
OK Button	The OK button will update the selected actions, close the Window and return to the previous Menu.
CANCEL Button	The CANCEL button will ignore any selected actions, close the Window and return to the previous Menu.

- **Number of Boom Sections**

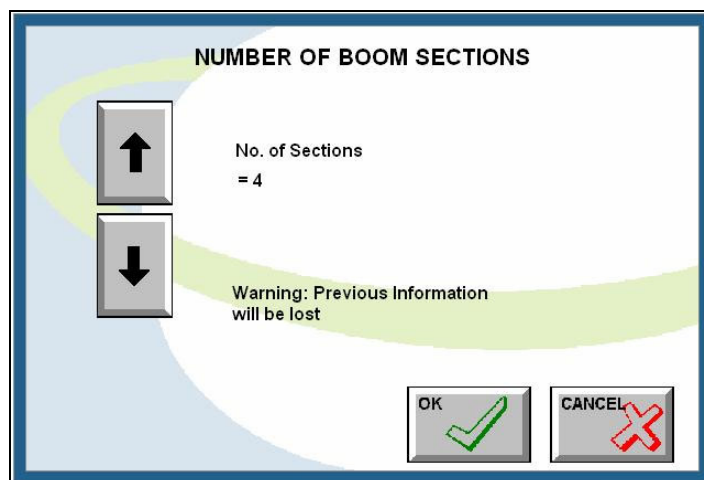


Figure 7-25: The Number of Boom Sections window

Overview: The Number Of Boom Sections Window as shown in Figure 7-25 allows the number of sections in the boom to be configured.

Access: **SETUP VEHICLE SETUP RIG SETUP**
BOOM SETTINGS NO. SECTIONS

Name	Function
↑ (UP) Button	The UP button increases the number of boom sections by one until a maximum of 32 sections is reached.
↓ (DOWN) Button	The DOWN button decreases the number of boom sections by one until a minimum of one section is reached.
OK Button	The OK button will update the selected actions, close the Window and return to the previous Menu.
CANCEL	The CANCEL button will ignore any selected actions, close the Window and return to the previous Menu.

• FLOW CONTROL

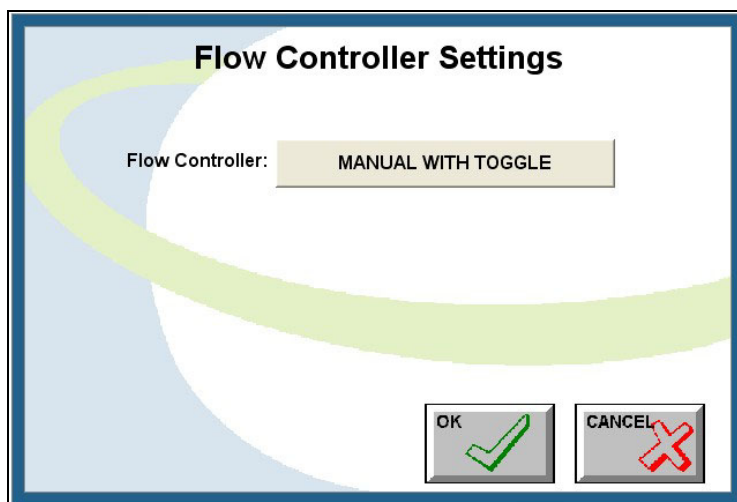


Figure 7-26: The Flow Controller Settings window

Overview: The Flow Controller Settings window, shown in Figure 7-26 allows the type of flow controller to be selected.

Access: **SETUP VEHICLE SETUP RIG SETUP**
FLOW CONTROLLER

Name	Function
FLOW CONTROLLER Button	The FLOW CONTROLLER button displays a list of flow controllers compatible with GuideTRAX 3. The required flow controller can be selected from the available list of controllers. Refer to Table 7-1 to see what information is reported by compatible flow controllers.
OK Button	The OK button will update the selected actions, close the Window and return to the previous Menu.
CANCEL Button	The CANCEL button will ignore any selected actions, close the Window and return to the previous Menu.

Table 7-1: GuideTRAX V3 - Flow Controller Compatibility Chart

Compatible Flow Controllers	Send Master	Receive Master	Read Sections	Read Boom Configurations
Apollo 8000	✗	✓	✗	✗
BA7000	✗	✓	✓	✗
Farmscan 2400	✓	✗	✓	✓
Farmscan 24v1	✓	✗	✓	✓
Hardi 5500	✗	✓	✓	✓
KEE Eagle	✗	✓	✓	✗
MSBI	✗	✓	✓	✗
Raven Series	✗	✓	✓	✓
RINEX Toggle Box	✗	✓	✗	✗
John Deere SprayStar (available on CANbus ONLY)	✗	✓	✗	✗

Interface cables to suit each particular controller may be purchased from RINEX.



Feature Available



Feature Un-available

7.3.3.3 Switch Setup

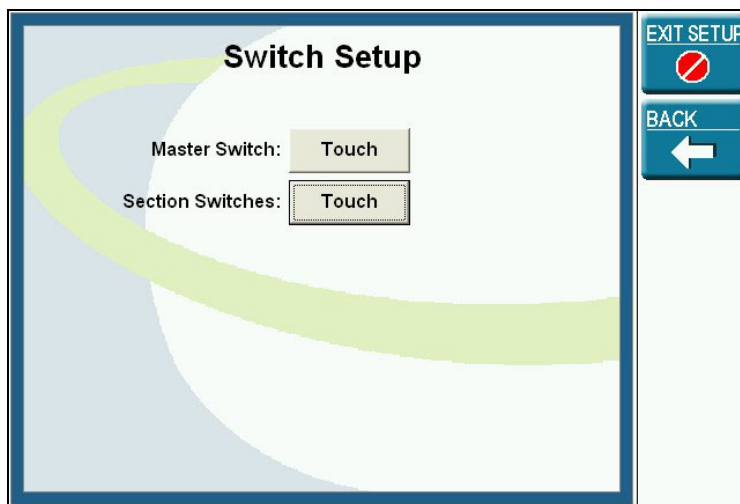


Figure 7-27: The Switch Setup Window

Overview: The Switch Setup window, see Figure 7-27 allows the system to be configured with different switches for starting and stopping of recorded treatment data.

Access:

**SETUP VEHICLE SETUP
SWITCH SETUP**

Name	Function
MASTER SWITCH Button	The MASTER SWITCH button selects the switch device that is used for starting and stopping of recorded treatments.
SECTION SWITCHES Button	The SECTION SWITCHES button selects the device that is used for starting and stopping of individual boom sections treatments.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.4 Guide Options

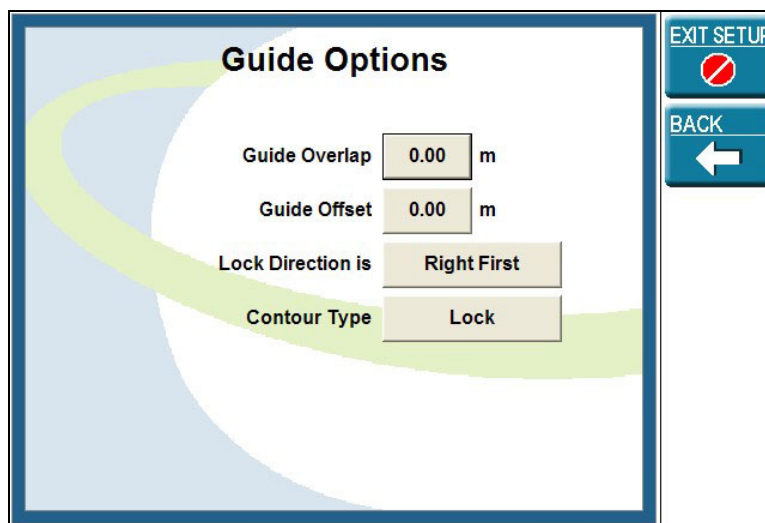


Figure 7-28: The Guide Options Window

Overview: The Guide Options window, see Figure 7-28 allows selection and editing of guidance options..

Access: **SETUP MORE GUIDE OPTIONS**

Name	Function
GUIDE OVERLAP Button	The GUIDE OVERLAP button selects a keyboard to enter a value for guide overlap. The guide overlap value results in an overlap in treatment. See Section 5.3.1.
GUIDE OFFSET Button	The GUIDE OFFSET button selects a keyboard to enter a value for guide offset. The guide offset value shifts the parallel guidelines (AB points) for the whole farm. See Section 5.3.2.

LOCK DIRECTION Button	<p>The LOCK DIRECTION button selects the search pattern for Lock guidance, based on the previous treatment swath. A previous treatment swath must be within one swath width of the vehicle for a guideline to be generated.</p> <p>Right First – searches for a previous treatment swath on the Right first. If no previous treatment swath is found, it searches on the left.</p> <p>Left First – searches for a previous treatment swath on the Left first. If no previous treatment swath is found, it searches on the right.</p> <p>Right Only – searches only to the right for a previous treatment swath.</p> <p>Left Only – searches only to the left for a previous treatment swath.</p>
CONTOUR TYPE Button	<p>The CONTOUR TYPE button is not operational in the HL Model.</p>
EXIT SETUP Button	<p>The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.</p>
BACK Button	<p>The BACK button will update the selected actions, close the Window and return to the previous Menu.</p>

7.3.5 Lightbar Setup

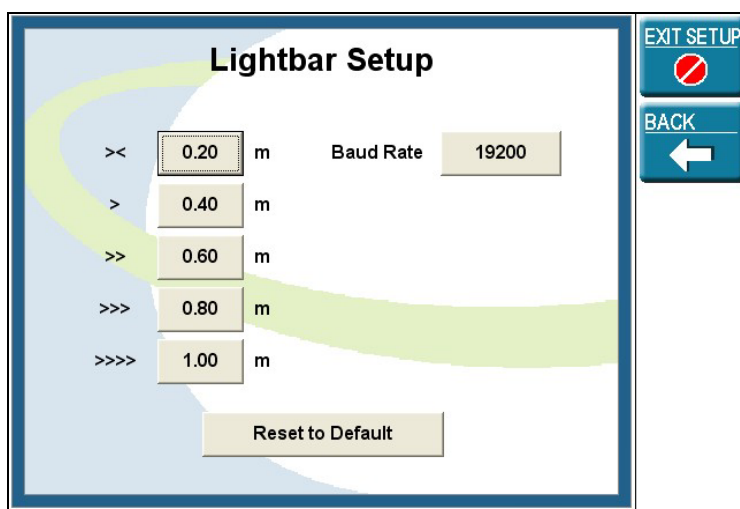


Figure 9-15: The Lightbar Setup Window

Overview: The Lightbar Setup window, see Figure 7-28 allows editing of lightbar guidance/distance limits and baud rate (communication speed). See Section 6.3.4 for more information about how to set the lightbar limits.

Access: **SETUP MORE LIGHTBAR SETUP**

Name	Function
>< Button	The >< button selects the keyboard for the value (between 0 to 100 metres) to be entered. The value must be greater than 0m and less than the > value.
> Button	The > button selects the keyboard for the value to be entered. The value must be greater than the>< value and less than 100m.
>> Button	The >> button selects the keyboard for the value to be entered. The value must be greater than the> value and less than 100m.
>>> Button	The >>> button selects the keyboard for the value to be entered. The value must be greater than the>> value and less than 100m.

>>>> Button	The >>> button selects the keyboard for the value to be entered. The value must be greater than the>>> value and less than 100m.
BAUD RATE Button	The BAUD RATE button allows lightbars which communicate at different baud rates to be used with the Saturn H series.
RESET TO DEFAULT Button	Touching the RESET TO DEFAULT button returns all Lightbar settings to factory defaults.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.6 Virtual Road Setup

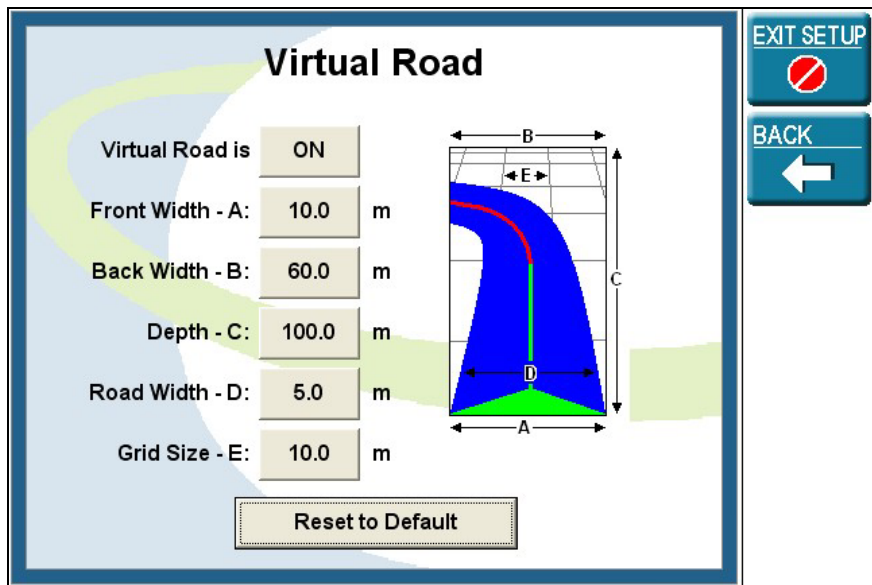


Figure 7-29: The Virtual Road Window

Overview: The Virtual Road window, see Figure 7-29 allows editing of virtual road dimensions. See Section 6.3.3 for more information about customising the Virtual Road.

Access: **SETUP MORE VIRTUAL ROAD SETUP**

Name	Function
VIRTUAL ROAD Button	The VIRTUAL ROAD button turns the Virtual Road window ON or OFF. When ON, the Virtual Road window appears to the left of the Map screen. When OFF, the Virtual Road window disappears from the Main screen, enlarging the Map screen.
FRONT WIDTH Button	The FRONT WIDTH button opens the numerical keyboard to enter the value of the front width of the Virtual Road.
BACK WIDTH Button	The BACK WIDTH button opens the numerical keyboard to enter the value of the back width of the Virtual Road.

DEPTH Button	The DEPTH button opens the numerical keyboard to enter the value of the depth of the Virtual Road.
ROAD WIDTH Button	The ROAD WIDTH button opens the numerical keyboard to enter the value of the road width of the Virtual Road.
GRID SIZE Button	The GRID SIZE button opens the numerical keyboard to enter the value of the grid size displayed in the Virtual Road window
RESET TO DEFAULT Button	Touching the RESET TO DEFAULT button returns all Virtual Road settings to factory defaults.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.7 GPS Setup

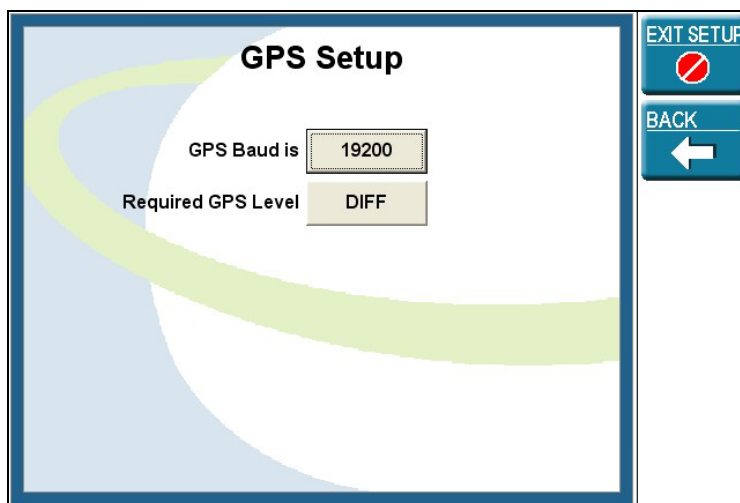


Figure 7-30: The GPS Setup Window

Overview: The GPS Setup window, see Figure 7-30 allows selection of GPS accuracy level, interface/connection type and Baud rate (communication speed). See Section 6.1 for more information about GPS configurations.

Access: **SETUP** **MORE** **GPS SETUP**

Name	Function
REQUIRED GPS LEVEL Button	<p>The REQUIRED GPS LEVEL button allows selection of the level of accuracy required.</p> <p>DIFF – differentially corrected GPS data. DIFF is the recommended level.</p> <p>GPS – uncorrected GPS data. Less accurate than DIFF.</p>
CONNECTION TYPE Button	<p>The CONNECTION TYPE button toggles between Serial and CANbus depending on which type of interface connection the GPS receiver has.</p> <p>CANbus is an optional extra on the Saturn HT which must be purchased. Where possible GuideTRAX V3 will auto detect the Connection Type.</p>

GPS BAUD Button	The GPS BAUD button allows the serial baud rate setting in GuideTRAX V3 to be selected to match that of the GPS receiver. Possible values are 4800, 9600 or 19200. As the baud rate is only applicable to serial connections this button will not be available if CANbus connection type is selected.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.

7.3.8 Remote Buttons

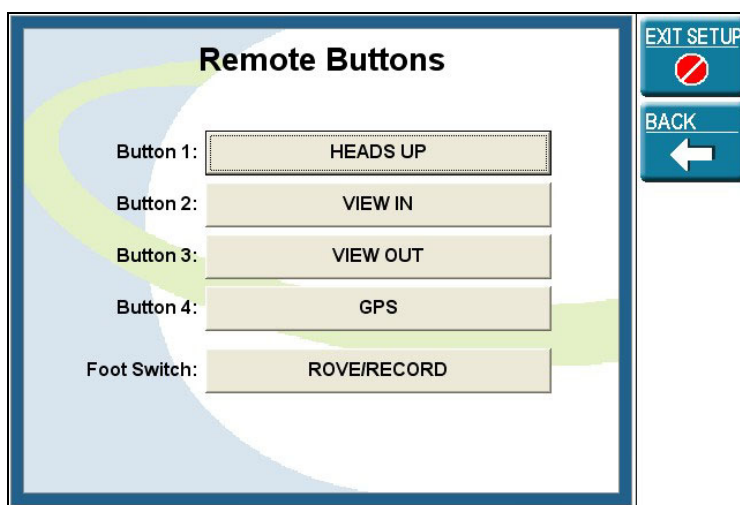


Figure 7-31: The Remote Buttons Window

Overview: The Remote Buttons window, see Figure 7-31 allows the RINEX Button Box and Footswitch to be configured. See Sections 6.6 and 6.7 for a complete list of each function and for more information about configuring Remote Buttons.

Access: **SETUP MORE REMOTE BUTTONS**

Name	Function
BUTTON 1 Button	BUTTON 1 selects the Remote Buttons Window from which a function for the Button may be selected. If no Button box is attached the setting will have no effect.
BUTTON 2 Button	BUTTON 2 selects the Remote Buttons Window from which a function for the Button may be selected. If no Button box is attached the setting will have no effect.
BUTTON 3 Button	BUTTON 3 selects the Remote Buttons Window from which a function for the Button may be selected. If no Button box is attached the setting will have no effect.
BUTTON 4 Button	BUTTON 4 selects the Remote Buttons Window from which a function for the Button may be selected. If no Button box is attached the setting will have no effect.

FOOT SWITCH Button	The FOOT SWITCH button selects the Remote Buttons Window from which a function for the Foot Switch may be selected. If no Foot Switch is attached the setting will have no effect.
EXIT SETUP Button	The EXIT SETUP button will update the selected actions, close the Window and return to the Main menu.
BACK Button	The BACK button will update the selected actions, close the Window and return to the previous Menu.



8

The Launcher

The Launcher is a utility that is pre-installed onto the Saturn H systems. It is a maintenance program that is used to perform various functions such as resetting the system, upgrading software and accessing advanced tools.

In normal operation, the Launcher program will not be seen. The system will automatically start GuideTRAX V3 when the system is activated.

8.1 Opening the Launcher

When it is necessary to open the Launcher program to perform any of the Launcher functions, the following steps must be taken.

- 1) Turn the vehicle ignition OFF.
- 2) Power down the Saturn H interface box by turning the IPS on the interface box to the OFF (0) position.
- 3) Start the vehicle ignition.
- 4) After the vehicle has started, power up the Saturn H system interface box by turning the IPS on the interface box to the ON (-) position.
- 5) The Saturn H system will now start up displaying the following screens. As the system is starting up, it will display the two screens shown in Figure 8-1, and Figure 8-2 below:



Figure 8-1: The RINEX First Startup Screen



Figure 8-2: The Startup Screen of the Launcher

Hints and Tips:

- ◆ *The system will revert to the normal starting procedure after it is shutdown.*
- ◆ *The Launcher can be navigated using a standard PS2 Keyboard connected to the KDB port on Saturn H Interface box. To use a keyboard each Launcher button position is assigned a function key, F1 though to F6. e.g. F1 is the top button, F2 is the second button down, F3 is the third, and so on.*

8.2 Using the Launcher



Figure 8-3: The Startup Window of the Launcher

Overview: The Launcher buttons and their functions are listed below:

Item	Description
Start GuideTRAX Button	The START GuideTRAX button will close the Launcher program and open GuideTRAX V3.
Enter Launcher Button	The ENTER LAUNCHER button will open the Launcher Main Window. See Section 8.2.1 for more details.

8.2.1 Launcher Main Menu



Figure 8-4: The Launcher Main Menu

Overview: The Launcher buttons and their functions are listed below:

Item	Description
START GuideTRAX Button	The START GuideTRAX button will close the Launcher program and open GuideTRAX V3.
UPGRADE SOFTWARE Button	The UPGRADE SOFTWARE button will connect to the USB and then proceed to copy the latest software to the system. A message seeking confirmation will be displayed before any files are copied.
SYSTEM TOOLS Button	The SYSTEM TOOLS button will display the System Tools window containing repair and reset options that can be selected. See section 8.2.2 for more details.

Item	Description
UTILITIES Button	The UTILITIES button will open a window from which a password can be entered. The correct password must be entered before the Utilities menu can be accessed. Please call RINEX if you wish to access the Utilities menu. The Utilities menu contains access to various troubleshooting utilities. See Section 8.2.3 for more details.
CALIBRATE Button	The CALIBRATE button allows the touch screen to be calibrated. The appropriate calibration program for your touch screen will be opened when the Calibrate button is tapped. Follow the onscreen instructions of the calibration program to calibrate your touch screen.
RESTART SYSTEM Button	The RESTART SYSTEM button will restart the system.

8.2.2 System Tools

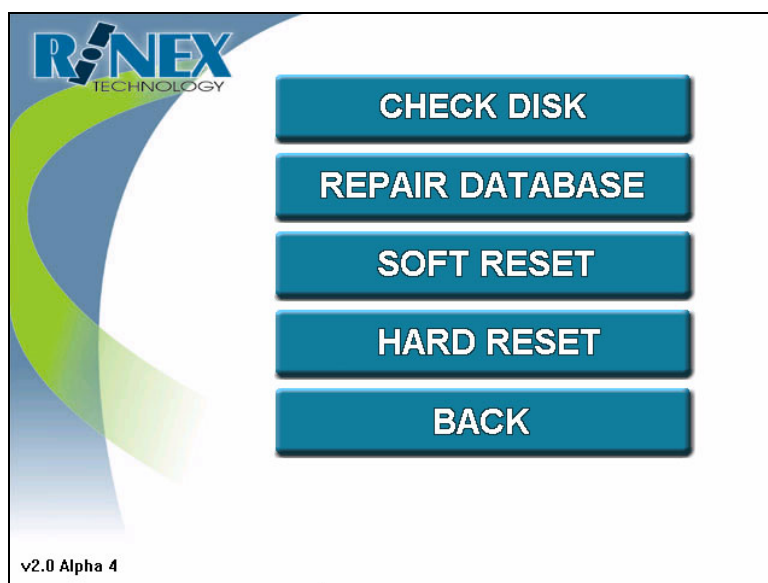


Figure 8-5: The System Tools Menu

Overview: System Tools allows diagnostic and database repair functions to be run and also allows the system to be reset so that the factory settings are restored.

Item	Description
CHECK DISK Button	The CHECK DISK button checks the disk for errors, repairs any errors, reports the results to the screen.
REPAIR DATABASE Button	The REPAIR DATABASE button runs the Repair Database function.
SOFT RESET Button	The SOFT RESET button resets certain system settings, deletes all data from the nine paddock Virtual Memory and restarts the system. All GuideTRAX V3 settings will remain after a soft reset.
HARD RESET Button	The HARD RESET button will restore the factory settings and restart the system. All data that has been recorded will be deleted and all settings will be set back to the default factory settings.

Item	Description
BACK Button	The BACK button will return to the Launcher Main window.

Hints and Tips:

- ◆ *You will be asked to confirm the actions of Soft and Hard Reset*
- ◆ *GuideTRAX V3 settings (e.g., vehicle settings) can be restored after a Hard Reset if they have been previously backed up. See Section 8.2.5.1*

8.2.3 Utilities



Figure 8-6: The Utilities Menu

Overview: Utilities allows diagnostic and configuration functions to be run.

Item	Description
WINDOWS SHELL Button	The WINDOWS SHELL button will display the Windows Shell interface from which commands can be entered using a keyboard.
GPS TOOLS Button	The GPS TOOLS button displays the GPS TOOLS menu to allow interrogation and configuration of selected GPS receivers.
RINEX TOOLS Button	The RINEX TOOLS button displays the RINEX Tools menu to allow the system date/time to be set, database upgrades, hardware diagnostic and communications utilities to be run.
ADVANCED Button	The ADVANCED button displays the Advanced Utilities menu to allow system backup files to be created and restored, screen drivers to be changed and log files to be exported.
BACK Button	The BACK button will return to the Launcher Main Window.

8.2.4 GPS Tools



Figure 8-7: The GPS Tools Menu

Overview: GPS Tools allows selected GPS receiver utilities to be run.

WARNING: The **TOOLKIT** button when connected to any receiver **OTHER THAN Ag114, 3000L, G12 or GEM** could cause the receiver to lose its settings.

Item	Description
TERMINAL Button	The TERMINAL button starts a terminal program so that incoming serial data can be viewed.
AGREMOTE Button	The AG REMOTE button starts the AG Remote program for configuring Trimble and OmniLite receivers.
TOOLKIT Button	The TOOLKIT button will open the Toolkit program for used to configure and check the status of some GPS receivers.
JD STARFIRE ITC Button	The JD STARFIRE ITC button will start the John Deere Starfire ITC Configuration utility (suitable for configuring only Starfire ITC receivers).

Item	Description
JD STARFIRE Button	The JD STARFIRE button will start the John Deere Starfire Configuration utility (suitable for configuring only Starfire 2 receivers).
BACK Button	The BACK button will return to the Utilities Menu.

8.2.5 RINEX Tools

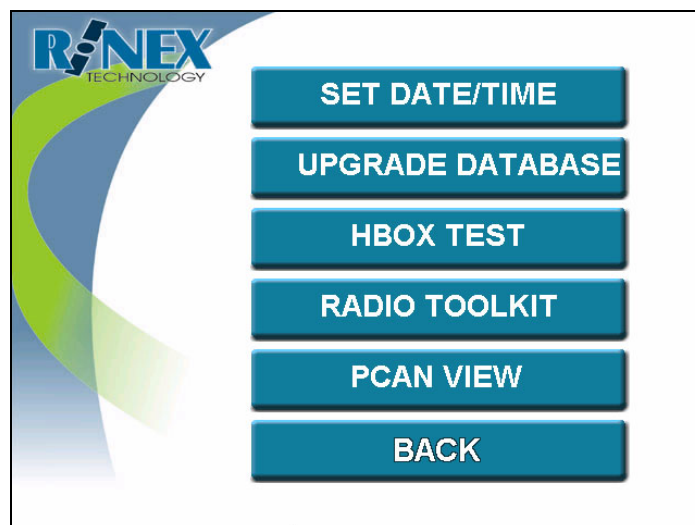


Figure 8-8: The RINEX Tools Menu

Overview: The RINEX Tools menu allows various RINEX tools to be used.

Item	Description
SET DATE & TIME Button	The SET DATE & TIME button displays the Set Date and Time window, allowing the correct date and time to be set.
UPGRADE DATABASE Button	The UPGRADE DATABASE button displays the Upgrade Database window, allowing the GuideTRAX database version to be updated.
HBOX TEST Button	The HBOX TEST button will start the Test Box set of testing functions which test all input and output interfaces on the H Box.
RADIO TOOLKIT Button	The RADIO TOOLKIT button starts the Radio Toolkit to enable the GroupID for FieldNET to be configured.
PCANVIEW Button	The PCANVIEW button starts the PCANView utility to allow display of CANbus information.
BACK Button	The BACK button will return to the Utilities Menu.

8.2.5.1 Advanced Utilities



Figure 8-9: Advanced Utilities Menu

Overview: The Advanced Utilities Menu enables backup files of software settings to be created and restored, screen drivers to be changed and error log files to be exported.

Item	Description
CREATE BACKUP Button	The CREATE BACKUP button creates a backup of GuideTRAX settings (e.g., vehicle settings). If there is already a backup then a warning message will be displayed for 12 seconds, then the button will have to be pressed again to overwrite the old backup.
RESTORE BACKUP Button	The RESTORE BACKUP button restores the backup created by Create Backup. A warning message will be displayed for 12 seconds, and then the button will have to be pressed again to restore the backup and overwrite the current settings.
LOAD RNX SCREEN Button	The LOAD RNX button changes the screen drivers to the RINEX touch screen. A warning message is displayed for 12 seconds, and then the button will have to be pressed again for the screen drivers to be changed to the RINEX Screen.

Item	Description
LOAD DATALUX Button	The LOAD DATALUX button changes the screen drivers to the Datalux touch screen. A warning message is displayed for 12 seconds, and then the button will have to be pressed again for the screen drivers to be changed to the Datalux Screen.
EXPORT LOG FILES Button	The EXPORT LOG FILES button exports any system log files to the USB drive.
BACK Button	The BACK button will return to the Utilities Menu.

Hints and Tips:

- ◆ *Only ever backup settings if it is certain that all current settings are good and are not causing any problems.*
- ◆ *Restoring settings to a different version of software from which they were backed up is not recommended as unexpected problems may occur.*



9

APPENDIX



APPENDIX 1 Terminology

Phrase	Description
AutoSPRAY	AutoSPRAY is an optional extra in the RINEX guidance product range that allows the Saturn HT and HR systems to control the spraying state of the boom as the vehicle drives over a treated/non-treated area.
AutoSTEER	AutoSTEER is an optional extra in the RINEX guidance product range that allows the Saturn HT and HR systems to steer automatically along a straight line using parallel guidance providing optimal accuracy.
Boom Settings	Boom details such as the number of boom sections and the width of each section.
Button	A symbol representing a function shown on the touch screen which allows the input of data or performs a function when tapped.
Current Field	The current selected field in memory (chosen from the Memory window). The current field is where all of the treatment data will be stored when treatment is commenced.
DGPS	Differential Global Positioning System. Provides more accurate positioning information where corrections are applied to the basic GPS position.
External Button Box	An optional device that is connected to the USB port on the Interface Box. This device consists of four programmable buttons that can be used with the GuideTRAX program to perform functions without having to touch the screen.
GPS	Global Positioning System. Provides basic position information to the system.

Phrase	Description
Guideline	The red line displayed on the map screen. This line may have been created by either lock or parallel guidance.
Guide Points	A set of two positions used to compute the set of parallel guidelines when using parallel guidance.
GuideTRAX V3	The software program produced by RINEX which runs on the Saturn H system.
Launcher Program	The utility program produced by RINEX which is installed on the Saturn H system.
Lightbar	An LED device that is connected to the lightbar port on the Saturn H system that displays directional information to the operator which is typically mounted in the line of sight of the operator.
Link	Component of the vehicle measured from one pivot point to another.
Link Settings	Link details such as the number of links, the link distances and the axle distances.
Lock Guidance	The type of guidance used when working the field in either a race track or contour method.
Map Screen	The area of the screen displayed to the left of the menu buttons which displays the treatment data, the Vehicle Icon and the guideline.
Menu	A group of related buttons shown to the right of the touch screen display which allow access to other menus or functions.

Phrase	Description
Multi Section Boom Interface (MSBI)	A device that is connected to the controller port on the Saturn H system that provides an interface to the spray controller. The MSBI allows GuideTRAX to read the current status of each boom section on the spray controller and displays the status on the screen along with the treated area for each section.
Parallel Guidance	The type of guidance used when working the field in an up and back method. A set of parallel guidelines will be drawn on the screen one swath width apart.
Saturn Hardware	The hardware system installed in your vehicle cabin which is used to run GuideTRAX V3. That is the Interface Box, GPS antennae and can include any connected device, cables, connectors and the touch screen.
Saturn H Interface Box	The Interface Control Box. The main component of the Saturn H system that provides an interface to other components of the system such as the touch-screen and the GPS receiver.
Swath Width	The total width of the boom/implement.
Tap	To touch the touch screen once with your finger at an intended position on the screen. Care must be taken to tap the screen gently.
Toggle Switch	A device that is connected to the controller port on the Saturn system that allows the treatment to be turned on or off without having to touch the Vehicle Icon on the screen.
Touch-Screen	The display device which shows the progress of your operation and accepts commands by tapping buttons on the screen.

Phrase	Description
Treatment	Refers to the spraying state of the boom. If treatment is on, then the spraying state of the boom is on and treatment data will be recorded in the current field. If treatment is off, then the spraying state of the boom is off and treatment data is not recorded.
Treatment Data	The position information stored in a field when treatment is on. The treatment data is represented on the screen as a blue shaded area.
Unit	The measurement unit used to evaluate mass, volume, area, distance etc (E.g. Kilogram, Tonne and Litre)
USB Storage Device	A device that is connected to the USB port on the Saturn H system that is used to transfer files to and from the system.
Vehicle Icon (VEHICLE ICON)	The vehicle symbol displayed on the map screen which represents the vehicle as it moves around the field.
Virtual Road (VR)	The VR is displayed to the left of the map screen. It is used to display the projected road that must be taken to follow the current guideline.

APPENDIX 2 SATURN GUIDANCE SYSTEMS

The Saturn H series can be easily identified by its compact interface box as shown in Figure 9-1



Figure 9-1: The Saturn H Interface Box

The physical properties of the Saturn H series interface box are as follows

230 (w) x 65 (h) x 190 (d)

1200gm

APPENDIX 3 SYSTEM MESSAGES

Message	Probable Cause	Try This...
Could not find lock! Move and try again.	Vehicle is too far away from the previous track. Lock method may be set to 'Left Only' or 'Right Only'.	Move within 1 swath widths of the track from which you want to follow. Check lock direction setting from Guide Options (Section 7.3.4).
Points too close! Move and try again.	Parallel Point B was set too close to Point A.	Move the vehicle and set Parallel Point B again.
Key line already defined! Delete line?	A parallel line has already been set. System checks to make sure you want to delete the parallel line when you try to create a new one.	Press Ok if you wish to delete the current parallel line and create a new one. Press cancel if you want to keep working on the current parallel line.
Could not open port:	Another program or device is occupying the communications port.	Try closing/disconnecting the device. If there is nothing that appears to be occupying the port, try restarting the system.
Please stop treatment before going to field menu	Treatment was on when the field menu button was pressed. When in the FIELD menu the GPS information is ignored so treatment cannot be recorded while in the field menu.	Turn treatment off and press the Field menu button again.

Message	Probable Cause	Try This...
Transfer Completed Successfully!	Export or Import of files has been completed successfully.	No action necessary.
Please restart system for changes to take effect:	System setting was changed and system must be restarted for the change to take effect.	Restart the program by pressing turning the ignition off and then turn the ignition back on.
Warning: Disk space is low.	Too many large files exist in the Virtual Memory.	Clear space on the system by clearing completed fields in the Virtual Memory.
Error No disk space available	Too many files have been saved and there is no disk space remaining.	Clear space on the system by deleting an old season.
Error: The current position is invalid, (No valid GPS)	A parallel or treatment was attempted to be recorded while there was no GPS or the vehicle has not moved.	Move and try again or wait for good GPS signal to return.
Warning: All data in the current field will be lost. Do you wish to proceed?	A field has been loaded into the current field and the current field must be cleared for this to occur.	If you wish for the selected field to be loaded in to the current field, press ok. Else, if you wish to load the selected field into a different field, press cancel, open the correct field and then select the field for loading again.

APPENDIX 4 TROUBLESHOOTING

Problem	Probable Cause	Try This...
System does not draw a "track" behind the vehicle	Treatment is not switched to the ON state	Check in SETUP Vehicle Setup Switch Setup (Section 6.5) to ensure the correct method of switching (toggle, touch or external) is selected.
Guide line is drawn in wrong place	An offset, or overlap value has been incorrectly entered.	Ensure overlap and offset values are correctly entered in SETUP MORE Guide Options (Section 5.3).
Calculated total area is incorrect	Did not return to original start point after one complete lap.	Area will not be calculated unless field is restarted and perimeter is recorded.
Calculated treated area is incorrect.	Swath width is set incorrectly.	Restart field and change swath width to correct value (Sections 3.3.1, 4.2 and 7.3.3.2).
Toggle switch or boom controller will not turn spraying on/off	Incorrect controller is selected	Change controller in SETUP Vehicle Setup Rig Setup Flow Control (Section 6.5). If unable to change controller, restart field.
Error while writing to disk.	There has been an error while writing to a file or saving a file.	Try restarting the field.
Error reading file:	There has been an error in the file you are attempting to use.	Restart the field via the Field menu (Section 4.2).

Problem	Probable Cause	Try This...
Comm Error: Check cable connection.	There is a problem in the cabling or a cable has become disconnected.	Check that all cables are inserted correctly.
Range Error:	A value has been entered that is too large or too small	Enter another value that is within the range that is displayed in the error message.
Error Copying File:	An error occurred when a file was loaded.	Try restarting the current field and reload the file. If it occurs again, the file is corrupt. Please delete the file to avoid further complications.